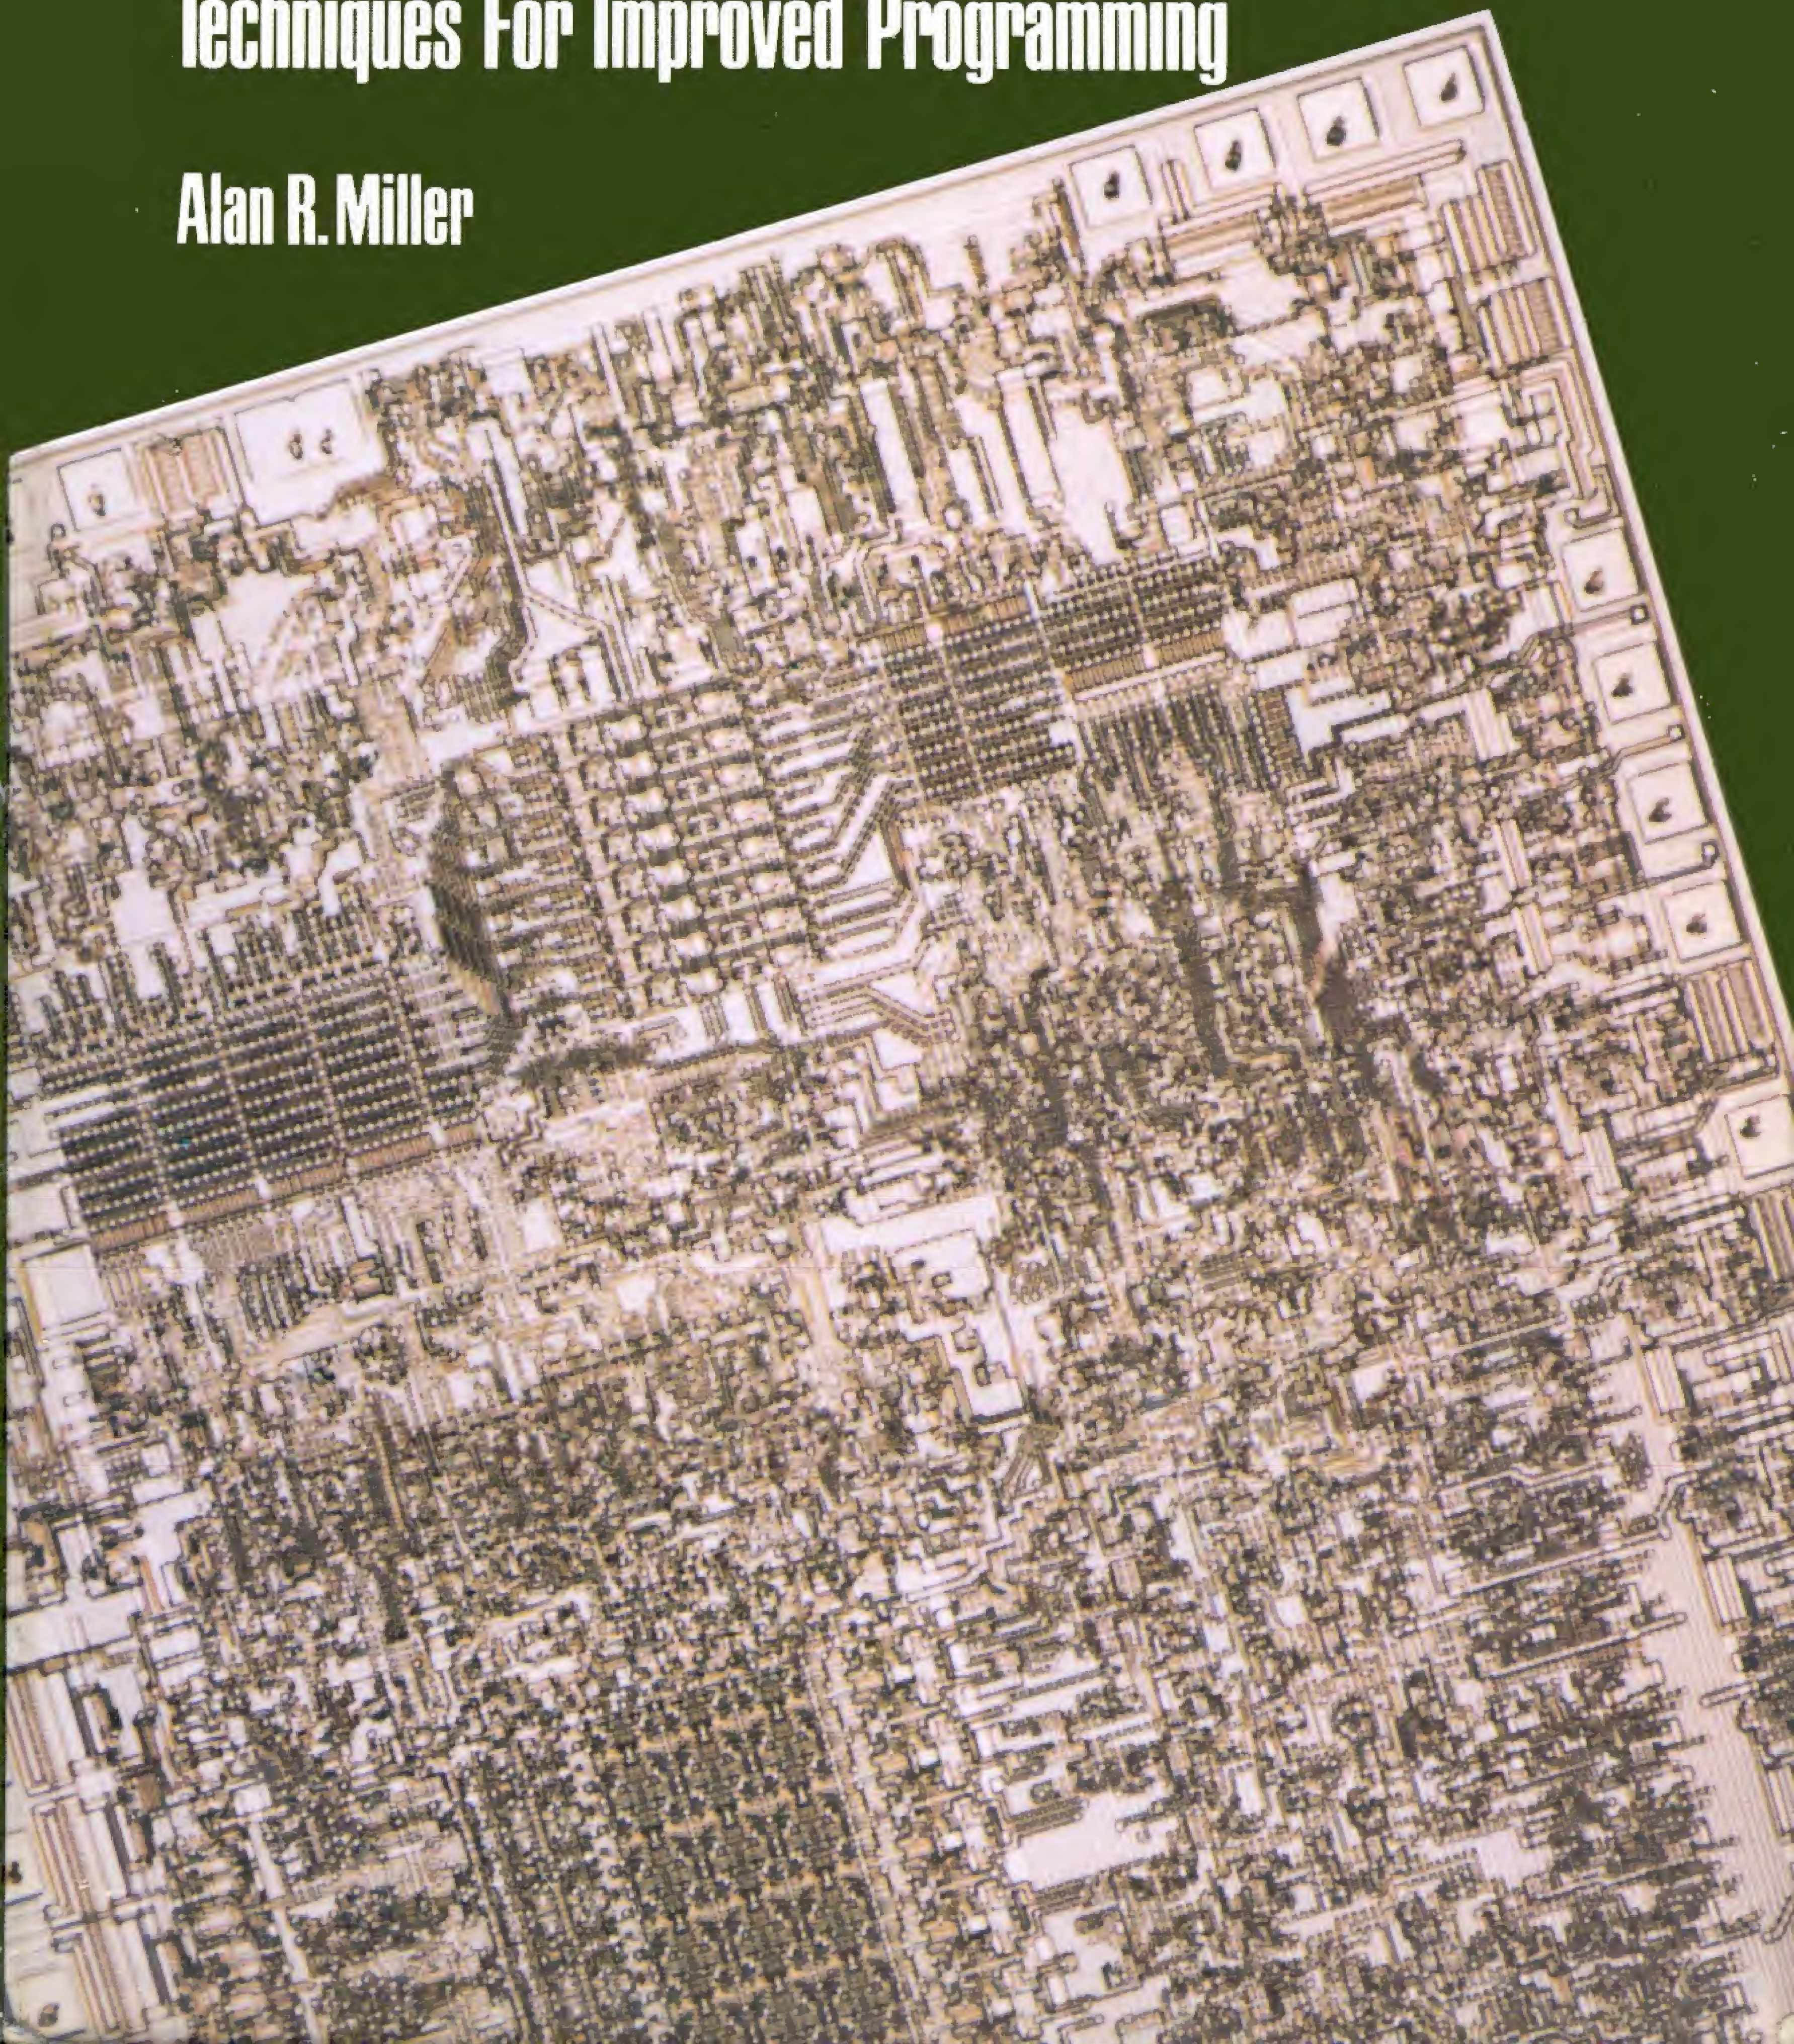# 8080/Z80 Assembly Language

Techniques For Improved Programming

Alan R. Miller

THE 8080/Z-80
ASSEMBLY LANGUAGE
TECHNIQUES FOR
IMPROVED PROGRAMMING

ALAN R. MILLER

Professor of Metallurgy
New Mexico Institute of Mining and Technology
Socorro, New Mexico

Software Editor, Interface Age
Cerritos, California

Preface

On first thought, it might seem strange that another book on the 8080 and Z-80 should appear at this time. Z-80 CPU cards generally became available in 1977 and the 8080 CPU is even older. But the Z-80 computer seems to become more popular with time. For example, the TRS-80 Model II announced recently by Radio Shack, and Heath's H-89 both use the CPU. High-level languages such as Pascal, APL, BASIC, FORTRAN, and C are now run on the 8080 and Z-80. Furthermore, Microsoft has available a Z-80 CPU card that can be easily inserted into the Apple II computer. There should be an increasing interest in the 8080 and Z-80 CPUs in the coming years, and I believe, a great increase in the number of 8080 and Z-80 programmers. So, there is a growing need for a book that covers programming for the 8080 and Z-80 assembly languages.

The combination of 8080 and Z-80 programming concepts into a single work is quite natural. The Z-80 CPU is upward compatible from the 8080 so that all commercially available 8080 software will run on the Z-80. Furthermore, 8080 assemblers, such as ASM provided with CP/M, can be used to create programs that will run on either an 8080 system or a Z-80 system.

The purpose of this book is twofold. First, I want to provide a single reference source for both 8080 and Z-80 assembly language programmers. The appendixes are designed with this goal in mind. They begin with the ASCII character set and a 64K memory map. These two appendixes are as useful to those using higher level languages as they are to assembly language programmers.

The 8080 and Z-80 instruction sets are listed both alphabetically and numerically in the next four appendixes. This is followed by a cross reference between the 8080 and the Z-80 mnemonics. An appendix describing each instruction in detail then follows. Common acronyms are identified

next in Appendix I, and some undocumented Z-80 instructions are discussed in the final appendix. Collectively, the appendixes contain all of the reference material needed to write 8080 or Z-80 assembly language programs.

The second purpose of this work is to demonstrate some useful techniques of assembly language programming. As an editor for Interface Age, I have seen numerous examples of inefficient or improper programming. General principles of assembly language programming are discussed in Chapters One through Five; specific programming examples are given in Chapters Five through Ten. The reader can actually assemble the programs and try them out.

The organization and operation of the 8080 and Z-80 CPUs is covered in Chapter One. This includes a discussion of the general-purpose registers, the flag registers, logical operations, branching, double-register operations, rotation and shifting. The concepts of hexadecimal, octal, and binary numbers, one's and two's complement arithmetic, and the use of logical operations are presented in Chapter Two.

Stack operations with PUSH, POP, CALL and RET commands and the passing of data between calling program and subroutine are given in Chapter Three. Chapter Four is devoted to input and output techniques, including an interrupt-dirven keyboard routine and a telephone transmission program. Assembler macros are discussed in Chapter Five. Examples show how to generate Z-80 instructions with an 8080 macro assembler, and how to emulate Z-80 instructions on an 8080 CPU.

The reader can develop a small, powerful monitor in Chapter Six using the top-down programming method. The monitor contains the usual commands of dump, load, and go. In addition, there is a memory test, a routine to search for one or two hex bytes or ASCII characters, a routine to replace all occurrences of one byte with another, and a routine to perform input and output through any port.

In Chapter Seven the monitor is converted to Z-80 instructions and some additional features are added. Assembly-language subroutines for inter-converting between binary numbers and ASCII characters coded in one of the common number bases are given in Chapter Eight. These routines perform all of the input and output through the system monitor developed in Chapter Six. Paper tape and magnetic tape routines are given in Chapter Nine. This method of data transfer is still very popular. I frequently am asked to read information on paper tape into our Z-80 computer so that it can be transmitted over the telephone line to our campus Dec-20 computer.

CP/M is currently the most popular 8080/Z-80 operating system. Chapter Ten demonstrates how assembly language programs can utilize CP/M for all input and output by presenting three programs. One of these programs allows the user to branch to any address from the system level. Nevertheless, the use of CP/M is not the subject of this book. More information on the use of the CP/M operating system can be obtained from *Using CP/M: A Self-Teaching Guide* by Judi Fernandez and Ruth Ashley (John Wiley and Sons, Inc., 1980).

The assembly language programs in this book have all been assembled on an Altair 8800, with an Ithaca Z-80 CPU card and North Star double-density disks. The Lifeboat 2.0 version of CP/M was used as the operating system. The system monitor given in Chapter Six was additionally programmed to run on a TRS-80 Model II, using a Lifeboart 2.2 version CP/M operating system. The alternate version of the input and output routines was used in this case. The Digital Research assembler MAC was used for the 8080 instructions and the Microsoft assembler MACRO-80 was used for the Z-80 code. All of the assembly listings have been reproduced directly from the original computer printouts. The manuscript was created and edited with MicroPro's Word-Master and formatted with Organic Software's Textwriter.

Thanks to Heidi for typing the manuscript. Also, I should like to acknowledge the programmers at Microsoft, Digital Research, and Lifeboat Associates for the many things they have taught me about programming.

Alan R. Miller
June 1980

Contents

CHAPTER ONE

Introduction

There was a time when computers were gigantic machines containing racks upon racks of vacuum tubes. The invention of the transistor and the development of the integrated circuit (IC) changed all that. Today, it is possible to place tens of thousands of transistors on a single "chip" of silicon that is smaller than a quarter of an inch square. As a result of this technology. computers have become smaller and cheaper.

Computers are commonly classified into three categories, based on size and capability. The largest are known as *main frame computers*, the middle-sized ones are called *minicomputers*, and the smallest are termed *microcomputers*. A computer consists of three parts: the *central processing unit* (CPU), the *main memory*, and the *peripherals*.

The CPU directs the activities of the computer by interpreting a set of *instructions* called *operation codes*, or *op codes* for short. These instructions are located in the main memory. The memory is also used for the storage of data.

```
                              !-----------------!
                              !  main memory    !
                              !-----------------!

        !---------!     buss                 ^
        !  CPU    !  <===========>           |
        !---------!                          v
                              !-----------------!
                              !  peripherals    !
                              !-----------------!
```
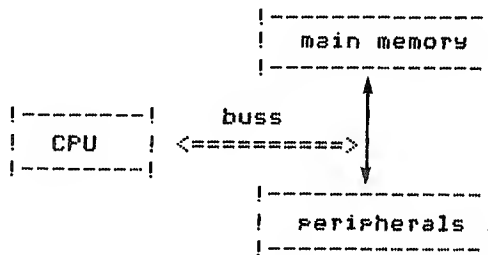
The CPU communicates with the user through such peripherals as the console, the printer, the disks, and so on. There are several electrical lines which are used to connect the CPU to the memory and to the peripherals. These lines are collectively known as the *buss*, or *bus*.

The CPU contains a set of *registers*, which are internal memory locations used for data storage and manipulation. One of these is a special register

called the *accumulator*. It receives the results of certain CPU operations. The CPU will also have a *status* register to indicate the nature of a previous operation, e.g., whether the result is zero or negative or positive. It will also indicate whether a carry or a borrow occurred during the operation.

Additional registers are used for auxiliary storage. They may contain general information such as a number that is about to be added to the accumulator. Alternately, a register may contain a number that refers to an *address* in the main memory. The value is called a *memory pointer* in this case. A special portion of main memory may be set aside for storing data. This area is called a *stack*. A special register called a *stack pointer* refers to this region. Another register, the *program counter*, tells the CPU where to find the next instruction in memory.

Computer operations are controlled by a computer *program*. Those programs which are used to solve engineering and physics problems are called *application* programs. On the other hand, computer programs which deal with the operation of the computer's own peripherals are known as *systems* programs.

The instruction set used by the CPU can be very large and difficult to use. Consequently, symbolic programming languages are commonly used instead. An application program may be written in a language such as BASIC, FORTRAN, or Pascal. This is called a *source* program. Then a separate processor program called a *compiler* or an *interpreter* is used to convert the user's source program into an *object* program that corresponds to the instructions needed by the computer.

A microcomputer's instruction set is relatively small compared to that of a larger computer. But even so, it is more convenient to write systems programs in a symbolic language called *assembly language*, rather than in the machine language of the computer. A processor program, called an *assembler*, is then utilized to translate the source program into the corresponding instructions of the computer. A major difference between assembly language and *higher-level* languages such as Pascal is that each line of an assembly language program represents one computer instruction. By contrast, one line of a Pascal source program might represent many computer instructions.

A line of an assembly language program can contain up to four elements: the *label*, the *mnemonic*, one or two *operands*, and a comment.

```
Label       Mnemonic    Operand    Comment
START:      CALL        FIRST      ;initialize data
```

The label, which is usually terminated by a colon, is used to transfer control from one portion of the source program to another. The mnemonic represents the desired CPU instruction. The operand might reference a CPU register, a memory location, or simply a constant. Finally, a comment, preceded by a semicolon, can be used to explain the instruction. The comment, of course, is ignored by the assembler.

The remainder of this chapter is devoted to a general discussion of some of the features of the 8080 and Z-80 CPUs. The complete instruction sets

for these CPUs are listed in the appendix. Specific details of each instruction are given in Appendix H. If you are already familiar with these instruction sets, then you might want to go on to the next chapter.

THE 8080 CPU

The 8080 CPU is an integrated circuit that has 40 pins (legs). It requires three power supply voltages—12 V, 5 V, and −5 V, and a two-phase clock that runs at 2 Megahertz (MHz). There is an accumulator, a flag register, six general-purpose registers, a stack pointer, and a program counter. The accumulator is sometimes known as register A. The flag register is usually called the PSW (the letters being an acronym for *program status word*). The general-purpose registers are designated by the letters B, C, D, E, H, and L. Sometimes the registers are paired into 16-bit double registers known as BC, DE, and HL. The accumulator and flag register may also be paired. There are 78 different instruction types that produce a total of 245 different op codes.

```
Accumulator     !-----------!-----------!  Flag Register
(Register A)    !  8 bits   !  8 bits   !  (PSW)
                !-----------!-----------!
Register B      !  8 bits   !  8 bits   !  Register C
                !-----------!-----------!
Register D      !  8 bits   !  8 bits   !  Register E
                !-----------!-----------!
Register H      !  8 bits   !  8 bits   !  Register L
                !-----------!-----------!
Stack Pointer   !         16 bits       !
                !-----------------------!
Program         !         16 bits       !
Counter         !-----------------------!
```

Figure 1.1. The 8080 CPU registers.

Some of the 8080 instructions explicitly refer to the accumulator or to one of the general-purpose registers (B, C, D, E, H, and L).

```
mnemonic   operand    comment
   INR       A        ;increment accumulator
   DCR       B        ;decrement register B
   MOV       H,D      ;move contents of D to H
   MVI       C,4      ;put value of 4 into C
```

When there are two operands, data moves from the right operand (the *source*) into the left operand (the *destination*). There are additional 8080 commands that implicitly refer to the accumulator.

```
mnemonic   operand     comment
   RAR                 ; rotate accumulator right
   RAL                 ; rotate accumulator left
   IN        0         ; input a byte to A from port 0
   OUT       1         ; output a byte from A to port 1
   ANI       7         ; logical AND with A and 7
   ORI       3         ; logical OR with A and 3
```

For certain 8-bit operations, the accumulator is implicitly one of the source registers and will contain the result of the operation.

```
mnemonic operand    comment
   ADD     C       ; add C to A
   SUB     D       ; subtract D from A
   ANA     H       ; logical AND of A with H
   ORA     B       ; logical OR of A and B
```

Other instructions refer to coupled pairs of 8-bit registers. These extended operations treat the BC, the DE, and the HL register pairs as 16-bit entities. Sometimes the stack pointer and program counter are included in these instructions. The X symbol in the mnemonic refers to these extended 16-bit operations.

```
mnemonic    operand     comment
   INX       H        ; increment HL register pair
   DCX       SP       ; decrement stack pointer
   LXI       D,0      ; load zero into DE pair
```

Additional instructions deal specifically with the HL register pair. The following two instructions move two bytes of data between memory and the HL double register.

```
mnemonic    operand    comment
   LHLD      3         ; addr 3, 4 to L and H
   SHLD      3         ; L,H to addr 3, 4
```

The LHLD instruction copies the value at memory location 3 into the L register and the value at location 4 into the H register. The SHLD operation reverses the process.

The XCHG operation interchanges the 16-bit HL register pair with the 16-bit DE register pair.

```
        !---------------!              !---------------!
XCHG    ! HL register   !   <===>      !  DE register  !
        !---------------!              !---------------!

        !---------------!              !---------------!
SPHL    ! HL register   !   ===>       ! stack pointer !
        !---------------!              !---------------!

        !---------------!              !---------------!
PCHL    ! HL register   !   ===>       ! program       !
        !---------------!              ! counter       !
                                       !---------------!
```

The SPHL command copies the HL register into the stack pointer register. The PCHL instruction copies the HL register pair into the program counter register.

There are several instructions that perform double-register addition. The number in one of the 16-bit registers is added to the number in HL. The sum appears in the HL register pair.

```
DAD     D       ;add DE to HL
DAD     SP      ;stack pointer + HL
```

THE MEMORY REGISTER

There is another 8-bit register for the 8080 that is not shown in Figure 1.1. It is located in main memory. The 16-bit address contained in HL defines the location of this memory register, i.e., HL is a memory pointer. The instruction

```
MOV     M,E     ;move E to memory
```

will copy the contents of register E into the memory location pointed to by the HL register pair. The instruction

```
INR     M       ;increment memory
```

will increment this byte in memory.

THE FLAG REGISTER

Four bits of the PSW register can be used to control program flow. The bits or *flags* are used in conjunction with conditional jump, conditional call, and conditional return instructions. We say that a flag is *set* if it has a value of 1 or is *reset* if it has a value of zero.

The CPU sets the sign flag (S) if the result of a previous operation is positive; the flag is reset if the result is negative. The CPU sets a second flag, the zero flag (Z), if the result is zero; it is reset if not zero. A third flag, the carry flag (C), is set if there is a carry on addition or borrow on subtraction; it is reset otherwise. A fourth flag, the parity flag (P), indicates the parity of the result. Parity is even if there is an even number of ones (or zeros) and odd otherwise.

```
!---!---!---!---!---!---!---!---!
! S ! Z !   !   !   ! P !   ! C !
!---!---!---!---!---!---!---!---!
```

Figure 1.2. The PSW (flag) register.

The use of the flag register can be demonstrated with a simple routine. Suppose that a group of instructions is to be executed eight times. The following code will do this.

```
        MVI     B,8         ;put 8 into B
LOOP:   . . .
        . . .
        DCR     B           ;decrement B
        JNZ     LOOP        ;loop if not zero
```

The B register is initialized to the value of 8. The DCR B instruction near the end of the loop decrements the B register each time the loop is executed. This will reset the zero flag on each of the first seven passes through the loop since B has not reached zero. The following conditional jump instruction, JNZ LOOP, causes the CPU to return to the line labeled LOOP in this case.

On the eighth pass through the loop the original value of 8 in the B register will have been decremented to zero. Now the zero flag will be set and the conditional jump instruction will not cause a branch. The instruction immediately following the jump will be executed instead.

FLAGS AND ARITHMETIC OPERATIONS

The results of addition and subtraction operations can be characterized from the PSW flags. Three of the flags are of interest here: the carry flag, the zero flag, and the sign flag. If the sum of two numbers exceeds 255 (1 less than 2 to the eighth power), then the result is too large to fit into the 8-bit accumulator. The carry flag will be set to reflect this overflow. During subtraction, the carry flag is set when a larger number is subtracted from a smaller one. In this case, the flag becomes an indication that borrowing has taken place.

Sometimes all eight bits of a register or memory location are used to represent a number. This is then an *unsigned* number. At other times it is convenient to utilize only the low-order seven bits (bits 0-6) for the magnitude of a number. The remaining high-order bit (bit 7) is then used to indicate the sign.

```
        magnitude                    sign      magnitude
!---------------!            !-!---------------!
!    8  bits    !            ! !    7  bits    !
! ! ! ! ! ! ! ! !            ! ! ! ! ! ! ! ! ! !
!-!-!-!-!-!-!-!-!            !-!-!-!-!-!-!-!-!-!
7 6 5 4 3 2 1 0              7 6 5 4 3 2 1 0

  unsigned number              signed number
```

Numbers represented in this way are known as *signed* numbers. A 0 in bit 7 means that the number is positive and a 1 means that the number is negative. An 8-bit signed number can range in magnitude from -128 to 127, whereas an unsigned 8-bit number can range from 0 to 255.

The sign flag is set after certain operations if the value of bit 7 is 1 and it is reset if bit 7 is 0. If the sum of two numbers is exactly 256, the result in the 8-bit accumulator will be a zero. This occurs because 256 is 1 greater than the largest 8-bit number (255). The zero flag will be set in this case. In addition, the carry flag will be set because there is an overflow. The parity

flag will be set, since there is an even number of ones. (Zero is an even number.) Finally, the sign flag will be reset because bit 7 is a zero.

FLAGS AND LOGICAL OPERATIONS

In the case of arithmetic operations such as addition and subtraction, there can be a carry or borrow from one bit to another. But the logical operations AND, OR, and XOR (exclusive OR) operate on each bit separately; there is never a carry from one bit to the next. These logical operations, therefore, always reset the carry flag. The zero and parity flags, however, will be set or reset according to the result of the particular operation. We will discuss logical operations more fully in Chapter 2.

A value in the accumulator can be compared to a value in another register or to the byte immediately following the instruction byte in memory. The CPU performs the comparison by subtracting the value of the operand from the value in the accumulator. In the case of a regular subtraction, the difference is placed in the accumulator. For example, the arithmetic instruction

```
SUB     C
```

subtracts the value in register C from the accumulator and places the difference into the accumulator. The logical comparison operation

```
CMP     C
```

also subtracts the value in register C from the value in the accumulator. However, unlike the regular subtraction operation, the difference in this case is not actually saved. The flags, of course, will reflect the result of the operation. If the value in C is equal to the value in the accumulator the difference between them will be zero. In this case the zero flag is set indicating the equality. The carry flag will be reset since there was no borrow during the subtraction.

If the two values are not equal, then A is either larger or smaller. If A is larger, the comparison operation will reset the carry flag (and, of course, the zero flag). If A is smaller, then the carry flag will be set, because a larger number has been subtracted from a smaller one. Thus, if the carry flag has been set after a comparison, then the value originally in the accumulator must have been smaller than the value with which it was compared.

The following instructions can be used to determine if the value in register C is less than, greater than, or equal to the value in the accumulator.

```
CMP     C       ; subtract A from C
JZ      ZERO    ; if A equals C
JC      LESS    ; if A less than C
. . .           ; if A greater than C
```

The comparison instruction is executed first. This operation subtracts the value of C from the value in the accumulator. If the two numbers are equal, then their difference is zero. In this case, the zero flag is set and the JZ instruction causes a branch to the label ZERO. Otherwise, the next instruction is executed. Another possibility is that the value in C is greater than the value in the accumulator. The subtraction in this case requires a borrow so the carry (borrow) flag is set. The JC instruction then causes a branch to the label LESS. The last possibility is that the value in the accumulator is larger than that in register C. For this case, both the zero and the carry flags are reset, and the program continues.

INCREMENT, DECREMENT, AND ROTATE INSTRUCTIONS

The 8-bit increment and decrement instructions present an interesting case. Mathematically, the increment operation simply adds 1 to the current value in a register. Likewise, the decrement operation subtracts 1 from the present value. Thus, the two instructions

```
INR     A     and
ADI     1
```

both increase the value in the accumulator by 1 and the operations

```
DCR     A     and
SUI     1
```

both decrease the value in the accumulator by 1. The zero, parity, and sign flags correctly reflect the result in all cases.

The carry flag, however, responds differently for the two cases. The flag correctly reflects the result of the operation in the case of addition, but it is unaffected in the case of an increment or decrement operation. Thus, if you need to increment or decrement a value without disturbing the carry flag, then you should use the INR or DCR instructions. On the other hand, if you need to know whether a carry or borrow occurred during an increment or decrement, then use an add or subtract operation.

The instructions following the label GETCH in Listing 6.1 (in Chapter 6) are used to set ASCII characters from the console input buffer. As each character is obtained, the count of the remaining characters is decremented. When the count has been decremented past 0, then the routine is finished. Subtracting 1 from 0 requires a borrow so the carry flag should be set. But since the regular decrement operation doesn't alter the carry flag, the subtract instruction must be used instead.

ROTATION OF BITS IN THE ACCUMULATOR

There are four 8080 instructions that rotate the bits in the accumulator. The operations move each bit by one position. Two instructions rotate the bits to the right and two rotate them to the left. The right circular rotation

    RRC

moves each bit one position to the right. The rightmost (low-order) bit is moved to the high-order bit and into the carry flag.

```
 !--------<--------------<------------------<-!
 !                                            !
 !     !---!---!---!---!---!---!---!---!       !---!
 !-->  !    ->  ->  ->  ->  ->  ->  ->--!----->  !
 !---!---!---!---!---!---!---!---!                !---!
              accumulator                       carry
```
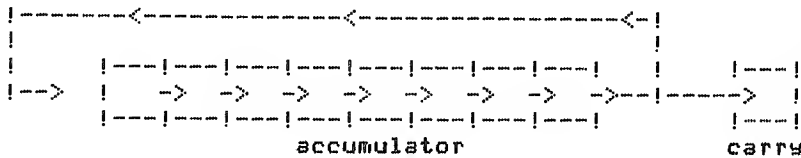
The left circular rotation

    RLC

moves the bits the other way.

```
       !->--------------->-------------------->------!
       !                                             !
 !---!     !---!---!---!---!---!---!---!---!          !
 !  <------!---<-  <-  <-  <-  <-  <-  <-  <----!
 !---!     !---!---!---!---!---!---!---!---!
 carry              accumulator
```
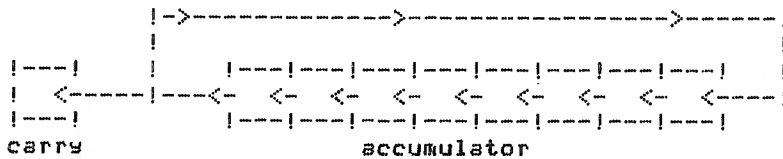
Each bit is moved one position to the left. The high-order bit goes to both the low-order bit and to the carry flag.
    The rotate accumulator right instruction

    RAR

moves each bit one position to the right. But this time, the carry flag moves into the high-order bit and the low-order bit moves into the carry flag.

```
 !--------<--------------<------------------<----------<-!
 !                                                       !
 !     !---!---!---!---!---!---!---!---!       !---!  !
 !->  !    ->  ->  ->  ->  ->  ->  ->------->  !    !-!
 !---!---!---!---!---!---!---!---!              !---!
              accumulator                       carry
```
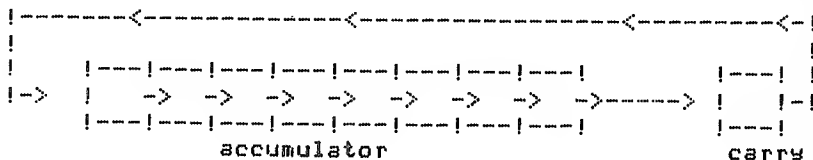
The instruction

    RAL

moves each bit one position to the left. The carry flag moves into the low-order bit and the high-order bit moves into the carry flag.

```
!->------------>-------------->------------------->-------!
!                                                         !
!   !---!           !---!---!---!---!---!---!---!---!     !
!- !   ! <-------<-  <-  <-  <-  <-  <-  <-  <-    ! <-!
   !---!           !---!---!---!---!---!---!---!---!
   carry                    accumulator
```
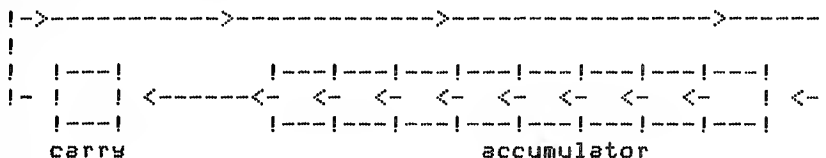
FLAGS AND DOUBLE-REGISTER OPERATIONS

Double-register, or extended, operations involving HL, DE, and BC affect the flags very differently from the single-register operations. We saw that single-register increment and decrement operations did not alter the carry flag. The extended increment and decrement commands never alter any of the flags. This means that if a program is to loop until a double register has been decremented to zero, the following set of instructions will not work.

```
LOOP:     . . .
          . . .
          DCX     H       ;16-bit decrement
          JNZ     LOOP    ;if not zero
```

The proper procedure is to compare the two 8-bit halves with each other. This can be done by moving one of the registers to the accumulator.

```
          MOV     A,L
```

Then the accumulator is compared to the other half by performing a logical OR. The result of this operation will set the zero flag only if both halves are zero. The complete operation looks like this.

```
LOOP:     . . .
          . . .
          DCX     H       ;16-bit decrement
          MOV     A,L     ;move L to A
          ORA     H       ;OR with H
          JNZ     LOOP    ;if not zero
```

The double-register add instruction correctly sets the carry flag if there is an overflow from the 16 bits, but zero, parity, and sign flags are not altered.

THE Z-80 CPU

The Z-80 CPU is a 40-pin IC just like the 8080. All of the 8080 instructions are common to the Z-80, thus we say the Z-80 is upward compatible from the 8080. In general, any program that runs on an 8080 will also run on a

Z-80. The one exception is that the 8080 parity flag is affected by arithmetic operations, while the Z-80 parity flag is not. Thus, one can use an 8080 assembler to generate 8080 code on a Z-80.

The Z-80 requires only a single 5-volt power supply and a single-phase clock that can run as fast as 6 MHz. There are 158 instruction types that give a very large number of total commands with all variations. These are given briefly in Appendixes E and F and in more detail in Appendix H. The Z-80 contains all of the 8080 general-purpose registers, plus an alternate set for easy interrupt processing. The alternate set is indicated with a prime symbol: A′, B′, and so on. Only one of the two general sets of registers can be used at any time, therefore, data cannot be transferred directly from one set to the other. There are also two 16-bit index registers called IX and IY, an 8-bit interrupt register (I), and an 8-bit refresh register (R).

```
         Primary registers             Alternate registers
         !--------!--------!            !--------!--------!
      A  ! 8 bits ! 8 bits ! PSW    A'  ! 8 bits ! 8 bits ! PSW'
         !--------!--------!            !--------!--------!
      B  ! 8 bits ! 8 bits ! C      B'  ! 8 bits ! 8 bits ! C'
         !--------!--------!            !--------!--------!
      D  ! 8 bits ! 8 bits ! E      D'  ! 8 bits ! 8 bits ! E'
         !--------!--------!            !--------!--------!
      H  ! 8 bits ! 8 bits ! L      H'  ! 8 bits ! 8 bits ! L'
         !--------!--------!            !--------!--------!
     SP  !     16 bits     !
         !-----------------!
     PC  !     16 bits     !
         !-----------------!


         Index        !------------------------!
         Register X   !        16 bits         !
                      !------------------------!
         Index        !        16 bits         !
         Register Y   !------------------------!

         Interrupt    !----------!
         Register I   !  8 bits  !
                      !----------!
         Refresh      !  8 bits  !
         Register R   !----------!
```

Figure 1.3.   The Z-80 CPU registers.

An operand for an assembly-language instruction may consist of a value that is used directly, or it may refer to a location that contains the value. For example, the command

```
   LD        A,6
```

instructs the CPU to place the value of 6 into register A. Similarly, the instruction

```
   LD        A,D
```

will move the contents of register D into register A. Alternately, the operand may be a pointer to another location. Thus the command

```
LD        A,(6)
```

will move the byte located at address 6 into the accumulator. Similarly, the instruction

```
LD        A,(HL)
```

tells the CPU to move the byte pointed to by the HL register into the accumulator. The Z-80 mnemonics clearly differentiate a pointer by means of the parentheses, whereas the corresponding 8080 mnemonics do not make such a clear distinction.

Z-80 RELATIVE JUMPS

Computer instructions are generally executed in order, one after the other. But it is sometimes necessary to branch out of the normal sequence of statements. Branching statements can be classified as either *conditional* or *unconditional.* An unconditional or absolute branch always causes the computer to execute instructions at a new location, out of the normal flow. Conditional branching, on the other hand, is based upon the condition of one of the flags.

Programs utilizing the Z-80 instruction set can be significantly shorter than those written with 8080 operation codes, especially if the relative jump instructions are used. Relative jumps are performed by branching forward or backward relative to the present position. Absolute jumps, on the other hand, are made to a specific memory location. Furthermore, there are both unconditional and conditional branch instructions. The absolute, unconditional jump op code and the conditional jump codes based on the state of the zero and parity flags are all three-byte instructions.

```
JP        ADDR1     ; unconditional jump
JP        Z,ADDR2   ; jump if zero flag set
JP        NZ,ADDR3  ; jump if zero flag reset
JP        C,ADDR4   ; jump if carry flag set
JP        NC,ADDR5  ; jump if carry flag reset
```

The above instructions are available on both the 8080 and the Z-80 CPUs. In addition, the Z-80 has a relative, unconditional jump and five relative, conditional jumps.

```
JR        ADDR      ; unconditional jump
JR        Z,ADDR6   ; zero
JR        NZ,ADDR7  ; not zero
JR        C,ADDR8   ; carry
JR        NC,ADDR9  ; not carry
DJNZ      ADDR10    ; decr, jump not zero
```

The relative jumps are only two bytes long as opposed to three bytes for the regular jumps, but the relative jump is limited to a displacement of less than 126 bytes forward or 128 bytes backward from the address of the current instruction. These numbers derive from the magnitude of the signed 8-bit displacement. Bit 7 is used for the sign of the number. A 0 in bit position 7 means a forward or positive displacement, a 1 in this bit position means a backward or negative displacement. The remaining seven bits are used for the magnitude of the jump.

Absolute jumps are specified with a 16-bit address that gives the new location. Relative jumps on the other hand are position-independent. The resulting code can be placed anywhere in memory. The last operation above, DJNZ, is a combination of two instructions. The B register is decremented. If the result is not zero, then there is a relative jump to the given argument ADDR10. This two-byte instruction requires four bytes on an 8080 CPU.

Z-80 DOUBLE-REGISTER OPERATIONS

While some of the Z-80 instructions appear to be shorter than their 8080 counterparts, they may not actually reduce the program size. Suppose, for example, that we want to move a block of data from one memory location to another. There is a single Z-80 instruction for accomplishing this task. The problem is that no verification is performed during the move. Thus, if there were no memory at the new location, or if the memory were defective, this fact would not immediately be discovered. If you want to check each location as the data are moved, then the Z-80 block-move instruction cannot be used.

A better way to move data is to define the beginning of the original memory block with HL and the end with DE. The BC register defines the beginning of the new block. We can work our way through the original block by incrementing HL and BC at each step along the way.

The end of the block can be detected when HL exceeds DE. We subtract the two 16-bit registers and observe the carry flag. The HL register pair will initially be less than the DE pair. Therefore, if we subtract DE from HL, we will set the carry (borrow) flag.

Eventually, the number in the HL register will equal the value in the DE pair. This time, the subtraction will not set the carry flag and the task will be completed. Since the 8080 doesn't have a 16-bit subtract instruction, the routine might look like this.

```
LOOP:   . . .           ; 8080 version
        . . .
        MOVE    A,L     ; GET L
        SUB     E       ; SUBTRACT E
        MOV     A,H     ; GET H
        SBB     D       ; SUBTRACT D AND BORROW
        JC      LOOP    ; IF NOT DONE
        RET             ; DONE
```

As long as HL is less than DE, the subtraction will set the carry flag and the loop will be repeated. But as soon as HL equals DE, the carry flag will be reset and the subroutine is finished.

The Z-80 has a 16-bit subtract instruction that can simplify the operation. But since the result of the subtraction is placed in the HL register pair rather than in the accumulator, the data originally present in HL will have to be saved somewhere else, say, on the stack. The Z-80 code is:

```
LOOP:   . . .           ; Z-80 version
        OR      A       ; RESET CARRY
        PUSH    HL      ; SAVE HL ON STACK
        SBC     HL,DE   ; SUBTRACT DE FROM HL
        POP     HL      ; RESTORE  ORIGINAL HL PAIR
        JR      C,LOOP  ; IF NOT DONE
        RET
```

The necessary Z-80 instructions require just as many bytes as the corresponding 8080 code. And if the carry flag on the Z-80 has not been reset by a previous instruction, it will have to be reset at the beginning with a logical OR instruction. This latter problem occurs because the Z-80 16-bit subtraction includes the carry flag in its calculations.

Z-80 INPUT AND OUTPUT (I/O) INSTRUCTIONS

A useful pair of Z-80 instructions deals with input and output, i.e., the transfer of data between the CPU and peripherals such as the console, the printer, and the disk. The 8080 can only input and output data from the accumulator, and the address of the peripheral device must immediately follow the IN or OUT instruction in memory.

```
OUT     10
IN      11
```

This usually means that for *read-only memory* (ROM), there must be separate input and output routines for each peripheral.

In contrast, the Z-80 can input or output a byte from any of the general-purpose registers when the peripheral address is in the C register. In this case, it may be possible to use a single set of I/O routines for all peripherals. This approach is discussed more fully in Chapter 4.

SHIFTING BITS

The Z-80 CPU extends the four 8080 rotate instructions to the general-purpose registers B, C, D, E, H, and L. The memory byte referenced by HL, IX, and IY is also included.

The Z-80 instruction set includes three shift operations. Shifts are similar to rotations since each bit moves one position and the bit that is

shifted out of the register is moved into the carry flag. The difference is in the bit that is shifted into the register.

The arithmetic shift left

    SLA

shifts all bits to the left. A zero bit moves into the low-order bit.

```
!---!                 !---!---!---!---!---!---!---!---!
!   ! <-------<-  <-  <-  <-  <-  <-  <-  <-   !  <-- 0
!---!                 !---!---!---!---!---!---!---!---!
carry                          accumulator
```

The operation doubles the original 8-bit value. This operation can be per-formed on the accumulator of an 8080 by using an

    ADD   A

instruction.

A logical shift right

    SRL

is the inverse of the arithmetic shift left operation. Each bit shifts one posi-tion to the right. A zero bit is shifted into the high-order position.

```
          !---!---!---!---!---!---!---!---!           !---!
0 -->     !    ->  ->  ->  ->  ->  ->  ->  ->------>  !   !
          !---!---!---!---!---!---!---!---!           !---!
               accumulator                           carry
```

This operation halves the original 8-bit value. The carry flag is set if the original value was odd, that is, if there is a remainder from the division.

The arithmetic shift right

    SRA

shifts each bit one position to the right, but the original high-order bit is unchanged.

```
          !---!---!---!---!---!---!---!---!           !---!
!-->      !    ->  ->  ->  ->  ->  ->  ->  ->------>  !   !
!         !---!---!---!---!---!---!---!---!           !---!
!              !          accumulator                carry
!_____!
!---<---!
```
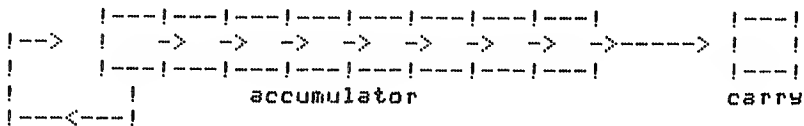
This operation can be used to divide a signed number in half. The high-order bit, the sign bit, is unchanged. As with the logical shift right, the carry flag is set if the original number was odd.

CHAPTER TWO

Number Bases
and Logical Operations

In this chapter we will consider how numbers are stored in a computer. We will also look at some of the operations that can be performed on these numbers. But first we will review the representation of numbers in general. When we write a number such as 245, we usually mean the quantity 5 plus 40 plus 200.

```
2   4   5      (decimal)
|   |   |___ 5 X   1 =   5
|   |_____ 4 X  10 =  40  (4 X the base)
|_____ 2 X 100 = 200  (2 X the base squared)
                     245  (decimal)
```

This is the ordinary decimal or base-10 representation of a number. The rightmost digit gives the number of units. The digit immediately to the left is the number of tens (the base). The next digit to the left is the number of 100s (the base squared).

In assembly language programs it is sometimes convenient to represent numbers with a base of 2, 8, or 16. In the octal, or base-8, system, for example, the number 245 is equivalent to the decimal number 165 (5 plus 32 plus 128).

```
2   4   5      (octal)
|   |   |___ 5 X  1 =   5
|   |_____ 4 X  8 =  32  (4 X the base)
|_____ 2 X 64 = 128  (2 X the base squared)
                    165  (decimal)
```

This example demonstrates how to convert numbers from other bases into the decimal representation by adding up the decimal equivalent of each digit.

In the binary, or base-2, system, only the digits 0 and 1 are used. The individual digits are called *bits*, an acronym for binary digits. The rightmost bit represents the units. The bit immediately to the left is the number of 2s (the base). The next bit to the left is the number of 4s (the base squared). We continue in this way through all of the bits. For example, the binary number

10100101

is equivalent to the decimal number 165. The conversion is obtained in the following way.

```
1   0   1   0   0   1   0   1        (binary)
                            └──── 1 ×   1 =    1
                        └──────── 0 ×   2 =    0
                    └──────────── 1 ×   4 =    4
                └──────────────── 0 ×   8 =    0
            └──────────────────── 0 ×  16 =    0
        └──────────────────────── 1 ×  32 =   32
    └──────────────────────────── 0 ×  64 =    0
└──────────────────────────────── 1 × 128 =  128
                                            ────
                                            165   (decimal)
```

We have seen that the decimal system utilizes ten different digits (0–9). The octal system, however, utilizes only eight digits (0–7), and the binary system uses only two (0–1). The hexadecimal, or base-16, system is also commonly used in computer programs. With this method, we need 16 different digits. The problem is that if we use all of the digits (0–9) from the decimal system, we will still be six digits short. The solution is to use the letters A through F to represent the digits beyond 9. Thus, the hexadecimal number A5 is equivalent to the decimal number 165. We can convert a hexadecimal number into decimal in the usual way if we remember that A stands for decimal 10, B for 11, and so on.

```
A   5        (hexadecimal)
    └──── 5 ×  1 =    5
└──────── 10 × 16 = 160   (10 times the base)
                    ────
                    165   (decimal)
```

The first 16 integers of the decimal, binary, octal, and hexadecimal systems are shown in Table 2.1.

Table 2.2.   The first 16 integers represented
in various number systems.

decimal	binary	octal	hex
0	0000	000	00
1	0001	001	01
2	0010	002	02
3	0011	003	03
4	0100	004	04
5	0101	005	05
6	0110	006	06
7	0111	007	07
8	1000	010	08
9	1001	011	09
10	1010	012	0A
11	1011	013	0B
12	1100	014	0C
13	1101	015	0D
14	1110	016	0E
15	1111	017	0F

Table 2.1 shows the common practice of displaying leading zeros on numbers expressed in bases other than 10. Thus we write 5 for a decimal number, but we may write 005 if it is an octal number or 05 if it is a hexadecimal number. We may explicitly represent the base by a suffix. In books, for example, we typically utilize a subscript in smaller size type. Thus we will write:

$$1010_2 \qquad \text{(binary)}$$
$$17_8 \qquad \text{(octal)}$$
$$17_{10} \qquad \text{(decimal)}$$
$$17_{16} \qquad \text{(hexadecimal)}$$

Alternately, we use suffixes of B, Q, D, and H to designate, respectively, binary, octal, decimal, or hexadecimal mode in computer programs where subscripts are not available.

    1010B   (binary)
    17Q   (octal)
    17D   (decimal)
    17H   (hexadecimal)

(The letter Q is used instead of an O for an octal number to avoid confusion with zero.)

Binary numbers such as

    011001101111

can be difficult to read, so it is common practice to represent them in octal or hexadecimal form. Conversion to octal is easy if the bits are grouped by threes.

011	001	101	111	(binary)
3	1	5	7	(octal)

Grouping by fours facilitates the conversion to hexadecimal.

0110	0110	1111	(binary)
6	6	F	(hexadecimal)

NUMBER REPRESENTATION IN BINARY, BCD, AND ASCII

All information is ultimately stored in computers as a series of binary digits. There are, however, several different coding schemes for representing the original data. The simplest method is to use straight binary coding, as shown in Table 2.1. Notice that we might choose to represent a binary value in decimal, octal, or hexadecimal notation. The number itself is unchanged by this. The decimal number 12, for example, is stored as the binary number 1100.

A different method of representing data is called *binary coded decimal* (BCD). Actually, there are two types of BCD: unpacked and packed. With unpacked BCD, each byte contains a single decimal digit from 0 to 9. Packed BCD can have one or two decimal digits in each byte. Thus, a packed BCD number can range from 0 to 99. By comparison, an 8-bit binary number can range from 0 to 255. Table 2.2 shows the first 16 integers in BCD. The first column gives the decimal equivalent, the second column the corresponding bit pattern.

Table 2.2.   The first 16 integers represented in
decimal and binary-coded decimal (BCD).

decimal	BCD
0	0000 0000
1	0000 0001
2	0000 0010
3	0000 0011
4	0000 0100
5	0000 0101
6	0000 0110
7	0000 0111
8	0000 1000
9	0000 1001
10	0001 0000
11	0001 0001
12	0001 0010
13	0001 0011
14	0001 0100
15	0001 0101

Notice that the binary representation for the decimal numbers 0 through 9 is the same for both binary and for BCD.

A third method for encoding data is called ASCII. This scheme is commonly used with peripherals such as printers and video terminals. When the key labeled 2 of an ASCII console is pressed, the bit pattern

0011   0010

is generated. Table 2.3 gives the bit patterns for the ASCII digits 0–9 in binary and hexadecimal notation.

Table 2.3. The bit pattern for the ASCII digits 0–9.

digit	binary	hexadecimal
0	0011 0000	30
1	0011 0001	31
2	0011 0010	32
3	0011 0011	33
4	0011 0100	34
5	0011 0101	35
6	0011 0110	36
7	0011 0111	37
8	0011 1000	38
9	0011 1001	39

LOGICAL OPERATIONS

The fundamental operations of a computer involve electrical signals that can have only one of two values. The two voltage levels might be zero and 5 volts, for example, or they might be something else. The actual value is unimportant at this point. Instead, we refer to the two allowable states as TRUE and FALSE. The TRUE state is also called a logical 1, or high state, and the FALSE state is also known as a logical 0, or low state.

TRUE = 1   (high)
FALSE = 0   (low)

Computers store numbers in binary form as a series of 1s and 0s. These two possible values correspond to the two possible voltage levels of the electronic circuitry. We can therefore utilize the expressions TRUE and FALSE to describe the state of each bit.

The collection of transistors, resistors, and so forth that makes up the physical computer is called the *hardware*. The computer program used to direct the activities of the computer is termed the *software*. In this sense, the hardware and software are distinctly different. But sometimes we use these terms a little differently.

Consider, for example, one of the major differences between minicomputers and microcomputers. Minicomputers contain electronic circuitry for the multiplication of two numbers. Since microcomputers do not contain such circuitry, multiplication is performed instead by executing a special computer program. We say that minicomputers perform multiplication by hardware, but that microcomputers must do multiplication by software.

Hardware operations are performed by electronic devices called *gates.* The internal structure of the gate is unimportant if we are only interested in the logic of its operation. There are input signal lines that are sampled by the gate, and there is an output signal that is generated by the gate. When we consider the logical operations that are performed by a computer, we can imagine that they are accomplished either by hardware or by software. The answer is the same.

A common logical operation is the complement or inversion of a binary digit. The complement of 0 is 1 and the complement of 1 is 0. The hardware complement is performed with an inverter or NOT gate. The electronic symbol for this gate, shown in Figure 2.1, is a triangle with one apex to the right (usually) or to the left (sometimes). A small circle or triangle at this apex completes the symbol.

Figure 2.1.   The electronic symbol for the NOT or inverter gate.

Letters of the alphabet are used to designate input or output signals. These binary signals can have one of two states, termed TRUE (1) or FALSE (0). The letter A with a bar over it ($\overline{A}$) represents the complement of A and is called NOT A. A truth table is used to summarize the possible states.

A	$\overline{A}$	or	A	$\overline{A}$
0	1		FALSE	TRUE
1	0		TRUE	FALSE

THE TWO'S COMPLEMENT

If each bit of an 8-bit byte is complemented, we produce a result that is termed the one's complement of the byte.

```
0000 1001 = 9
1111 0110 = one's complement of 9
```

Both the 8080 and the Z-80 CPUs provide an operation code for complementing the accumulator. A slightly different operation is the two's complement. It is obtained by incrementing (adding 1 to) the one's complement of a number. For example:

```
  0000 1001  =  9

  1111 0110  =  one's complement of 9
+ 0000 0001     add one
  ─────────
  1111 0111  =  two's complement of 9
```

It is interesting to note that the sum of a number and its two's complement is zero.

```
  1010 1010  =  170

  0101 0101  =  one's complement of 170
+ 0000 0001     add one
  ─────────
  0101 0110  =  two's complement of 170

  0101 0110  =  two's complement of 170
+ 1010 1010  =  170
  ─────────
  0000 0000     sum
```

Adding the two's complement of a number produces the same result as subtracting the number itself. For example, we can subtract 170 from 223 by adding the two's complement of 170. The result is the same.

```
  1101 1111  =  223
− 1010 1010  =  170
  ─────────
  0011 0101  =  53
```

or

```
  1101 1111  =  223
+ 0101 0110  =  2's complement of 170
  ─────────
  0011 0101  =  53
```

The 8080 CPU can perform both addition and subtraction with 8-bit numbers and it can add 16-bit numbers, but there is no 16-bit subtraction operation. We can effectively perform a 16-bit subtraction, however, by adding the two's complement. Suppose that the HL register pair contains the decimal value 10,005 and we want to subtract 10,000 from it. The difference between 10,005 and 10,000 can be obtained by adding the two's complement. Consider the bit pattern for the number 10,000.

```
0010 0111 0001 0000 = 10,000
```

We first form the one's complement, then increment the result to form the two's complement.

```
   1101 1000 1110 1111  =  one's complement of 10,000
+  0000 0000 0000 0001     add one
   ─────────────────────
   1101 1000 1111 0000  =  two's complement of 10,000
```

Finally, we add this two's complement to the value in HL.

```
   0010 0111 0001 0101  =  10,005 in HL
+  1101 1000 1111 0000  =  two's complement of 10,000
   ─────────────────────
   0000 0000 0000 0101     difference (sum) is 5
```

When an assembler encounters a negative argument, it will automatically calculate the corresponding two's complement. Thus the 8080 expression

```
LXI  =  D,-10000
```

will place the bit pattern

```
1101 1000 1111 0000
```

in the DE register pair. The instruction

```
DAD     D
```

will then effectively perform a 16-bit subtraction on the number in HL.

LOGICAL OR AND LOGICAL AND

In the previous section, we considered the logical operation of NOT. Two other important logical operations are OR and AND. Both of these operations reflect the usual English meaning. The logical OR of two bits results in a value of TRUE (1) if either or both the original values are TRUE. The result is FALSE otherwise. The logical AND of two values gives an answer of TRUE (1) if and only if both of the original values are TRUE. If either or both the original values are FALSE, then the answer is FALSE.

Equations of logical operations can be written using the appropriate symbols. Two OR operators are in common use: a plus symbol and a V-shaped symbol. The AND operator is either a dot or an inverted V. The schematic representations of the OR and AND gates are shown with their corresponding mathematical representations in Figure 2.2.

Figure 2.2.   The OR and the AND gates.

The truth table is

		(OR)	(AND)
A	B	A+B	A·B
0	0	0	0
0	1	1	0
1	0	1	0
1	1	1	1

where zero means FALSE and 1 means TRUE. The origin of the + symbol for the OR operation and · symbol for the AND operation can be seen from the truth table. Logical operations are performed separately on each bit, and there is never a carry. The logical OR (sum) of A and B gives zero if both bits are zero, but 1 otherwise. (Binary digits can't be larger than 1.) The logical AND (product) of A and B gives zero if either or both bits are zero and unity otherwise.

SETTING A BIT WITH LOGICAL OR

Sometimes, we need to set one or more bits of the accumulator. We can use the logical OR operation for this purpose. From the truth table in the previous section, we can see that a logical OR of 1 with either a 0 or a 1 will give a result of 1.

A	B	A+B
1	0	1
1	1	1

Thus, a logical OR of any bit with a 1 will set that bit. On the other hand, a logical OR of 0 and another bit gives the result of that other bit.

A	B	A+B
0	0	0
0	1	1

In this case, the second bit is not changed.

Suppose that the accumulator contains a binary 5 and we want to convert it to an ASCII 5.

```
0000 0101 = binary 5
0011 0101 = ASCII 5
```

If we compare the two bit patterns, we can see that they are the same except for bits 4 and 5. These bits can be set by executing a logical OR with an ASCII zero.

```
        0000  0101  =  binary 5
   OR   0011  0000  =  ASCII zero
        ─────────────
        0011  0101  =  ASCII 5
```

The OR operation has set the bit corresponding to the location of the 1, but it has left the other bits unchanged.

A logical OR of a register with itself does not change the value.

```
        0101  1010  =  5A hex
   OR   0101  1010  =  5A hex
        ─────────────
        0101  1010  =  5A hex
```

But this operation can be used to set the flags. In this example, the zero, carry, and sign flags are reset and the parity flag is set.

RESETTING A BIT WITH LOGICAL AND

A logical AND operation can be used to reset any particular bit of the accumulator; the truth table shows how. A logical AND of 0 and either a 0 or a 1 will always give a result of 0.

A	B	A·B
0	0	0
0	1	0

Thus, the bit is reset. On the other hand, a logical AND of 1 and another bit will give the value of the other bit.

A	B	A·B
1	0	0
1	1	1

Thus the AND instruction can be used to reset or "turn off" particular bits. This step is sometimes called a *masking* AND operation.

When the CPU reads an ASCII character from the console, it gets an 8-bit byte. But since the ASCII code contains only 7 bits, the high-order bit is not needed. The console-input routine typically resets this bit by performing a masking AND operation. Suppose that the console transmitted an ASCII 5 with the high-order bit set. The bit pattern looks like this.

```
1011  0101
```

The high-order bit can be reset with an AND operation.

```
        1011 0101  (original byte)
  AND   0111 1111  (mask)
        ─────────
        0011 0101  (ASCII 5)
```

LOGICAL EXCLUSIVE OR

The ordinary OR operation is sometimes called an inclusive-or operation to distinguish it from the exclusive OR (XOR) operation. For this latter operation, the result is TRUE only if the corresponding bits of both values are different. Either A or B must be TRUE, but not both. The XOR operation is represented by a plus symbol surrounded by a circle. The complement of the XOR is the exclusive NOR or XNOR. It can be used as a comparator. The hardware implementation is sometimes used in circuitry to enable memory boards. The result is TRUE if and only if both corresponding bits are identical. The result is FALSE otherwise. The truth table is:

A	B	$A \oplus B$	$\overline{A \oplus B}$
0	0	0	1
0	1	1	0
1	0	1	0
1	1	0	1

The exclusive OR of a bit with itself will always be FALSE. Therefore the XOR of the accumulator with itself will set it to zero.

```
        0111 1100  = 7C hex
  XOR   0111 1100  = 7C hex
        ─────────
        0000 0000  = zero
```

The corresponding electronic symbols for the hardware implementation of the XOR and XNOR are shown in Figure 2.3.

Figure 2.3.   The exclusive or (XOR) and comparator (XNOR) gates.

LOGICAL NAND AND NOR GATES

By combining an inverter gate in series with the AND and OR gates, a new set of gates is formed. The NOT AND gate is called a NAND gate; it is shown

in Figure 2.4. The NOT OR gate is known as a NOR gate; it is shown in Figure 2.5.

A
B $\quad\searrow\!\!\!\!\!\!\!\!\!\searrow\!\!\!\!\!\!\triangleright\!\!\circ$ $X = \overline{A \cdot B}$ A
B $\quad\searrow\!\!\!\!\!\!\!\!\!\searrow\!\!\circ$ $X = \overline{A \cdot B}$

Figure 2.4.   The NAND gate can be produced from an AND gate and a NOT gate.

A
B $\quad\searrow\!\!\!\!\!\!\!\!\!\supset\!\!\!\!\!\!\triangleright\!\!\circ$ $X = \overline{A + B}$ A
B $\quad\searrow\!\!\!\!\!\!\!\!\!\supset\!\!\circ$ $X = \overline{A + B}$

Figure 2.5.   The NOR gate can be formed from the OR gate and the NOT gate.

From the truth table, it can be seen that the outputs of the NOR and NAND gates are the inverse of the corresponding OR and AND gates.

A	B	$\overline{A+B}$	$\overline{A \cdot B}$
0	0	1	1
0	1	0	1
1	0	0	1
1	1	0	0

If both inputs of the NOR gate are connected together, then the gate behaves like a NOT gate. The same is true for the NAND gate. This can be seen by comparing the first and last rows of the truth tables. In this way, two NOR gates can be combined serially to produce an OR gate. The result is a NOT NOT OR gate that is equivalent to an OR gate. This is shown in Figure 2.6. In a similar way, two NAND gates can be used to make an AND gate as shown in Figure 2.7. Since OR and AND gates cannot be similarly combined to produce the NOR and NAND gates, we will find that NAND and NOR gates are more common.

A
B $\quad\supset\!\!\circ$ $\overline{A + B}$ $\quad\supset\!\!\circ$ $X = \overline{\overline{A + B}} = A + B$

Figure 2.6.   An OR gate is formed from two NOR gates.

A
B $\quad\supset\!\!\circ$ $\overline{A \cdot B}$ $\quad\supset\!\!\circ$ $X = \overline{\overline{A \cdot B}} = A \cdot B$

Figure 2.7.   Two NAND gates are combined to produce an AND gate.

MAKING OTHER GATES

NOR and NAND gates are very versatile. NOR gates or NAND gates can be combined to produce all of the other gates. This can be seen from the following truth table.

A	B	$\overline{A}$	$\overline{B}$	A+B	A·B	$\overline{A+B}$	$\overline{A}·\overline{B}$	$\overline{A}+\overline{B}$	$\overline{A·B}$
0	0	1	1	0	0	1	1	1	1
0	1	1	0	1	0	1	0	0	1
1	0	0	1	1	0	1	0	0	1
1	1	0	0	1	1	0	0	0	0

Notice that column 7 of the truth table has the same values as the last column. Similarly, columns 8 and 9 are identical. These relations follow De Morgan's theorem, which can be expressed mathematically as:

$$\overline{A} + \overline{B} = \overline{A \cdot B} \quad \text{and}$$
$$\overline{A} \cdot \overline{B} = \overline{A + B}$$

The corresponding digital gates are shown in Figures 2.8 and 2.9.
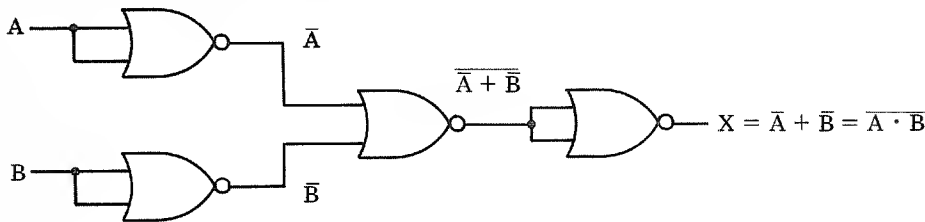
Figure 2.8.   A NAND gate is formed from four NOR gates.
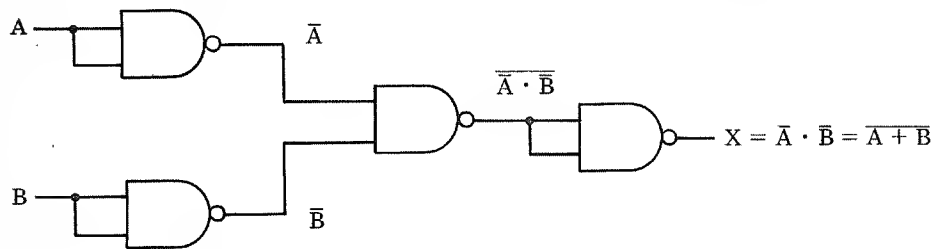
Figure 2.9.   A NOR gate is obtained from four NAND gates.

The use of a small circle to represent inverted output brings up another approach to the understanding of digital logic gates. In the more commonly used system, the small circles are used only on the output side of the gate.

Another approach, however, is to always connect active-high outputs to active-high inputs, and active-low outputs to active-low inputs. For this latter system, NAND gates will sometimes appear as OR gates with inverted inputs, and NOR gates will sometimes appear as AND gates with inverted

inputs. According to De Morgan's theorem, the NAND gate is equivalent to the OR gate with inverted input signals. This is demonstrated in Figure 2.10. The circuit shown is logically the same as the one shown in Figure 2.9. Notice that the active-low outputs of the first NAND gates are connected to the active-low inputs of the next OR gate. That is, there are small circles on the outputs of the first gates and on the inputs of the second gate.
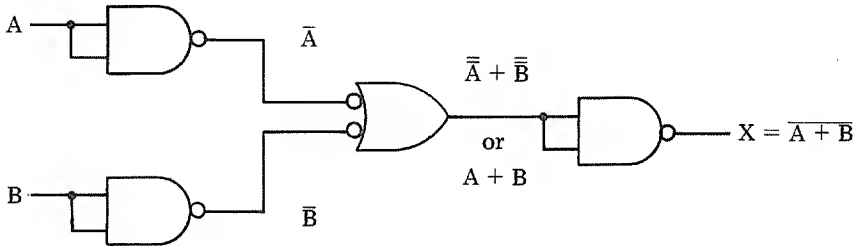
Figure 2.10.   A NOR gate is produced from four NAND gates. The middle NAND gate is shown in its alternate representation.

CHAPTER THREE
The Stack

When main memory is used to store a collection of data, each member of the data set is individually accessible. This type of storage is termed *random access memory* (RAM). Magnetic tape storage, by contrast, is serial or *sequential access memory*. In this latter case, only one item of the set is available at any one time. There are two ways of storing and retrieving the items in a serial memory buffer: one is by means of a first-in, first-out (FIFO) buffer, and the other is by means of a last-in, first-out (LIFO) buffer. We can visualize the serial buffer as a long string of information. With the FIFO buffer, items are added at one end and removed from the other. This buffer is analogous to an escalator: the people who ride the escalator are like the data—those who get on first, get off first.

```
            In
            |
            ↓
 !-----------!
 !   data    !
 !-----------!
 !   data    !
 !-----------!
 !   data    !
 !-----------!
 !   data    !
 !-----------!
            |
            ↓
           Out
```
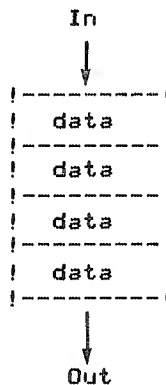
Figure 3.1. The first-in, first-out (FIFO) buffer.

With the LIFO buffer, on the other hand, the data are added and removed at the same place. This arrangement is analogous to a very long, narrow elevator. Those who get on first, have to wait until everyone else is

off before they can get off. It can be seen that magnetic tape is a FIFO medium.

```
!----------!
!   data   !
!----------!
!   data   !
!----------!
!   data   !
!----------!
!   data   !
!----------!
     ↑      ↓
    In     Out
```

Figure 3.2.   The last-in, first-out (LIFO) buffer.

Sometimes, a special area of main memory is designated as a LIFO buffer even though each member of the buffer is individually accessible. This region is known as a *stack*. As an example, Hewlett-Packard calculators utilize a very short LIFO stack, consisting of registers known by the letters Y, Z, and T. An item in any of the registers is individually accessible, yet the stack as a whole can be manipulated. As data is entered from the keyboard, it is placed into the X register. This information can then be transferred to the stack (register Y in this case) by pressing the ENTER key. We say that the contents of the X register are *pushed* onto the stack. Items can be retrieved from the stack and placed in the X register with the roll-down (R) key. We say that data are *popped* from the stack into the X register by this means. Another stack operation is performed by the EXCHANGE key which is used to swap the contents of the X and Y registers.

STORING DATA ON THE STACK

We have seen in the previous chapters that the 8080 and Z-80 microprocessors incorporate general-purpose registers for the storage of information. But these registers are limited in number. Consequently, a special area of main memory is designated for the additional storage of information. This area, called the stack, is implemented on the Z-80 and 8080 as a last-in, first-out serial buffer even though each item in the stack is individually accessible. One of the CPU registers, the stack pointer, references the current location in memory. This is the address of the most recently added item. The stack pointer is decremented as items are added and incremented as items are removed. The programmer may place the stack anywhere in memory by loading the stack pointer with the desired address. For example, the instruction

```
LD      SP,4000H      (Z-80)   or
LXI     SP,4000H      (8080)
```

initializes the stack to location 4000 hex.

Data can be placed on the stack with one of the PUSH operations. A command of

```
(Z-80)            (8080)
PUSH    HL        PUSH    H
```

will move a copy of HL to the stack. Since main memory is addressed eight bits at a time, the PUSH operation is actually performed in two stages. The stack pointer is decremented, then the H register (the high half) is copied to the stack. The stack pointer is decremented a second time and the L register (the low half) is copied to the stack. The stack pointer register now contains the address of the low byte. Figure 3.3 demonstrates the action of a PUSH HL command. The region of memory devoted to the stack is shown with higher memory upward. The arrow represents the stack pointer.
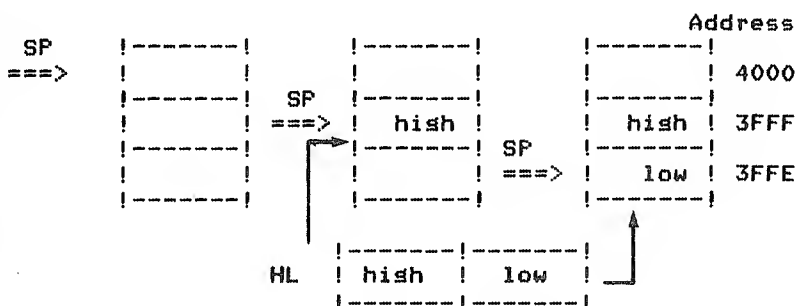
Figure 3.3. The HL register is pushed onto the stack.

The POP instruction reverses the PUSH process. For example, a POP DE command copies 16 bits from the stack into the DE register. Because the stack operates in a LIFO manner, the most recently added byte is removed first. This is placed into register E (the low half of the DE pair). The stack pointer is automatically incremented and the next byte is transferred from memory to register D (the high half). The stack pointer is then incremented a second time. Figure 3.4 demonstrates the operation. Notice that the data originally pushed onto the stack is still present.
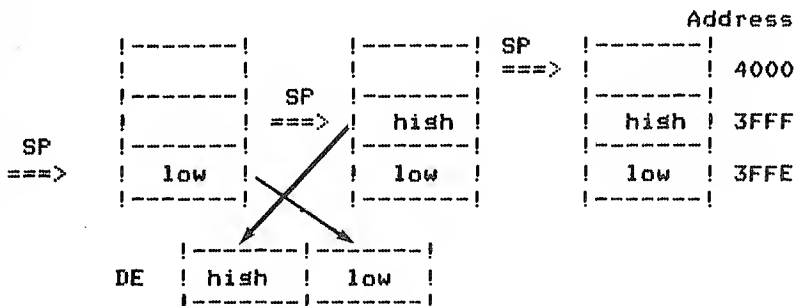
Figure 3.4. Two bytes are popped from the stack into DE.

It can be seen that the stack grows downward in memory as data are pushed into it, and it moves back up as data are popped off. For this reason, it is common practice to initialize the stack pointer to the top of usable memory. Actually, the stack pointer can start at one address above the top of memory since the stack pointer is always decremented before use.

If the general-purpose registers contain important information but they are needed for a calculation, it will be necessary to save the original data. This can be easily done by pushing the contents onto the stack. The registers are restored at the end of the calculation with the three corresponding POP commands. The operation goes like this.

```
PUSH    HL        ;save HL
PUSH    DE        ;save DE
PUSH    BC        ;save BC
  . . .
  . . .           ;do the calculation
  . . .
POP     BC        ;restore BC
POP     DE        ;restore DE
POP     HL        ;restore HL
```

Notice that the order of the POP commands is reversed from that of the PUSH sequence. This is necessary because of the stack's LIFO operation.
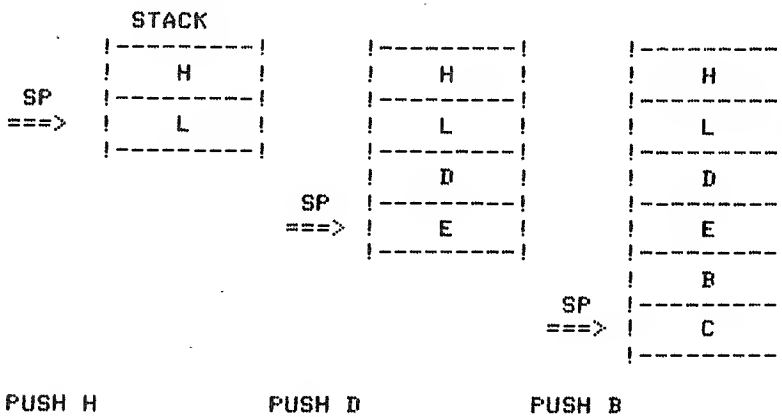
Figure 3.5. The contents of the general-purpose registers are saved on the stack.

```
STACK
          !---------!            !---------!   SP   !---------!
          !         !            !         !  ===>  !         !
          !---------!            !---------!        !---------!
          !    H    !       SP   !    H    !        !    H    !
          !---------!      ===>  !---------!        !---------!
          !    L    !  ===>  !   !    L    !        !    L    !
          !---------!            !---------!        !---------!
          !    D    !            !    D    !        !    D    !
    SP    !---------!            !---------!        !---------!
   ===>   !    E    !            !    E    !        !    E    !
          !---------!            !---------!        !---------!
          !    B    !            !    B    !        !    B    !
          !---------!            !---------!        !---------!
          !    C    !            !    C    !        !    C    !
          !---------!            !---------!        !---------!

    POP  B               POP  D               POP  H
```
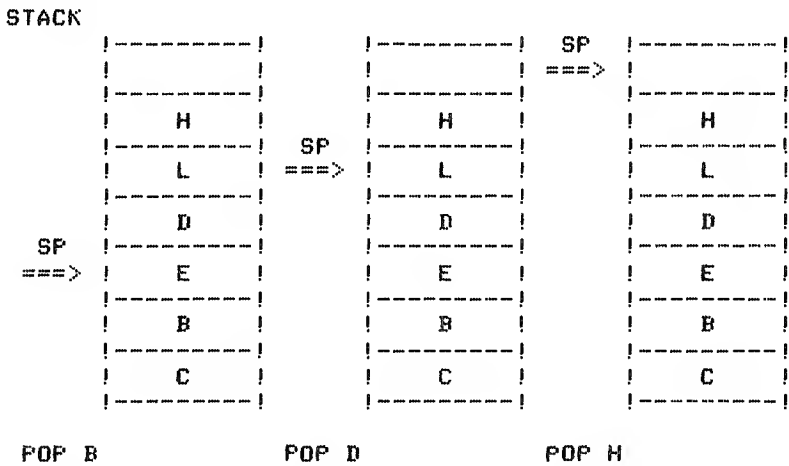
Figure 3.6. The original contents of the general-purpose registers are restored from the stack.

THE ACCUMULATOR AND PSW AS A DOUBLE REGISTER

The 8-bit accumulator and the 8-bit flag register are treated as a 16-bit double register for the PUSH AF and POP AF instructions. In this case, the accumulator is treated like the high byte since it is pushed onto the stack first. The flag register is pushed onto the stack second. Figure 3.7 demonstrates this.

```
                 stack            stack
          SP   !--------!      !--------!
         ===>  !        !      !        !
               !--------!      !--------!
               !        !      !   A    !  <-!
               !--------!  SP  !--------!     !
               !        ! ===> ! flags  !     !
               !--------!  !->  !--------!     !
                           !                   !
                           !    !--------!     !
                           !    !   A    !  >-!
                           !    !--------!
                           !-<  ! flags  !
                                !--------!

          PUSH  PSW            POP  PSW
```
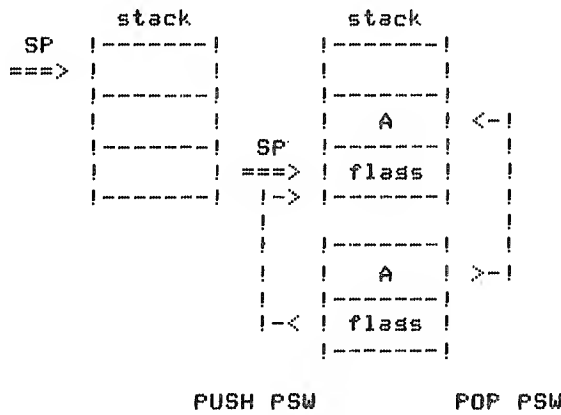
Figure 3.7. Contents of the accumulator and flag registers are pushed onto the stack.

Data can be moved from one register pair to another by using a PUSH/POP combination. For example, the two 8080 commands

```
PUSH   H
POP    D
```

will move H to D and L to E. This is not the most efficient way to accomplish the move, however. The sequence requires access to main memory and so is slower than the direct register moves

```
MOV    D,H
MOV    E,L
```

Z-80 INDEX REGISTERS

The Z-80 has two, 16-bit index registers that can participate in the PUSH and POP operations. However, the instructions each require two bytes compared to the other PUSH and POP instructions which only require one byte each. As a result, the execution time is slower than the other PUSH and POP instructions. There are no official instructions for moving data between the index registers and the general-purpose registers. This transfer can be performed, however, by use of the PUSH and POP commands. The two instructions

```
PUSH   IX
POP    BC
```

will copy the IX register into the BC register.

SUBROUTINE CALLS

We have seen that the PUSH instructions can be used by the programmer to store data on the stack. The 8080 and Z-80 CPUs use the stack for a second purpose: storing the return address when a subroutine is called. Subroutines are used to efficiently code a set of instructions needed at several different places in a computer program. A subroutine is called by using the assembly-language mnemonic CALL. At the end of the subroutine, indicated by the return statement, control is automatically returned to the calling program.

```
!---------!   Call       !------------!
! calling ! --------->   ! subroutine !
! program ! <---------   !------------!
!---------!   Return
```

The input and output routines which control the console may be needed at several locations in a program. Consequently, they are coded as

subroutines. The 8080 assembly language subroutine for the console might look like this.

```
OUTPUT: IN      STATUS  ; CHECK STATUS
        ANI     INMSK   ; INPUT MASK
        JZ      OUTPUT  ; NOT READY
        MOV     A,B     ; GET DATA
        OUT     DATA    ; SEND DATA
        RET             ; DONE
```

Data can be output from anywhere in a program by placing the byte in the B register and calling the output subroutine. The following examples of 8080 assembly language mnemonics show how a question mark and a colon can be printed by calling the console output routine.

```
WHAT:   MVI     B,'?'   ;OUTPUT A ?
        CALL    OUTPUT
   . . .
               . . .
COLON:  MVI     B,':'   ;OUTPUT A COLON
        CALL    OUTPUT
           . . .
```

The above examples utilize the unconditional subroutine call and unconditional return instructions. Conditional call and return instructions are also available. These commands perform the appropriate call or return only if the referenced PSW flag is in the desired state. The four flags—zero, sign, carry, and parity—give rise to eight conditions.

zero
not zero
plus
minus
carry
not carry
parity even
parity odd

These instructions are discussed in more detail in Appendix H.

The stack provides the mechanism for subroutine operation. When a CALL instruction is encountered, the address immediately following the CALL statement is automatically pushed onto the stack. The subroutine address is then loaded into the program counter register. The program counter tells the CPU which instruction to execute next. Since a subroutine CALL uses the stack, the programmer must be sure that the stack is properly defined prior to a subroutine CALL. When a return instruction is subsequently encountered, the return address is popped off the stack and placed into the program counter. After return from a subroutine, program execution continues with the instruction following the CALL statement.

PASSING DATA IMPROPERLY TO A SUBROUTINE

Since the stack can be used for storing both data and subroutine return addresses, the programmer must ensure that there are no conflicts. First, there should normally be as many POP instructions as PUSH instructions. Second, one must be careful not to PUSH data onto the stack, CALL a subroutine, then POP data off the stack. The LIFO nature of the stack will cause trouble in this case.

```
          PUSH     H
          CALL     ORDER >---!
          . . .              !
          . . .              !
ORDER:    . . .          <---!
          POP      H
          . . .
          RET      >----> ???? CRASH !
```
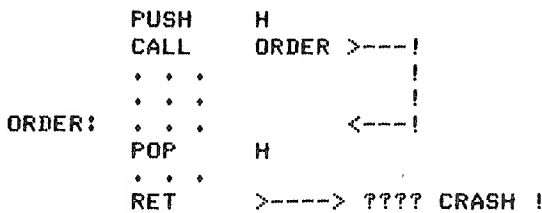
Figure 3.8 shows an example of improper mixing of data and the return address on the stack. Higher memory is upward and lower memory is downward. The arrow indicates the current stack pointer position.

```
            STACK
SP     !---------!         !---------!   SP  !---------!
===>   ! data    !         ! data    !  ===> ! data    !
       !---------!   SP    !---------!        !---------!
                    ===>   ! address !
                           !---------!
                           !                 !---------!
                           !---> H,L  ! address !
                                             !---------!

PUSH H          CALL ORDER          POP H              RET
```
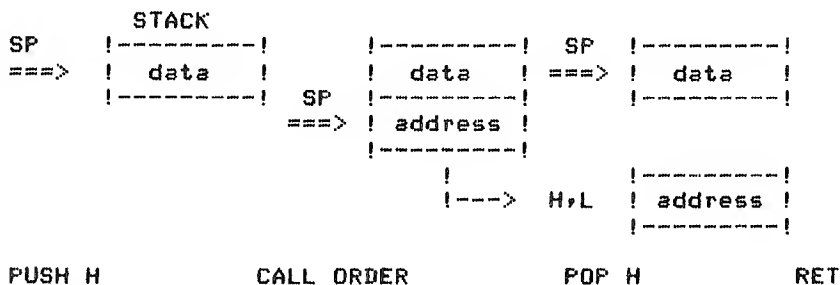
Figure 3.8.   Improper mixing of data and the return address on the stack.

In this example, the data is first pushed onto the stack while in the main program. The return address is then pushed onto the stack next, when the CALL instruction is encountered. The POP instruction in the subroutine will actually load the HL register pair with the subroutine return address rather than the data that was expected. This occurs because the data was pushed onto the stack before the return address. Worse yet, the RET instruction will load the program counter with the data, rather than with a useful address. Strange things are likely to happen when the CPU attempts to execute instructions at an address defined by the data.

PASSING DATA PROPERLY TO A SUBROUTINE

This section demonstrates a proper way to pass data into a subroutine by using the stack. The task can be accomplished with the 8080 XTHL instruction

or the Z-80 EX (SP),HL instruction. This operation exchanges the HL register pair with the two bytes at the current stack position. The instruction is analogous to the X/Y EXCHANGE key on an HP calculator.

The method works in the following way. The data is pushed onto the stack while control is in the calling program. When the subroutine is called, the return address is pushed onto the stack, just after the data. A POP instruction, executed in the subroutine, delivers the return address to the HL register. Now, the XTHL instruction exchanges the HL register with the stack. The desired data is now in HL and the return address is on the stack. Finally, a return instruction will correctly return control to the calling program.

```
        PUSH    H         ; main program
        CALL    ORDER     ; call subroutine
        . . .
        . . .
ORDER:  . . .             ; start of subroutine
        POP     H         ; get return address
        XTHL              ; exchange with data
        . . .
        RET               ; return to main program
```

```
STACK !---------!  SP  !---------!  SP  !---------!
      !  data   !  ===>  !  data   !  ===>  ! address !
 SP   !---------!        !---------!        !---------!
 ===> ! address !
      !---------!

                        !---------!        !---------!
                HL      ! address !        !  data   !
                        !---------!        !---------!

CALL                POP H              XTHL            RET
```

Figure 3.9.   Proper mixing of data and return address on the stack.

It is important to note that the XTHL command only works with the HL register. There is no equivalent instruction for the DE or BC registers.

PASSING DATA BACK FROM A SUBROUTINE

A variation of the XTHL technique is also possible. Data can be pushed onto the stack from within a subroutine, then retrieved after returning to the calling program.

```
        CALL    FETCH
        POP     H        ;GET THE DATA
        . . .
        . . .
FETCH:  . . .
        LXI     H,DATA   ;PUT IN H,L
        XTHL             ;SWITCH STACK
        PUSH    H        ;RET ADDR
        . . .
        RET
```

DATA in this case is predefined and is part of the LXI instruction.
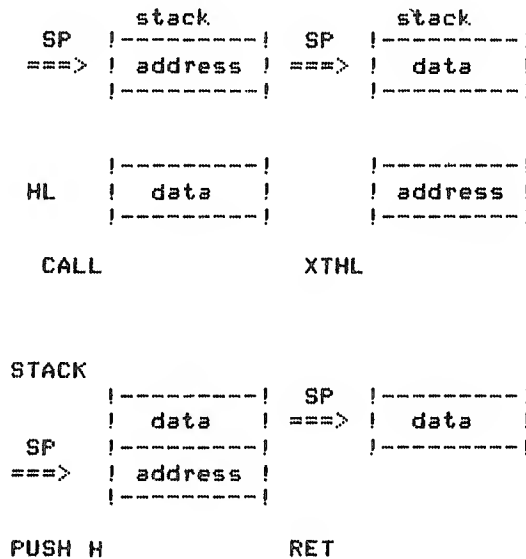
Figure 3.10.   Using the stack to pass data back from a subroutine.

An extension of the XTHL technique allows additional data to be passed on the stack.

```
          CALL    FETCH
          POP     B       ;DATA 3
          POP     D       ;DATA 2
          POP     H       ;DATA 1
          . . .
          . . .
FETCH:    . . .
          LHLD    DATA1   ;DATA1 TO H,L
          XTHL            ;SWITCH STACK
          XCHG            ;STACK TO DE
          LHLD    DATA2   ;GET DATA2
          PUSH    H       ;PUT ON STACK
          LHLD    DATA3   ;GET DATA3
          PUSH    H       ;PUT ON STACK
          PUSH    D       ;RET ADDR TO STACK
          RET
```

In this example, the return address is first moved to the HL pair with the XTHL command. Then it is moved to the DE register pair with the XCHG instruction. Three sets of 16-bit data are obtained from the memory addresses pointed to by the arguments of the LHLD instructions DATA1, DATA2, and DATA3. The first set is placed on the stack with the XTHL command. Then the other two are pushed onto the stack. Next, the return address, previously saved in the DE register pair, is pushed onto the stack. A final RET instruction pops the return address from the stack into the program counter.

SETTING UP A NEW STACK

Sometimes it is desirable to save the current stack pointer and set up a new one. When this happens, the original stack pointer is restored at the conclusion of the task. The technique is particularly useful when one independent program is executed by another. The original stack pointer is saved in a memory location, then retrieved at the end of the program.

If the current program was reached through a subroutine call, the return address for the calling program should be the current address on the original stack. It is this address that must be saved.

There is a Z-80 instruction that allows the old stack pointer to be stored directly in main memory. The instruction looks like this.

```
; Z-80 VERSION
;
START:    LD      (OLDSTK),SP  ;save stack
          LD      SP,STACK     ;new stack
          . . .
          . . .
          LD      SP,(OLDSTK)  ;get old stack
          RET                  ;done
```

At the conclusion of the task, the old stack pointer is restored. With an 8080 CPU, the job is more complicated since the stack pointer cannot be directly saved. In this case, the stack pointer is moved to the HL register pair which is in turn saved in memory. This is done by first zeroing HL, then adding in the stack pointer. At the end of the routine, the old stack pointer is loaded into the HL register pair then copied into the stack pointer register. Finally, a RET instruction is given.

```
START:  LXI     H,0         ;zero HL
        DAD     SP          ;SP to HL
        SHLD    OLDSTK      ;save stack
        LXI     SP,STACK    ;new stack
        . . .
        . . .
        LHLD    OLDSTK      ;get old stack
        SPHL                ;restore stack
        RET
```

CALLING A SUBROUTINE IN ANOTHER PROGRAM

A program may need to call a subroutine that resides in another program. But if the second program is revised, the subroutine address in the second program will change. This means that the argument of the CALL statement in the first program will also have to be changed.

There are two ways to solve this problem. One method is to provide a jump instruction near the beginning of the second program. The address of the jump instruction will always be the same. However, its argument, the internal subroutine address, can change from one version to the next. The first program simply calls CHEK2, and CHEK2 causes a jump to CHEK, the desired subroutine. The RET instruction at the end of CHEK will effect a proper return to program 1.

```
                    . . .                  ; Program 1
!---------   CALL        CHEK2      ; call Program 2
!           . . .                   <-------------!
!           . . .                                 !
!   START:   JMP         CONTIN     ;start of Program 2   !
!->  CHEK2:  JMP         CHEK          >--------------!   !
!           . . .                                     !   !
!           . . .                                     !   !
    CHEK:   . . .                   <--------!         !
            RET                     ;to Program 1 >--------!
```

Of course, the second program may need to save the incoming stack, then restore it before returning to program 1.

A second solution is to place just the two-byte address of the subroutine near the beginning of the second program.

```
START:  JMP     CONTIN  ; Program 2
CHEK2:  DW      CHEK
```

Now the calling program must put its own return address on the stack and get the address of CHEK into the program counter. The following example is a way to do this. Notice that program 1 does not enter program 2 with a CALL instruction. It uses instead the PCHL instruction which copies the contents of HL into the program counter.

```
        PUSH    H           ;SAVE H,L
        LXI     H,NEXT      ;RET ADDR
        PUSH    H           ;ONTO STACK
        LHLD    CHEK2
        PCHL                ;INTO PC
NEXT:   POP     H           ;ORIG H,L
```

CALLING ONE SUBROUTINE FROM ANOTHER

A subroutine called by a main program may in turn call another subroutine. When the first subroutine, SUB1, is called, the return address to the main program, MAINA, is pushed onto the stack. When the second subroutine, SUB2, is called, the return address SUB1A is next pushed onto the stack. After the second subroutine has been called, there will be two return addresses on the stack: one to get back to SUB1 from SUB2, and the other to get back to the main program from SUB1.

```
                CALL    SUB1    ;MAIN
        MAINA:  . . .       <---!
                . . .           !
        ; SUBROUTINE 1          !
        ;                       !
        SUB1:   . . .           !
                CALL    SUB2    !
        SUB1A:  . . .       !       <------!
                RET         >--!            !
        ;                                   !
        ; SUBROUTINE 2                      !
        ;                                   !
        SUB2:   . .                         !
                . . .                       !
                RET             >-------!
```

```
STACK
  SP   !----------!        !----------!  SP   !----------!
 ===>  !  MAINA   !        !  MAINA   ! ===>  !  MAINA   !
       !----------!  SP    !----------!       !----------!
             ===>  !  SUB1A  !
                   !----------!

CALL SUB1    CALL SUB2              RET            RET
```
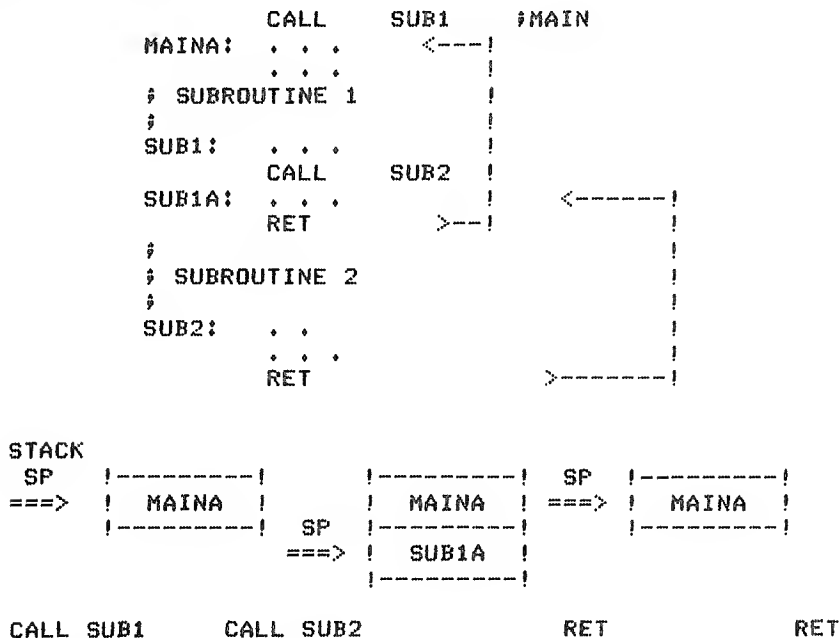
Figure 3.11. One subroutine calls another.

BYPASSING A SUBROUTINE ON RETURN

It may be that an operation in the sectond subroutine SUB2 makes it desirable to return directly to the main program from SUB2, bypassing SUB1. This is easily accomplished if the stack pointer is raised by two bytes before executing the return instruction. Of course, care should be taken to see if data has been pushed onto the stack after one or both return addresses were placed on the stack. The one-byte instruction to increment the stack pointer (INX SP) can be executed twice, to raise the stack pointer two bytes. Alternately, a one-byte POP command can be used if there is a free register pair available.

```
STACK
                !----------!   SP  !----------!
                !  MAIN2   !  ===> !  MAIN2   !
        SP      !----------!       !----------!
       ===>     !  SUB1A   !
                !----------!


    CALL SUB2              POP H              RET
```
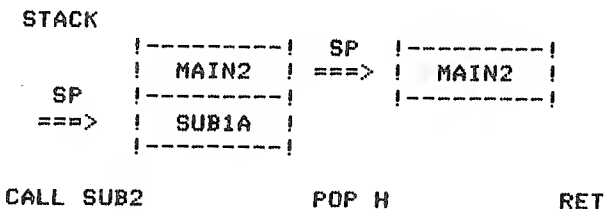
Figure 3.12.   Skipping one level of subroutine during the return.

Suppose that an ordinary return from subroutine SUB2 back to subroutine SUB1 is desired if the zero flag is set to 1. On the other hand, an unusual return directly back to the main program is desired if the zero flag is reset to a value of zero. Here is a way to do this.

```
            CALL      SUB1      ;MAIN
    MAIN1:  . . .                            <----------!
            . . .                                       !
    ; SUBROUTINE 1                                       !
    ;                                                    !
    SUB1:   . . .               ;SUBROUTINE 1           !
            CALL      SUB2                     <---!     !
    SUB1A:  . . .                                  !     !
            RET                                    !     !
                                                   !     !
    ; SUBROUTINE 2                                  !     !
    ;                                                !     !
    SUB2:   . . .                                   !     !
            . . .                                   !     !
            RZ                  ;NORMAL RETURN >-    !
            POP       PSW       ;RAISE STACK         !
            RET                 ;SKIP TO MAIN >------!
```
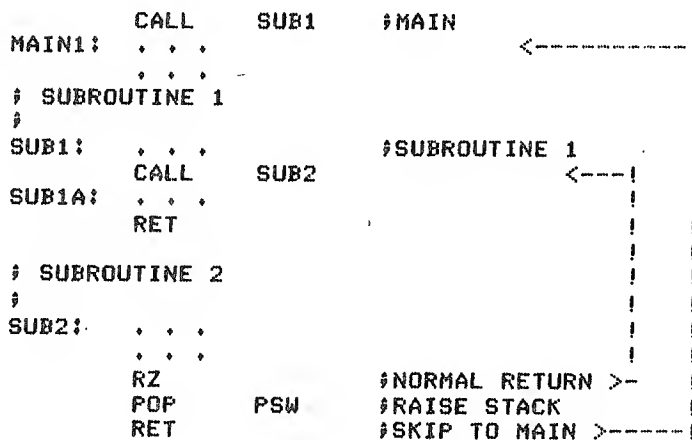
The POP PSW instruction raises the stack two bytes so that the final RET instruction delivers the return address of MAIN1 to the program counter. This effectively bypasses the intermediate subroutine.

A PUSH WITHOUT A POP

Near the beginning of the system monitor, explained in Chapter 6, there is a restart address called WARM. The program normally branches back to this point at the conclusion of each task. Thus the final instruction of each task could be:

```
JMP     WARM
```

A more efficient method, however, is to push this restart address WARM onto the stack at the beginning of the task. Then if the task does not terminate within a subroutine, a simple return instruction, rather than a jump, can be given at the end of the task. This causes a branch back to WARM.

```
WARM:   LXI     H,WARM  ;H,L = HERE   <----!
        PUSH    H       ;ONTO STACK        !
        . . .                              !
        . . .                              !
        JZ      OPORT                      !
        . . .                              !
OPORT:  . . .                              !
        RET         >----------------------!
```

This example is an exception to the rule that we should have a POP instruction for every PUSH. Here, there is a PUSH but no POP. Of course there is also a RET with no CALL. So everything is all right—or is it? What happens if termination occurs from a subroutine?

GETTING BACK FROM A SUBROUTINE

If a particular task terminates in a subroutine, then this subroutine's return address must be popped off the stack (or an INX SP instruction must be executed twice) before the return is issued.

```
WARM:   . . .                     <----------!
        JZ      DUMP                          !
        . . .                                 !
DUMP:   . . .                                 !
        CALL    TSTOP                         !
        . . .             <---------------!   !
        . . .                            !   !
TSTOP:  . . .                            !   !
        RNC             ;NORMAL RETURN >-!   !
        POP     H       ;RAISE STACK         !
        RET             ;TO WARM     >-------!
```

The stack pointer grows downward through memory during use. It is therefore common practice to place the stack as high as possible in available memory. But the system monitor may be located at the actual top of memory. In this case the stack can initially be placed lower in memory at the beginning of the monitor.

```
START:
        LXI     SP,START
```

On the other hand, the monitor may be placed in read-only memory (ROM). In this case, the stack can be located at the actual top of read/write memory. (While both read/write memory and ROM are random-access memory—RAM, it is customary to refer to read/write memory as RAM and read-only memory as ROM. This convention will be followed here.)

AUTOMATIC STACK PLACEMENT

The placement of the stack at the top of RAM can be done automatically, so that the total amount of RAM can be changed without having to reprogram the PROM monitor. A short routine can test each block of memory starting at zero until it finds a location that can't be changed. The stack is then put at the beginning of this block. Remember, the stack pointer is always decremented before use; therefore, it can be initially defined as one location above usable memory.

The first part of the program is a memory search routine that starts at address zero. It moves the byte from that location into the accumulator, complements it, then moves the complemented byte back to the original location. A comparison is made to see if the memory location does indeed contain the complemented byte. If it does, the accumulator is complemented back to the original byte and returned to memory. Such an algorithm is often called a nondestructive memory test.

The first byte of each subsequent block of memory is checked in this way until a failure is found. This will usually reflect the top of usable memory, but of course, it could indicate defective memory. The following program will work properly if placed in read-only memory.

```
;
; ROUTINE TO AUTOMATICALLY PLACE THE
; STACK AT THE TOP OF MEMORY
; 8080 CODE
;
        LXI     H,0     ;FIRST ADDR
NEXTP:  MOV     A,M     ;GET BYTE
        CMA             ;COMPLEMENT
        MOV     M,A     ;PUT IT BACK
        CMP     M       ;COMPARE?
        JNZ     TOP     ;NO, DONE
        CMA             ;BACK TO ORIG
        MOV     M,A     ;PUT IT BACK
        INR     H       ;NEXT BLOCK
        JMP     NEXTP   ;KEEP GOING
;
TOP:    SPHL            ;SET STACK
        CALL    OUTHL   ;PRINT IT
        .  .  .
```

This program might not work, however, if it is placed in read/write memory. The problem occurs because the routine is changing various locations in memory. If it happens to change its own instructions, then the results will be unpredictable.

The shortcomings of the previous program are solved with the following version. The improved version will operate properly no matter where it is placed. The stack will be placed at the top of contiguous RAM unless the routine itself is in that part of memory. In that case, the stack will be placed at the beginning of the program. The Z-80 version is shown, but the program can be run on an 8080 if two minor changes are made. The relative jump instruction must be changed to an absolute jump and the DJNZ instruction must be changed to the equivalent DCR B and JNZ combination.

```
;
; ROUTINE TO AUTOMATICALLY PLACE THE
; STACK AT THE TOP OF MEMORY
; FAILSAFE VERSION  (Z-80 CODE)
;
START:  LD      HL,0      ;START CHECK AT 0
        LD      B,START SHR 8
NEXTP:  LD      A,(HL)    ;GET BYTE
        CPL               ;COMPLEMENT IT
        LD      (HL),A    ;PUT IT BACK
        CP      (HL)      ;DID IT GO?
        JR      Z,TOP     ;NO, DONE
        CPL               ;BACK TO ORIG
        LD      (HL),A    ;RESTORE
        INC     H         ;NEXT BLOCK
        DJNZ    NEXTP     ;ARE WE HERE?
;
TOP:    LD      SP,HL     ;SET STACK
        . . .
```

The new version works in the following way. The B register initially contains the block number of the routine itself. The value in B is decremented as each successive block is checked. If the routine is in ROM, then the end of usable memory will be found, as in the previous version. The program will loop between the label NEXTP and the DJNZ NEXTP instruction. At some point, the CP (HL) instruction will reset the zero flag and the computer will jump to the address of TOP. The stack will then be placed at the top of RAM.

Alternately, if this routine is placed in the lower memory area, then the DJNZ instruction will decrement the B register all the way to zero. The zero flag will be set and the program will move on to TOP. Now the stack will be set to the beginning of the memory block that contains the program itself.

The START SHR 8 expression at the beginning of the routine instructs the assembler to calculate the high byte of the address of START and make it the second operand of the LD B instruction. It does this by shifting the

address of START by eight bits to the right, then taking the low-order eight bits of the result. Some assemblers allow an equivalent operand of

```
HIGH    START
```

which is easier to comprehend. This automatic stack routine is incorporated into the system monitor explained in Chapter 6.

CHAPTER FOUR

Input and Output

Computers would not be very useful if they could not interact with the outside world. Commands and data are sent to the computer from the keyboard, magnetic tape, disk, and other peripherals. Results of computations are sent back from the computer to the printer, video terminal, tape unit, disk, and so on. Such input and output (I/O) transfers on a microcomputer are typically accomplished through special memory locations called I/O *ports*. One type of port is distinctly different from main memory. The other type of arrangement utilizes one of the regular main memory locations. The peripheral in this latter case is then said to use *memory-mapped* I/O. Each method has advantages and disadvantages. In either case, the I/O port will transfer eight bits, the natural word size for the 8080 and Z-80 CPUs.

MEMORY-MAPPED I/O

The I/O instructions on the 8080 microprocessor are rather limited compared to memory operations. There is a single IN and a single OUT instruction for transferring eight bits of data. In contrast, there is a much larger collection of memory operations available.

```
(8080 Mnemonics)          (Z-80 mnemonics)
    STA      80            LD      (80),A
    LDA      81            LD      A,(81)
    MOV      M,C           LD      (HL),C
    STAX     D             LD      (DE),A
    SHLD     84            LD      (84),HL
```

These additional instructions can be utilized with memory-mapped I/O, greatly increasing the versatility of the Z-80 and 8080 I/O operations.

The STA instruction stores the 8-bit accumulator value at the memory address specified by the operand. If this address corresponds to a memory-mapped port, then the byte is sent to the peripheral. The LDA command reverses the operation. It can be used to input a byte from a port. The MOV M,C instruction can be used to transfer a byte from the C register to the memory location designated by the HL register pair. The STAX D command moves a byte from the accumulator to the memory location designated by the DE register pair. The SHLD instruction opens a new dimension. Since this operation transfers 16 bits of data from the HL register pair directly into two consecutive memory locations, two adjacent ports can be simultaneously serviced.

The typical video console is a serial device that uses distinct ports. However, memory-mapped controller boards are commerically available. In this case, an ordinary TV set is then used for the video screen. There are also disk-controller boards that use memory-mapped operations to communicate with the disk drives. It is interesting to note that the Motorola 6600 CPU performs all of its I/O by memory mapping. There are no separate input or output instructions for this CPU.

DISTINCT DATA PORTS

Data ports may be designed to operate either in parallel or in serial fashion. Both the parallel and the serial I/O ports are connected to the computer through the system bus by a set of eight data lines. In addition, the parallel port is connected to the peripheral by another set of eight data lines. The serial port, by contrast, has only two data lines connecting it to the peripheral.

For some peripherals, such as a printer, data is transferred in only one direction. For others, such as the console and magnetic tape units, the peripheral is able to both send and receive data. In this latter case, there will be 16 data lines between the computer and the peripheral if a parallel port is used. Eight lines are used for sending data and eight are used for receiving data. The serial port, in contrast, will have three signal lines to the peripheral if there is two-way communication. One is for transmitting, one is for receiving, and the third is a common line for the other two.

There may be additional lines between the computer and the peripheral. One of these might indicate to the computer whether the terminal is operational. Another can be used to inform the terminal that the computer is ready. These extra lines are sometimes referred to as *handshake* lines.

The computer usually operates at a much higher speed than the peripherals. Consequently, there must be a mechanism for effectively slowing down the computer during I/O operations. For serial or parallel ports, this is typically accomplished by using two separate I/O ports for each peripheral device. One port is used for the data port and the other is used for the status port. Each of these two ports will have distinct addresses, one of the 256 values available to the 8080 or Z-80 CPU for this purpose. There are three

general methods of performing I/O through data ports: looping, polling, and interrupting.

LOOPING

Looping is the simplest method of performing I/O through separate ports, and it is the one that is most commonly employed in 8080 and Z-80 programs. The CPU performs output by sending a byte to the data port using the OUT instruction. The corresponding status port is then read with an IN instruction. One bit of the 8-bit status port reflects the condition of the corresponding peripheral.

When the CPU places a byte in the data register, using the OUT command, the output status bit of the status register is set. This may actually result in a logical 1 or a logical zero, depending on the port design. When the peripheral utilizes the byte that was placed into the data register, the output status bit of the status register is reset. These changes in the status bit are automatically handled by the I/O interface hardware. However, the programmer must include in the software the appropriate routines for monitoring the status bits.

As an example of the looping method, consider the following subroutine:

```
COUT:   IN      10H     ;CHECK STATUS
        ANI     2       ;SELECT BIT
        JZ      COUT    ;NOT READY
        MOV     A,C     ;GET BYTE
        OUT     11H     ;SEND
        RET             ;DONE
```

This routine could be used to send a byte of data to the system console. The first instruction of the listing causes the CPU to read the 8-bit status port which has the address of 10 hex. The second instruction performs a masking AND operation to select the write-ready bit, bit 1. Remember that a logical AND with zero and anything else gives a result of zero. However, a logical AND with unity and a second logical value, gives the result of that second value.

Suppose that the output status is indicated by a logical 1 of bit 1, where bit 0 is the least-significant bit of the register. Then, a logical AND with the value in the status register and with the number 2 will result in a logical 1 if the peripheral is ready. If the device is not ready, however, the result is a logical 0.

```
        0101 0111   status    0101 0101
AND     0000 0010   = 2       0000 0010
        ---------             ---------
        0000 0000             0000 0010
          ready              not ready
```

Thus, the logical AND with the value of 2 in the status register gives a result of zero if bit 1 (the second bit) is 0. Otherwise, a nonzero result is obtained.

The third instruction in the looping example is a conditional jump. If the peripheral is not ready, the JZ instruction will cause the computer to loop repeatedly through the first three lines until the peripheral is ready for another byte. At this point, the write-ready bit, bit 1, will be a logical 1. Then the logical AND operation, the second instruction of the subroutine, produces the nonzero value of 2. The MOV instruction following the conditional jump will then be executed. The byte to be outputted is moved to the accumulator, and then sent to data port 11 hex by use of the OUT command.

When the byte to be output is actually sent to the data port, the write-ready flag is reset to a logical zero. The output routine may be immediately reentered for outputting another byte, but now the peripheral is not ready. Looping will occur again through the first three instructions of the output routine since the write-ready flag has been reset to zero.

The CPU clock may be operating at 2 or 4 MHz. This rate is thousands of times faster than the speed of a typical printer. Consequently, if the looping method is used, the CPU will be spending over 99 percent of its time simply looping through the first three lines of the output subroutine. The computer will be spinning its wheels, so to speak, waiting on the peripheral.

Because the CPU is operating so much faster than the peripherals, it can, in principle, service many peripherals simultaneously. A very simple but useful implementation of this idea is found on the CP/M* operating system. In the CP/M system,* console output is normally sent only to the console. This terminal is typically a high-speed video device. But if the user types a Control-P, then the list device is also turned on. Console output will now appear simultaneously at both the console and the line printer.

This technique can be easily observed if the console video accepts data much faster than the line printer. Normally, as data is sent only to the console, it appears rapidly on the video screen. But when the list device is turned on, the output appears much more slowly. The reason for the slowdown is that both peripherals are operating at the speed of the slower one, in this case the printer.

A subroutine for accomplishing such a dual output might look like this.

```
LOUT:   IN      LSTAT   ;LIST STATUS
        ANI     2       ;OUTPUT MASK
        JZ      LOUT    ;LOOP UNTIL READY
        MOV     A,C     ;GET THE BYTE
        OUT     LDATA   ;SEND TO LIST
        OUT     CDATA   ;AND CONSOLE
        RET             ;DONE
```

---

*CP/M is a registered trademark of Digital Research, Inc., Pacific Grove, California.

This routine is not the one that is actually used in the CP/M system since, with our routine, the console will always display everything that is sent to the printer. This feature does not increase printing time as long as the console operates faster than the printer. Notice that there is no need to check the console status register. The output rate is set at the speed of the printer, and so the console, which operates so much faster, will always be ready if the printer is ready.

POLLING

One way to improve the performance, or throughput, of a CPU is with a technique known as polling. In this method, the CPU sends a byte to each of several different peripherals. Each peripheral operates at its full speed. Polling is more efficient than the looping method, and has been incorporated into several commercial 8080 software products. One product is a multiuser BASIC which can service up to four separate consoles. Each user can independently perform calculations using the same BASIC interpreter.

Another product that uses the polling technique is known as a *spooler*. The looping method is typically utilized for all output. In this case, all other activities must be halted while the printer is working. With a spooler program, however, things are different. When this program is incorporated into the system, the user can perform other tasks using the system console while a disk file is being printed.

In the polling method, the I/O routines are somewhat different from the corresponding routines of the looping method. The output-ready flag of the status register is checked periodically as with the looping method. But if the status flag indicates that the device is not ready, the CPU returns to perform some other task. Thus, the CPU does not waste time looping around the first three instructions of the input or output routine. A typical output routine using the polling method might look like tihis.

```
LOUT:   IN      LSTAT   ;CHECK STATUS
        ANI     LMASK   ;MASK FOR OUTPUT
        RZ              ;NOT READY
        MOV     A,C     ;GET THE BYTE
        OUT     LDATA   ;SEND IT
        RET
```

While the polling method is a great improvement over the looping method, there are still problems. For example, a decision must be made as to how often each status register will be polled. An even better method is to use hardware interrupts.

HARDWARE INTERRUPTS

The 8080 and Z-80 microprocessors incorporate a hardware interrupt system. This feature allows an external device, such as the system console or printer,

to interrupt the current task of the processor. When the CPU is interrupted, it suspends its current task, and calls on one of several memory locations set aside for this purpose. The CPU services the request of the interrupting peripheral, then it returns to its previous task.

In this method, the CPU does not have to be programmed to check the peripherals on a regular basis as with the method of polling; nor does it have to waste time in a loop. Instead, the peripheral interrupts the processor when it needs service. If several peripherals are able to interrupt the CPU, then there must be a method for prioritizing the requests. This ordering is accomplished through a vectored interrupt system. For example, if a lower-priority device has interrupted the CPU for service, this phase can also be interrupted by a peripheral with a higher priority. On the other hand, a device with a lower priority cannot interrupt a higher-priority service, but must wait its turn.

Usually, the highest-priority interrupt will be assigned to updating the system clock. If the computer misses a beat, then the time will be incorrect. The next lower priority could be assigned to disk transfer. The printer could have a low priority since it is a relatively slow device, and it won't matter if it must slow down every so often.

Suppose that the printer is operated by interrupts rather than by looping or polling. The computer sends a byte to the printer, then continues with another task. When the current byte has actually been printed, the printer interrupts the CPU for another byte. In the time between the printing of two bytes, the CPU can perform many other tasks.

The console keyboard is another peripheral that can be readily serviced by an interrupt system. In this case, each time the user presses a key, the CPU is interrupted from its current task. Of course, if the CPU is currently servicing a higher-priority interrupt, then the console keyboard request will have to wait.

Both the 8080 and the Z-80 allocate eight addresses that can be used for the interrupt service routines. These addresses can be called by the eight, one-byte RST instructions.

Z-80 mnemonic	8080 mnemonic	Instruction code hex	Instruction code binary	Call address
RST 00H	RST 0	C7	1100 0111	00H
RST 08H	RST 1	CF	1100 1111	08H
RST 10H	RST 2	D7	1101 0111	10H
RST 18H	RST 3	DF	1101 1111	18H
RST 20H	RST 4	E7	1110 0111	20H
RST 28H	RST 5	EF	1110 1111	28H
RST 30H	RST 6	F7	1111 0111	30H
RST 38H	RST 7	FF	1111 1111	38H

These instructions can be used as one-byte subroutine calls. As an example, suppose that the CPU executes an RST 5 instruction which corresponds to the instruction code EF hex. A subroutine call is then made to the corresponding address of 28 hex. The return address is pushed onto the stack,

just as for a regular subroutine call. Subsequent execution of a return instruction will cause the program flow to return to the instruction immediately following the RST 5 instruction.

Hardware interrupts operate by emulating the software RST call. When an interrupt occurs, the CPU automatically disables the interrupt flip-flop, thus further interrupts are prevented. Then a subroutine call is made to the corresponding call address. This is done by jamming the desired RST code onto the data bus. The simplest implementation is to use a single interrupting device and the RST 7 instruction. (A normal interrupt always performs an RST 7.) The interrupting peripheral momentarily changes the state of the interrupt-request bus line. For the S-100 bus, this would require that bus line 73 be pulled to a zero-voltage state from the usual 5-volt level. The CPU responds by automatically calling memory address 38 hex. The programmer will have previously placed the service routine at this location. The service routine will conclude with a command to re-enable the interrupt flip-flop. Then a return instruction will be executed.

The trouble with this simple approach is that the RST 7 call to location 38 hex interferes with system debuggers because they also use this address. Consequently, another interrupt level is more suitable. Unfortunately, a single interrupt system always calls the RST 7 location. One solution to this problem is to use a vectored interrupt board. A vectored interrupt board allows the user to select up to eight separate interrupt levels corresponding to the RST 0 to 7 instructions. The disadvantage of this approach is the cost, since a vectored interrupt board may sell for several hundred dollars.

However, there is a low-cost solution. If only one interrupt level is required, a single hardware interrupt can be converted from an RST 7 to some other level such as an RST 5 by using only two logic gates. The circuit shown in Figure 4.1 will make the needed translation. The output of the two-input NAND gate IC-1 goes low when both of the input lines are high. One of these inputs is SINTA, line 96 on the S-100 bus. It is a CPU status signal that indicates acknowledgment of the interrupt request. The other input is PDBIN, bus line 78. This signal indicates that the data bus is in the input mode.
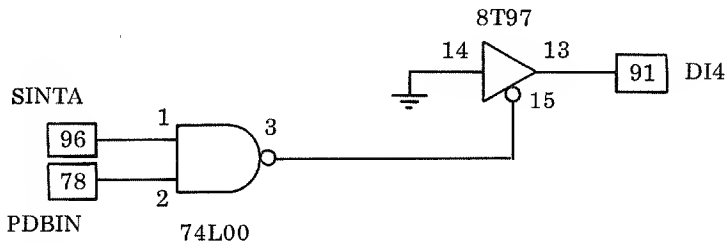
Figure 4.1.   Circuit to convert an 8080 interrupt to an RST 5.

When the output of IC-1 goes low, it turns on the three-state buffer IC-2. This pulls the data-input bus line DI4 low. Since the remaining seven lines of the data-in bus are high, the CPU will see the value of

1110 1111

Notice that this is the bit pattern for the RST 5 instruction. The result is that the CPU executes an RST 5 instruction, by calling address 28 hex. The interrupt service routine, or a jump to it, is placed at this address.

AN INTERRUPT-DRIVEN KEYBOARD

We have seen that a printer operates considerably slower than a CPU. The console keyboard is even slower than the printer, especially if the operator is not an expert typist. Conversion to an interrupt-driven keyboard will considerably increase the effectiveness of a computer.

Characters entered on an interrupt-driven keyboard are temporarily stored in a memory buffer area. Each time a key is pressed on the console, the CPU is interrupted from its current task. The new byte is read and placed into the keyboard buffer. The computer then returns to its prior task. When the computer needs console input, it gets it from the input buffer, rather than from the console itself.

An interface program, utilizing a keyboard-interrupt approach, is shown in Listing 4.1. This program provides the necessary routines for interfacing the Lifeboart version of CP/M to a North Star disk system.* The portions of the program which specifically utilize the interrupt routines begin with a row of asterisks and end with a row of semicolons.

Computer pointer F400	Computer count F402	Keyboard count F403	Keyboard pointer F404	Buffer F406

Figure 4.2.   The input buffer and pointers.

The layout of the memory buffer with its pointers is shown in Figure 4.2. The buffer area is arbitrarily chosen to start at the address of F400 hex. The location can be anywhere above the CP/M operating system. There is only one keyboard buffer, but there are two sets of pointers: one for the CPU and one for the keyboard. Two counters are also utilized; one shows how many characters have been entered from the keyboard and the other shows how many have been read by the computer. Since both sets of pointers grow larger, they need to be reset periodically. The two pointers are compared after each carriage return. If they are the same, then they are both reset to the beginning of the buffer.

Suppose that this interface program is incorporated into your system. CP/M might be printing something on the console video screen when a key on the console is pressed. A hardware interrupt will occur, causing the computer to stop its task and call address 28 hex (RST 5). A jump instruction at address 28 hex will transfer control to subroutine KEYBD. The keyboard

---

*Lifeboart Associates, 2248 Broadway, New York, N.Y. 10024.

Listing 4.1. Interrupt driven keyboard.

```
                   TITLE     'Interrupt CP/M BIOS'
                   ;
                   ; (Put today's date here)
                   ;
                   ; LIFEBOAT VERSION WITH OPTION FOR
                   ; EITHER SINGLE OR DOUBLE DENSITY
                   ;
                   ; TERMINAL DEVICES SUPPORTED:
                   ;
                   ;   CONSOLE      10 HEX   CON:
                   ;   LIST·        12 HEX   LST:
                   ;   PHONE MODEM  14 HEX   PUN:
                   ;
0000 =             FALSE     EQU     0
FFFF =             TRUE      EQU     NOT FALSE
                   ;
FFFF =             DOUBLE    EQU     TRUE      ;DOUBLE DENSITY
FFFF =             INTRM     EQU     TRUE      ;INTERR VERSION
                   ;
                   IF        DOUBLE
0036 =             MSIZE     EQU     54        ;DECIMAL K
D600 =             BIOS      EQU     MSIZE*1024-200H
DB00 =             USER      EQU     BIOS+500H
4900 =             OFFSET    EQU     1F00H-BIOS
                   ELSE      ;SINGLE DENSITY
                   MSIZE     EQU     56
                   USER      EQU     MSIZE*1024-700H
                   ENDIF
0003 =             IOBYTE    EQU     3         ;I/O SETUP
000D =             CR        EQU     0DH       ;CARRIAGE RET
000A =             LF        EQU     0AH       ;LINEFEED
000C =             FFEED     EQU     12        ;FORMFEED
0003 =             CTRC      EQU     3         ;^C, KILL SCROLL
0004 =             CTRD      EQU     4         ;^D, EMPTY BUFFER
0011 =             CTRQ      EQU     17        ;^Q, SCROLL
0013 =             CTRS      EQU     19        ;^S, FREEZE SCROLL
                   ;
                   IF        DOUBLE
                   ; PATCH DATE
D5B1               ORG       BIOS-100H+0B1H
                   ELSE
                   ORG       USER-600H+0AFH
                   ENDIF
D5B1 2E4465        DB        '.Jan 28,80' ;PATCH DATE
                   ;
DB00               ORG       USER
                   ;
0010 =             CSTAT     EQU     10H       ;CONSOLE STATUS
0011 =             CDATA     EQU     CSTAT+1 ;CONSOLE DATA
0001 =             CIMSK     EQU     1         ;INPUT MASK
0002 =             COMSK     EQU     2         ;OUTPUT MASK
0012 =             LSTAT     EQU     12H       ;LIST STATUS
0013 =             LDATA     EQU     LSTAT+1 ;LIST DATA
0001 =             LIMSK     EQU     1         ;INPUT MASK
0002 =             LOMSK     EQU     2         ;OUTPUT MASK
0000 =             LNULL     EQU     0         ;LIST NULLS
```

```
0014 =            MSTAT   EQU     14H       ;MODEM  STATUS
0015 =            MDATA   EQU     MSTAT+1 ;MODEM DATA
0040 =            MIMSK   EQU     40H       ;INPUT MASK
0080 =            MOMSK   EQU     80H       ;OUTPUT MASK
                  ;
                  ; INITIALIZE PORTS FOR COMPUTIME BOARD
                  ;
00C4 =            ADATA   EQU     0C4H
00C5 =            ACONT   EQU     ADATA+1
00C6 =            BDATA   EQU     ADATA+2
00C7 =            BCONT   EQU     ADATA+3
                  ;
                  ;*****************************************
                          IF      INTRM     ;INTERRUPTS
0095 =            STOP    EQU     95H       ;SET FOR INTERR
                  ;
                  ; CONSOLE INPUT-BUFFER LOCATION
                  ;
F400 =            BUFFER  EQU     0F400H    ;INPUT BUFFER
F400 =            CPNTR   EQU     BUFFER    ;COMPUTER POINTER
F402 =            CCNT    EQU     CPNTR+2 ;BUFFER COUNT
F403 =            KCNT    EQU     CCNT+1    ;KEYBRD BUFF COUNT
F404 =            KPNTR   EQU     KCNT+1    ;KEYBOARD POINTER
F406 =            BUFF    EQU     KPNTR+2 ;INPUT BUFFER
0005 =            LEV     EQU     5         ;INTERR LEVEL
                          ENDIF             ;INTERRUPTS
                  ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                  ;
                  START:
DB00 C315DB               JMP     INIT      ;INITIALIZATION
DB03 C3ABDB               JMP     CONST     ;CONSOLE STATUS
DB06 C3D3DB               JMP     CONIN     ;CONSOLE INPUT
DB09 C312DC               JMP     CONOUT    ;CONSOLE OUTPUT
DB0C C326DC               JMP     LOUT      ;LIST OUTPUT
DB0F C348DC               JMP     PUNCH
DB12 C3D3DB               JMP     CONIN     ;FOR READER
                  ;
                  ; INITIALIZATION ROUTINES
                  ;
DB15 3E03         INIT:   MVI     A,3
DB17 D310                 OUT     CSTAT     ;RESET
DB19 D312                 OUT     LSTAT     ;INTERFACE
DB1B 3E15                 MVI     A,15H
DB1D D312                 OUT     LSTAT
                  ;
                          IF      INTRM
DB1F 3E95                 MVI     A,STOP    ;SET FOR INTERR.
                          ENDIF
                  ;
DB21 D310                 OUT     CSTAT     ;INTERFACE
                  ;
                  ; COMPUTIME BOARD INITIALIZATION
                  ;
DB23 AF                   XRA     A         ;GET A ZERO
DB24 D3C5                 OUT     ACONT
DB26 D3C7                 OUT     BCONT
DB28 3E70                 MVI     A,70H
DB2A D3C4                 OUT     ADATA
```

```
DB2C 3E77                    MVI      A,77H
DB2E D3C6                    OUT      BDATA
DB30 3E14                    MVI      A,14H
DB32 D3C5                    OUT      ACONT
DB34 3E04                    MVI      A,4
DB36 D3C7                    OUT      BCONT
                   ; ********************************
                             IF       INTRM
                   ;
                   ; PATCH RST LOCATION TO JUMP TO KEYBD
                   ;
DB38 F3                      DI                ;DISABLE INTERR
DB39 3EC3                    MVI      A,0C3H   ;JMP INSTR
DB3D 322800                  STA      8*LEV    ;PATCH RST
DB3E E5                      PUSH     H
DB3F 215BDB                  LXI      H,KEYBD  ;INTERR ENTRY
DB42 222900                  SHLD     8*LEV+1  ;JUMP HERE
DB45 2106F4                  LXI      H,BUFF   ;BUFFER ADDR
DB48 2204F4                  SHLD     KPNTR    ;RESET POINTERS
DB4B 2200F4                  SHLD     CPNTR
DB4E 210000                  LXI      H,0      ;2 ZEROS
DB51 2202F4                  SHLD     CCNT     ;ZERO THE COUNTS
DB54 E1                      POP      H
DB55 FB                      EI                ;RE-ENABLE INTERR
                             ENDIF             ;INTERRUPTS
                   ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                   ;
                   ; INITIALIZE IOBYTE
                   ;
DB56 AF                      XRA      A        ;RESET IOBYTE
DB57 320300                  STA      IODYTE
DB5A C9                      RET
                   ;********************************************
                             IF       INTRM
                   ;
                   ; INTERRUPT ENTRY FOR KEYBOARD INPUT
                   ;
DB5B F5           KEYBD:     PUSH     PSW
DB5C DB10                    IN       CSTAT    ;CONSOLE STATUS
DB5E E601                    ANI      CIMSK
DB60 CA92DB                  JZ       KEY2     ;NOT READY
DB63 DB11                    IN       CDATA    ;GET DATA
DB65 E67F                    ANI      7FH      ;MASK PARITY
                   ;
                   ; CHECK FOR ^S, ^Q SCROLL CONTROL
                   ;
DB67 FE13                    CPI      CTRS     ;^S
DB69 C27FDB                  JNZ      KEY3     ;NO
DB6C DB10         KEY4:      IN       CSTAT    ;CHECK KEYBOARD
DB6E E601                    ANI      CIMSK    ;READY?
DB70 CA6CDB                  JZ       KEY4     ;LOOP UNTIL READY
DB73 DB11                    IN       CDATA    ;GET BYTE
DB75 E67F                    ANI      7FH      ;STRIP PARITY
DB77 FE11                    CPI      CTRQ     ;^Q?
DB79 C26CDB                  JNZ      KEY4     ;NO
DB7C C392DB                  JMP      KEY2
                   ;
```

```
DB7F E5         KEY3:   PUSH    H
DB80 FE04               CPI     CTRD    ;EMPTY BUFFER?
DB82 CA95DB             JZ      KEY6    ;YES
DB85 2A04F4             LHLD    KPNTR   ;BUFFER POINTER
DB88 77                 MOV     M,A     ;PUT IT THERE
DB89 23                 INX     H       ;INR POINTER
DB8A 2204F4             SHLD    KPNTR   ;SAVE POINTER
DB8D 2103F4             LXI     H,KCNT  ;GET COUNT
DB90 34                 INR     M       ;INCREMENT IT
DB91 E1         KEY5:   POP     H
                ;
DB92 F1         KEY2:   POP     PSW
DB93 FB                 EI
DB94 C9                 RET
                ;
DB95 CD9BDB     KEY6:   CALL    RSETP   ;RESET POINTERS
DB98 C391DB             JMP     KEY5
                ;
                ; RESET BOTH POINTERS TO START
                ;
DB9B 210000     RSETP:  LXI     H,0
DB9E 2202F4             SHLD    CCNT    ;ZERO BOTH
DBA1 2106F4             LXI     H,BUFF
DBA4 2204F4             SHLD    KPNTR   ;RESET PNTRS
DBA7 2200F4             SHLD    CPNTR
DBAA C9                 RET
                        ENDIF           ;INTERRUPTS
                ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                ;
                ; CHECK FOR CONSOLE INPUT READY
                ;
DBAB 3A0300     CONST:  LDA     IOBYTE
DBAE E602               ANI     2
DBB0 C2CBDB             JNZ     LISST   ;LIST
                ;
                ;**********************************
                        IF      INTRM
                ;
                ; CHECK INPUT BUFFER RATHER THAN KEYBOARD
                ;
DBB3 E5                 PUSH    H
DBB4 2A02F4             LHLD    CCNT    ;BOTH COUNTS
DBB7 7C                 MOV     A,H
DBB8 95                 SUB     L       ;DIFFERENCE
DBB9 E1                 POP     H
DBBA C8                 RZ              ;NO INPUT
                ;
DBBB E5                 PUSH    H
DBBC 2A00F4             LHLD    CPNTR   ;COMPUTER PNTR
DBBF 7E                 MOV     A,M     ;NEXT CHAR
DBC0 E1                 POP     H
DBC1 FE03               CPI     CTRC    ;^C?
DBC3 CAC8DB             JZ      QUIT    ;YES, QUIT
                ;
                ; MAKE CP/M THINK THERE IS NO INPUT
                ; SO SCROLLING WON'T BE ABORTED
                ;
```

```
DBC6 AF                      XRA     A         ;GET ZERO
DBC7 C9                      RET
                 ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                 ;
                             ELSE              ;NOT INTERRUPTS
                             IN      CSTAT     ;GET STATUS
                             ANI     CIMSK
                             RZ                ;NOT READY
                             ENDIF             ;INTERRUPTS
                 ;
DBC8 3EFF        QUIT:       MVI     A,TRUE
DBCA C9                      RET               ;INPUT READY
                 ;
                 ; LIST READY FOR CONSOLE
                 ;
DBCB DB12        LISST:      IN      LSTAT
DBCD E601                    ANI     LIMSK
DBCF C8                      RZ                ;NOT READY
DBD0 3EFF                    MVI     A,TRUE
DBD2 C9                      RET               ;READY
                 ;
                 ; CONSOLE INPUT
                 ;
DBD3 3A0300      CONIN:      LDA     IOBYTE
DBD6 E602                    ANI     2
DBD8 C206DC                  JNZ     LIN       ;LIST INPUT
                 ;
                 ;****************************************
                             IF      INTRM     ;INTERRUPTS
                 ;
                 ; GET INPUT FROM KEYBOARD BUFFER
                 ; INSTEAD OF FROM CONSOLE
                 ;
DBDB E5                      PUSH    H
DBDC 2A02F4      CIN3:       LHLD    CCNT      ;BOTH COUNTS
DBDF 7C                      MOV     A,H
DBE0 95                      SUB     L         ;SAME?
DBE1 CADCDB                  JZ      CIN3      ;KEEP TRYING
DBE4 F3                      DI                ;HOLD OFF
DBE5 2102F4                  LXI     H,CCNT    ;COMPUTER COUNT
DBE8 34                      INR     M         ;INCREMENT IT
DBE9 2A00F4                  LHLD    CPNTR     ;COMPUTER PNTR
DBEC 7E                      MOV     A,M       ;GET BYTE
                 ;
                 ; RESET BOTH POINTERS IF CARR RET FOUND
                 ;
DBED 23                      INX     H         ;BUMP POINTER
DBEE 2200F4                  SHLD    CPNTR     ;SAVE IT
DBF1 FE0D                    CPI     CR        ;CARRIAGE RET?
DBF3 C203DC                  JNZ     CIN4      ;NO
DBF6 2A02F4                  LHLD    CCNT      ;GET BOTH COUNTS
DBF9 7C                      MOV     A,H
DBFA 95                      SUB     L         ;DIFFERENCE
DBFB C201DC                  JNZ     CIN5      ;NOT SAME
                 ;
                 ; RESET BOTH POINTERS TO ZERO
                 ;
```

```
DBFE CD9BDB                 CALL    RSETP
DC01 3E0D       CIN5:       MVI     A,CR        ;RESTORE CR
DC03 E1         CIN4:       POP     H
DC04 FB                     EI                  ;READY FOR MORE
DC05 C9                     RET
                ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                            ELSE                ;NO INTERRUPTS
                ;
                CIN2:       IN      CSTAT       ;CHECK STATUS
                            ANI     CIMSK
                            JZ      CIN2
                            IN      CDATA       ;GET DATA
                            ANI     7FH         ;MASK PARITY
                            RET
                            ENDIF               ;INTRM
                ;
                ; CONSOLE INPUT FROM LIST
                ;
DC06 DB12       LIN:        IN      LSTAT
DC08 E601                   ANI     LIMSK
DC0A CA06DC                 JZ      LIN
DC0D DB13                   IN      LDATA
DC0F E67F                   ANI     7FH
DC11 C9                     RET
                ;
                ; CONSOLE OUTPUT
                ;
DC12 3A0300     CONOUT:     LDA     IOBYTE      ;WHERE?
DC15 E603                   ANI     3
DC17 B7                     ORA     A
DC18 E22EDC                 JPO     LIST
                ;
DC1B DB10       CONW:       IN      CSTAT       ;CHECK STATUS
DC1D E602                   ANI     COMSK
DC1F CA1BDC                 JZ      CONW
DC22 79                     MOV     A,C         ;GET BYTE
DC23 D311                   OUT     CDATA       ;SEND IT
DC25 C9                     RET
                ;
                ; LIST OUTPUT
                ;
DC26 3A0300     LOUT:       LDA     IOBYTE
DC29 E640                   ANI     40H         ;BIT 6
DC2B C21BDC                 JNZ     CONW        ;CONSOLE OUT
                ;
DC2E DB12       LIST:       IN      LSTAT       ;CHECK STATUS
DC30 E602                   ANI     LOMSK
DC32 CA2EDC                 JZ      LIST
DC35 79                     MOV     A,C         ;GET BYTE
DC36 D313                   OUT     LDATA       ;SEND IT
                ;
                            IF      LNULL > 0
                ;
                ; NULLS FOR LIST DEVICE
                ;
```

```
                             ANI      7FH
                             CPI      CR
                             JNZ      FORM
                             MVI      C,0
                             CALL     LIST       ;1 NULL
                             CALL     LIST       ;2 NULLS
                             CALL     LIST       ;3 NULLS
                             JMP      LIST       ;4 NULLS
                             ENDIF
                     ;
DC38 FE0C            FORM:    CPI      FFEED      ;FORMFEED?
DC3A C0                       RNZ                 ;NO
                     ;
                     ; EMULATE FORMFEED WITH 9 LINES
                     ;
DC3B C5                       PUSH     B
DC3C 010A09                   LXI      B,900H+LF
DC3F CD2EDC          LSKIP:   CALL     LIST
DC42 05                       DCR      B
DC43 C23FDC                   JNZ      LSKIP
DC46 C1                       POP      B
DC47 C9                       RET
                     ;
                     ; PUNCH OUTPUT SENT TO MODEM
                     ;
DC48 79              PUNCH:   MOV      A,C        ;GET BYTE
DC49 E67F                     ANI      7FH
DC4B B7                       ORA      A          ;NULL?
DC4C C8                       RZ                  ;DON'T SEND
DC4D FE0A                     CPI      LF
DC4F C8                       RZ                  ;SKIP LINEFEED
DC50 CD69DC                   CALL     MOUT       ;SEND
DC53 FE0D                     CPI      CR
DC55 CA5EDC                   JZ       MODCR      ;WAIT FOR CR
DC58 CD74DC                   CALL     MIN        ;MODEM INPUT
DC5B D311                     OUT      CDATA      ;SEND TO CONSOLE
DC5D C9                       RET
                     ;
                     ; SEND <CR> TO MODEM, WAIT FOR ONE BACK
                     ;
DC5E CD74DC          MODCR:   CALL     MIN
DC61 D311                     OUT      CDATA      ;TO CONSOLE
DC63 FE0D                     CPI      CR
DC65 C25EDC                   JNZ      MODCR      ;KEEP TRYING
DC68 C9                       RET
                     ;
                     ; MODEM OUTPUT
                     ;
DC69 DB14            MOUT:    IN       MSTAT      ;CHECK STATUS
DC6B E680                     ANI      MOMSK
DC6D CA69DC                   JZ       MOUT
DC70 79                       MOV      A,C        ;GET BYTE
DC71 D315                     OUT      MDATA      ;SEND IT
DC73 C9                       RET
                     ;
                     ; MODEM INPUT
                     ;
```

```
DC74 DB14      MIN:    IN      MSTAT    ;CHECK STATUS
DC76 E640              ANI     MIMSK
DC78 CA74DC            JZ      MIN
DC7B DB15              IN      MDATA    ;GET BYTE
DC7D E67F              ANI     7FH      ;MASK PARITY
DC7F C9               RET
                  ;
DC80 31322D            DB      '1-28-80' ;VERSION
                  ;
DC88                  END
```

```
symbol table

00C5 ACONT    00C4 ADATA    00C7 BCONT    00C6 BDATA
D600 BIOS     F400 BUFFER   F406 BUFF     F402 CCNT
0011 CDATA    0001 CIMSK    DBDC CIN3     DC03 CIN4
DC01 CIN5     0002 COMSK    DBD3 CONIN    DC12 CONOUT
DBAB CONST    DC1B CONW     F400 CPNTR    000D CR
0010 CSTAT    0003 CTRC     0004 CTRD     0011 CTRQ
0013 CTRS     FFFF DOUBLE   0000 FALSE    000C FFEED
DC38 FORM     DB15 INIT     FFFF INTRM    0003 IOBYTE
F403 KCNT     DB92 KEY2     DB7F KEY3     DB6C KEY4
DB91 KEY5     DB95 KEY6     DB5B KEYBD    F404 KPNTR
0013 LDATA    0005 LEV      000A LF       0001 LIMSK
DC06 LIN      DBCB LISST    DC2E LIST     0000 LNULL
0002 LOMSK    DC26 LOUT     DC3F LSKIP    0012 LSTAT
0015 MDATA    0040 MIMSK    DC74 MIN      DC5E MODCR
0080 MOMSK    DC69 MOUT     0036 MSIZE    0014 MSTAT
4900 OFFSET   DC48 PUNCH    DBC8 QUIT     DB9B RSETP
DB00 START    0095 STOP     FFFF TRUE     DB00 USER
```

entry is read with an IN instruction. The byte is then placed into the keyboard buffer and the buffer pointer and buffer count are both incremented. The interrupt flip-flop is enabled with an EI instruction, then the computer returns to its previous task.

When the CPU needs another byte, it gets it from the keyboard buffer in memory, rather than from the keyboard itself. The instructions starting at subroutine CONIN perform this step. The separate buffer pointer and buffer count, maintained for the CPU, are both incremented.

The interrupt-driven keyboard can be utilized with most of the CP/M systems programs. For example, if a BASIC interpreter has been loaded and a source program has been entered, then the source program can first be listed, then executed by typing the following two lines.

```
LIST
RUN
```

The second command can be given immediately following the first, even though the first task has not been completed. The second command will not be displayed on the console, however, until the completion of the first task. Therefore, the operator must type carefully.

SCROLL CONTROL AND TASK ABORTION

Data can appear (scroll) too rapidly on a high-speed video screen. With the usual CP/M arrangement, the user can type a Control-S to freeze the video display. Typing any other character will cause scrolling to resume. The interrupt-driven routine given in Listing 4.1 incorporates its own scroll control. Typing a Control-S freezes the screen, just as with the usual CP/M setup. However, scrolling can only be resumed by typing a Control-Q. The two commands, Control-S and Control-Q, are treated distinctly; they are not placed into the input buffer, but are acted upon immediately.

CP/M tasks are normally aborted by typing any keyboard character. On the other hand, a Control-C is required in Microsoft BASIC, and a Control-E is used by Xitan BASIC for aborting the current task. This protocol has been altered so that characters can be entered into the keyboard buffer during a scroll operation. Nevertheless, it may be desirable to abort a task.

If no characters have been typed ahead, that is, if the computer is executing the latest command, then a Control-C command will abort the current operation. Alternatively, if there are characters waiting in the console-input buffer, then these must be flushed out by typing a Control-D. At this point, a Control-C can be typed to abort the task. This arrangement will work with most programs, including Microsoft BASIC and Tarbell BASIC. If you use Xitan BASIC, then you must change the abort command character in the interface routine from a Control-C to a Control-E.

An additional alteration is necessary for the Word-Master text editor. First of all, Word-Master buffers the keyboard buffer using software routines. Consequently, a hardware-interrupt system is unnecessary. Secondly, Word-Master uses Control-C and Control-D for system commands. Control-C is used to display the next screen and Control-D is used to move the cursor to the next word. If you want to use hardware interrupts with Word-Master, you must change the Control-C and Control-D commands in either the interface routine or in Word-Master.

DATA TRANSMISSION BY TELEPHONE

The process of transmitting information between a peripheral and the computer may be simple or it may be complex. If the system console is wired into the computer, or if the computer itself is built into the console, then the integrity of the transmitted data is not likely to be much of a problem. It may be, however, that the console is connected to the computer through a telephone line. The computer may be located across town or across the country. In any case, connection through a telephone line complicates things.

In a typical telephone arrangement, the data is sent from the console by modulating an acoustical carrier for transmission over the telephone line. The conversion is performed by an electronic device called a *modem* (the name is an abbreviation for MODulator-DEModulator). Two modems are required, one at each end of the telephone line. One converts the transmitted

signal to telephone frequencies, the other converts the signal back to the original data.

The modem may also have an *acoustical coupler*. This allows a standard telephone headset to be pressed into two rubber-lined openings in the modem, making a direct connection between the modem and the telephone line unnecessary.

There will usually be two data carrier signals at different frequencies. This allows simultaneous two-way, or *full duplex*, operation. The computer can transmit data to the console on one carrier while the console is transmitting data to the computer on the other carrier.

A microcomputer can produce a more effective link between a console and a large main-frame computer, especially if a relatively slow modem is utilized. A program can be developed using the microcomputer's editor, then the resulting file can be automatically transmitted to the larger computer. A subroutine that can be used to link a microcomputer to a large computer is given in Listing 4.2. This routine can be readily incorporated into the system monitor introduced in Chapter 6.

```
        Listing 4.2 Connection to a large computer

                        ;
                        ; CONNECT TO ANOTHER COMPUTER
                        ; THROUGH PHONE MODEM
                        ; (Z-80 CODE)
                        ;
0014            DSTAT   EQU     14H        ;STATUS
0015            DDATA   EQU     DSTAT+1
0040            DIMSK   EQU     40H        ;INPUT MASK
0080            DOMSK   EQU     80H        ;OUT MASK
                        ;
0004            CTRD    EQU     4          ;^D, COPY
57A1            TYFLG   EQU     STACK+1    ;COPY FLAG
                        ;
5BB3 AF         DEC:    XOR     A          ;ZERO
5BB4 32 57A1            LD      (TYFLG),A  ;RESET COPY
5BB7 DB 14      DECIN:  IN      A,(DSTAT)  ;READY?
5BB9 E6 40              AND     DIMSK
5BBB 28 13              JR      Z,ALTIN    ;NO
5BBD 3A 57A1            LD      A,(TYFLG)  ;COPY FLAG
5BC0 B7                 OR      A          ;TO MEMORY?
5BC1 28 07              JR      Z,DIN5     ;NO
5BC3 CD 5BF1            CALL    DINPUT     ;GET BYTE
5BC6 77                 LD      (HL),A     ;TO MEMORY
5BC7 23                 INC     HL         ;POINTER
5BC8 18 03              JR      DEC2
                        ;
5BCA CD 5BF1    DIN5:   CALL    DINPUT     ;GET BYTE
5BCD CD 5835    DEC2:   CALL    OUTT       ;TO CONSOLE
5BD0 CD 5827    ALTIN:  CALL    INSTAT     ;CONSOLE
5BD3 28 E2              JR      Z,DECIN    ;NOT READY
5BD5 CD 581A            CALL    INPUT2     ;CONSOLE
5BD8 FE 04      ALT2:   CP      CTRD       ;^D
5BDA 28 1A              JR      Z,DCOPY    ;SET FLAG
```

```
5BDC CD 5BE1    ALT5:   CALL    DECOUT  ;TO DEC
5BDF 18 D6              JR      DECIN   ;DEC INPUT
                ;
                ; OUTPUT A BYTE TO DEC
                ;
5BE1 F5         DECOUT: PUSH    AF
5BE2 CD 5BEA            CALL    DORDY
5BE5 F1                 POP     AF
5BE6 D3 15             OUT     (DDATA),A
5BE8 18 CD             JR      DECIN   ;NEXT
                ;
                ; DEC INPUT READY
                ;
5BEA DB 14      DORDY:  IN      A,(DSTAT)
5BEC E6 80             AND     DOMSK
5BEE 28 F1             JR      Z,DECOUT
5BF0 C9                RET
                ;
                ; INPUT FROM DEC MODEM
                ;
5BF1 DB 15      DINPUT: IN      A,(DDATA)
5BF3 E6 7F             AND     DEL     ;MASK PARITY
5BF5 C9                RET
                ;
                ; SET DEC COPY FLAG, START COPYING
                ; INTO MEMORY AT 100 HEX
                ;
5BF6 21 0100    DCOPY:  LD      HL,100H
5BF9 3E 01             LD      A,1
5BFB 32 57A1           LD      (TYFLG),A
5BFE 18 B7             JR      DECIN
                ;
                        END     START
```

PARITY CHECKING

Parity checking provides a method of monitoring the integrity of data transmission. While there are several different schemes for digitally encoding the common characters, the ASCII method is frequently used for microcomputers. The ASCII code, shown in Appendix A, requires only seven bits for each character. Since each byte of data contains eight bits, there is one bit available for use as a check bit.

Consider the 7-bit pattern for the ASCII characters 2 and 3.

ASCII 2   011 0010
ASCII 3   011 0011

The value of 2 is encoded with four logical zero bits and three logical 1 bits. The value of 3 is encoded with three logical zero bits and four logical 1 bits. A parity check can be obtained by including an additional bit on the left (high-order) end.

There are two common methods of generating the parity bit. One encoding method is called *even parity*. In this case, a leading zero bit is added if there are an even number of logical ones among the other seven bits. On the other hand, the parity bit would be a logical 1 if there are an odd number of logical ones among the other seven bits. With even parity coding, the ASCII characters 2 and 3 would look like this.

$$2 \quad 1011\ 0010$$
$$3 \quad 0011\ 0011$$

Now the 8-bit representation of both the 2 and the 3 contains an even number of logical ones (and an even number of logical zeros).

An alternate approach is called *odd parity*. In this case, the operation is simply the inverse of even parity. The logic of the parity bit is chosen so that the resulting bit pattern contains an odd number of logical ones. Either even or odd parity encoding will provide a check on the integrity of the data transmission.

Suppose that during transmission of the character 2, the rightmost bit became inverted. The console sent the even-parity bit pattern

1011 0010

but the computer received the bit pattern

1011 0011

A parity check, performed at the computer, would be able to detect the fact that there was an error.

A typical console-input routine might look like this.

```
CONIN:  IN      CMASK   ;CHECK STATUS
        ANI     CIMSK   ;MASK FOR INPUT
        JZ      CONIN   ;LOOP UNTIL READY
        IN      CDATA   ;GET THE DATA
        ANI     7FH     ;REMOVE PARITY
        RET
```

The next to the last instruction in this subroutine performs a logical AND with 7F hex. This step is used to remove the high-order bit of the byte since it is not needed for ASCII data. Instead of ignoring this eighth bit, we could use it as a parity check. An input routine to perform a check for parity looks like the following list.

```
CONIN:  IN      CMASK   ;CHECK STATUS
        ANI     CIMSK   ;MASK FOR INPUT
        JZ      CONIN   ;LOOP UNTIL READY
        IN      CDATA   ;GET THE DATA
        ORA     A       ;SET PARITY FLAG
        JPO     PERROR  ;PARITY ERROR
        ANI     7FH     ;REMOVE PARITY
        RET
;
; PARITY-ERROR MESSAGE
;
PERROR: . . .
```

This routine is essentially the same as the one given immediately before, but after the data register has been read by the computer, the parity of the byte is determined.

The ORA A instruction performs a logical OR of the accumulator with itself. A logical OR of any byte with itself will not change the byte. However, it does affect the status flags in this case. After the OR operation, the parity flag will be set according to the parity of the accumulator. If the parity is found to be odd, then an error is present. The JPO instruction causes a jump to the parity-error routine in this case. However, if the parity is found to be even, then the byte in the accumulator does not contain a parity error.

Notice that a parity check will not detect an even number of bit errors in a byte. There may be two, four, or six errors, and the parity check will not detect an error. This is not likely to be a practical problem, however, since the likelihood of two errors is much less than the likelihood of single errors.

ASCII computer terminals usually have the ability to automatically transmit an eighth parity bit with the data. Furthermore, there will typically be a user-selectable switch for choosing either even or odd parity. There may also be the additional choices of always resetting or always setting the parity bit. The input routine can check for odd parity if the JPO instruction is changed to a JPE instruction.

There are much more sophisticated methods of checking for transmission errors. One of these is the checksum approach discussed in Chapter 9. With this method, the transmitted data are added together. At regular intervals, the sum, or its complement, is transmitted along with the data. When the data are decoded, the data are added up again and compared to the checksum.

The Hamming error-correction code is even better than the checksum method. It not only detects errors, but can also correct them. In the end, however, it is wise to find out why errors occur, and to take the appropriate action to correct the problem. A dirty tape head, for example, can produce errors. Cleaning the head is better than relying on an error-correction scheme.

CHAPTER FIVE

Macros

Sophisticated assemblers incorporate a macro processor. A macro is used to define a set of instructions which are associated with the macro name. Then whenever the macro name appears in the source program, the assembler substitutes the corresponding instructions. This is called a *macro expansion.*

Suppose that we want to interchange the contents of two memory locations with the following instructions.

```
LDA     FIRST   ;GET FIRST BYTE
PUSH    PSW     ;SAVE
LDA     SECOND  ;GET SECOND
STA     FIRST   ;PUT INTO FIRST
POP     PSW     ;GET FIRST
STA     SECOND  ;PUT INTO SECOND
```

This set of instructions can be defined in a macro called SWAP.

```
SWAP    MACRO           ;SWAP FIRST AND SECOND
        LDA     FIRST   ;GET FIRST BYTE
        PUSH    PSW     ;SAVE
        LDA     SECOND  ;GET SECOND
        STA     FIRST   ;PUT INTO FIRST
        POP     PSW     ;GET FIRST
        STA     SECOND  ;PUT INTO SECOND
        ENDM
```

The macro definition is placed near the top of the assembler source program. The first line defines the macro name; the last line terminates the definition. The name SWAP can now be used like an operation code. it is placed in the source program whenever the corresponding instructions are needed. When the assembler encounters the name SWAP, it substitutes the desired

instructions. The final binary code generated by the assembler is the same as it would be if the instructions had originally been entered into the source program.

Each time the macro name SWAP appears in the source program, the same set of instructions will be generated and the same two memory locations will be interchanged. The SWAP macro becomes more versatile if the memory locations can be changed. If the names of the memory locations are placed on the first line of the macro definition, they become dummy variables.

```
SWAP     MACRO     FIRST, SECOND
         LDA       FIRST    ;GET 1ST BYTE
         PUSH      PSW      ;SAVE
         LDA       SECOND   ;GET 2ND
         STA       FIRST    ;PUT INTO 1ST
         POP       PSW      ;GET 1ST
         STA       SECOND   ;PUT INTO 2ND
         ENDM
```

The actual parameters in the macro call are substituted for the dummy parameters at assembly time. The macro call

```
SWAP     HIGH, LOW
```

generates the assembly language instructions

```
LDA      HIGH     ;GET 1ST BYTE
PUSH     PSW      ;SAVE
LDA      LOW      ;GET 2ND
STA      HIGH     ;PUT INTO 1ST
POP      PSW      ;GET 1ST
STA      LOW      ;PUT INTO 2ND
```

The statement

```
SWAP     LEFT, RIGHT
```

will produce the instructions

```
LDA      LEFT     ;GET 1ST BYTE
PUSH     PSW      ;SAVE
LDA      RIGHT    ;GET 2ND
STA      LEFT     ;PUT INTO 1ST
POP      PSW      ;GET 1ST
STA      RIGHT    ;PUT INTO 2ND
```

The structure of macros can be much more complicated than the above examples. One macro can be nested inside another.

```
OUTER     MACRO
          . . .
          IF      FAST
INNER     MACRO
          . . .
          . . .
          ENDM              ;;INNER
          . . .
          ENDIF             ;;FAST
          . . .
          ENDM              ;;OUTER
```

Conditional assembly directives can be used to create different versions. Comments in the macro definition which begin with a single semicolon are reproduced in the macro expansion along with the op codes. But if the comments are preceded by two consecutive semicolons, then they will appear only in the macro definition, not in the macro expansion.

GENERATING THREE OUTPUT ROUTINES WITH ONE MACRO

A subroutine can be used whenever a set of instructions is needed at several places in a program. But there are times when a similar but different group of instructions is needed. A subroutine cannot be used in this case. Consider the three 8080 output routines that follow. The first sends a byte to the console, the second sends a byte to the list device, and the third sends a byte to the phone modem.

```
COT:      IN      CSTAT
          ANI     COMSK
          JZ      COT
          MOV     A,C
          OUT     CDATA
          RET
;
LOT:      IN      LSTAT
          ANI     LOMSK
          JZ      LOT
          MOV     A,C
          OUT     LDATA
          RET
;
MOT:      IN      MSTAT
          ANI     MOMSK
          JNZ     MOT
          MOV     A,C
          OUT     MDATA
          RET
```

The structure of these three routines is very similar. Each begins by reading the appropriate status register. Then a logical AND is performed to select the output-ready bit. Looping occurs until the peripheral is ready. The byte is moved from the C register into the accumulator and sent to the appropriate peripheral. Finally, a return instruction is executed.

These three routines are slightly different, hence they cannot be replaced by a single subroutine. However, since they have similar structure they can be generated with a macro. The macro definition looks like this.

```
OUTPUT   MACRO   ?S,?Z   ;OUTPUT ROUTINES
?S&OT:   IN      ?S&STAT ;CHECK STATUS
         ANI     ?S&OMSK ;MASK FOR OUTPUT
         J&?Z    ?S&OT   ;NOT READY
         MOV     A,C     ;GET BYTE
         OUT     ?S&DATA ;SEND IT
         RET
         ENDM
```

It would appear near the beginning of the source program. The macro name chosen is OUTPUT and the two dummy arguments are ?S and ?Z. Dummy arguments can have the same form as any other identifier. A question mark was chosen as the first character so that the dummy arguments would be easier to find in the macro definition. You must be careful not to use register names such as A, B, H, or L for dummy arguments if these register names also appear in the macro.

Each of the three output routines is generated by a one-line macro call.

```
     OUTPUT  C,Z      ;CONSOLE OUTPUT
;
     OUTPUT  L,Z      ;LIST OUTPUT
;
     OUTPUT  M,NZ     ;MODEM OUTPUT
```

Each line includes the appropriate parameters. At assembly time, the real arguments replace the dummy arguments of the macro. The ampersand character (&) is a concatenation operator. It separates a dummy argument from additional text. The macro processor substitutes the real parameter for the dummy argument, then joins it to the rest of the text. By this means the expression ?S&OT becomes LOT if the real argument is the letter L.

Macro assemblers may give the user three options for the assembly listing:

1. Show the macro call, the generated source line, and the resultant hex code.
2. Show the macro call and the hex code.
3. Show only the macro call.

If option 1 is chosen, then the above three macro calls to OUTPUT will produce the following.

```
                          OUTPUT    MACRO     ?S,?Z     ;OUTPUT ROUTINES
                          ?S&OT:    IN        ?S&STAT   ;CHECK STATUS
                                    ANI       ?S&OMSK   ;MASK FOR OUTPUT
                                    J&?Z      ?S&OT     ;NOT READY
                                    MOV       A,C       ;GET BYTE
                                    OUT       ?S&DATA   ;SEND IT
                                    RET
                                    ENDM
                      ;
                          OUTPUT    C,Z       ;CONSOLE OUTPUT
      4000+DB10           COT:      IN        CSTAT     ;CHECK STATUS
      4002+E602                     ANI       COMSK     ;MASK FOR OUTPUT
      4004+CA0040                   JZ        COT       ;NOT READY
      4007+79                       MOV       A,C       ;GET BYTE
      4008+D311                     OUT       CDATA     ;SEND IT
      400A+C9                       RET
                      ;
                          OUTPUT    L,Z       ;LIST OUTPUT
      400B+DB12           LOT:      IN        LSTAT     ;CHECK STATUS
      400D+E602                     ANI       LOMSK     ;MASK FOR OUTPUT
      400F+CA0B40                   JZ        LOT       ;NOT READY
      4012+79                       MOV       A,C       ;GET BYTE
      4013+D313                     OUT       LDATA     ;SEND IT
      4015+C9                       RET
                      ;
                          OUTPUT    M,NZ      ;MODEM OUTPUT
      4016+DB14           MOT:      IN        MSTAT     ;CHECK STATUS
      4018+E680                     ANI       MOMSK     ;MASK FOR OUTPUT
      401A+C21640                   JNZ       MOT       ;NOT READY
      401D+79                       MOV       A,C       ;GET BYTE
      401E+D315                     OUT       MDATA     ;SEND IT
      4020+C9                       RET
```

The first argument in the macro, ?S, is replaced by the actual argument. This
is the letter C in the first call, the letter L in the second call, and the letter M
in the third call. The second argument is used to select a JZ or JNZ instruc-
tion for the third line of the macro expansion.

Some assemblers automatically remove the ampersand symbol from the
resultant assembly listing. Others leave the symbol in place. In this latter
case, the first line of the first routine would look like this.

```
    C&OT:    IN       C&STAT   ;CHECK STATUS
```

But this is a matter of style. The actual machine code generated is the same
in either case.

GENERATING Z-80 INSTRUCTIONS WITH AN 8080 ASSEMBLER

If you have a Z-80 CPU but an 8080 macro assembler, such as the Digital
Research MAC, you can run all of the 8080 programs just as they are given
in this book. You can also do the Z-80 programs by using macros to generate
the Z-80 instructions. For some of the instructions, the regular Zilog mne-
monic can be used. For other instructions a slightly different format is

necessary. Consider, for example, the Z-80 instruction that performs a two's complement on the accumulator. The Zilog mnemonic for this operation is NEG. A Z-80 assembler converts this mnemonic into the two hex bytes ED 44. With an 8080 macro assembler you can use the same mnemonic. Define the macro

```
NEG      MACRO    ; TWO'S COMPLEMENT
         DB       0EDH, 44H
         ENDM
```

Then, the macro call

```
NEG
```

is placed in the source program when the Z-80 NEG instruction is needed. The 8080 macro assembler will insert the desired hex bytes ED 44 at this point.

As another example, consider the Z-80 relative-jump instruction. This instruction can be implemented with a macro that uses the assembler's program counter, a dollar sign. The macro definition looks like this.

```
JR       ADDR     ;RELATIVE JUMP
         DB       18H, ADDR-$-1
         ENDM
```

The dummy parameter ADDR is the destination address of the jump. The macro call

```
JR       ERROR
```

will generate the correct Z-80 code. The first byte will be 18 hex. The second byte will be the required displacement for the jump.

The Z-80 instruction, DJNZ, can be generated in a similar way. This instruction decrements the B register and jumps relative to the address of the argument if the zero flag is not set. The macro definition is

```
DJNZ     MACRO    ADDR
         DB       10H,ADDR-$-1
         ENDM
```

and the macro call looks like

```
DJNZ     LOOP
```

This approach will work with most macro assemblers. There may be a problem, however, with the interpretation of the dollar sign. This symbol usually refers to the address of the beginning of the current instruction. But for some assemblers, it is interpreted as the address of the following instruction.

If your assembler uses the latter interpretation, you will have to change the macro accordingly. If in doubt, check the user manual.

Some Z-80 mnemonics are not compatible with the macro format. For example, the Z-80 instruction

```
PUSH    IX
```

cannot be generated with a macro called

```
PUSH    MACRO    REG
```

since PUSH is a regular 8080 mnemonic. One possibility is to name the macro PUSHIX instead.

```
PUSHIX  MACRO
        DB      0DDH,0E5H
        ENDM
```

Similar problems occur with the commands POP IX, ADD IX,BC, SUB (IX+dis), and SET. A format that is different from the Z-80 mnemonic must be chosen in each of these cases.

The Digital Research macro assembler has an added bonus. Frequently-used macros can be placed into a separate macro library and given the file extension of LIB. In fact, this assembler is supplied with a macro library called Z80.LIB that will generate all of the Z-80 instructions. The statement

```
MACLIB  Z80
```

is placed near the beginning of the regular source program. The assembler will then look in the file Z80.LIB for the required macros.

EMULATING Z-80 INSTRUCTIONS WITH AN 8080 CPU

The Z-80 CPU can execute many powerful instructions that are not available to the 8080. Some of these useful instructions are difficult to implement on an 8080, while others are simply combinations of regular 8080 instructions. The NEG instruction is one of the easiest to implement. The macro definition is

```
NEG     MACRO           ;8080 TWO'S COMPLEMENT
        CMA             ;;1'S COMPLEMENT
        INR     A       ;;2'S COMPLEMENT
        ENDM
```

Now, whenever a two's complement is needed, the macro call

```
NEG
```

is placed into the program. The assembler generates the required 8080
mnemonics

```
CMA
INR     A
```

Another useful Z-80 operation is the arithmetic shift. This operation
shifts all bits of a register one position to the left. The high-order bit is
moved into carry, that is, the carry flag is set to a 1 if bit 7 was originally a
value of 1. The carry flag is reset to zero if bit 7 was zero. A value of zero is
placed into the low-order bit (bit zero).

The 8080 instruction ADD A, which adds the value in the accumulator
to itself, performs the arithmetic shift left. But for the 8080, this is the only
register which can perform the shift. The Z-80 has an additional instruction
which allows this operation to be performed on any of the general-purpose,
8-bit registers or on the memory byte referenced by HL, IX, or IY.

The following macro will generate a set of 8080 instructions for the
arithmetic shift left operation.

```
SLA     MACRO   REG     ;SHIFT LEFT ARITH
        MOV     A,REG   ;;GET BYTE
        ADD     A       ;;SHIFT LEFT
        MOV     REG,A   ;;PUT BACK
        ENDM
```

The byte is first moved to the accumulator. The next step is to add the
accumulator to itself. This doubling operation performs the needed shift
into carry. Then the result is returned to the original register. The value in
register C can be doubled by inserting the macro call

```
SLA     C
```

This macro must be used with caution, since the accumulator will be
changed during use. But the byte originally in the accumulator cannot be
saved with a PUSH PSW instruction. The problem is that the subsequent
POP PSW command will overlay the flag register, so that the carry result of
the shift will be lost. One solution is to save the accumulator in memory.

```
SLA     MACRO   REG     ;SHIFT LEFT ARITH
        STA     SAVE    ;;SAVE A
        MOV     A,REG   ;;GET BYTE
        ADD     A       ;;SHIFT LEFT
        MOV     REG,A   ;;PUT BACK
        LDA     SAVE    ;;RESTORE A
        ENDM
```

THE REPEAT MACROS

There are times when several lines of identical or nearly identical lines of code are needed. Three repeat macros, REPT, IRP, and IRPC are provided for this purpose. The repeat macros differ from the regular macros in that they are placed directly into the source program where they are needed. The macro definition is the macro call. In the simplest form, an instruction or group of instructions can be replicated. The expression

```
REPT    4
RAR
ENDM
```

will generate the four lines

```
RAR
RAR
RAR
RAR
```

By using the SET directive, this operation can become more versatile. The SET instruction is like an EQU except that the value can be redefined. The lines

```
ADDR    SET     8000H
        REPT    4
ADDR    SET     ADDR+3
        DW      ADDR
        ENDM
```

will generate the code corresponding to

```
DW      8003H
DW      8006H
DW      8009H
DW      800CH
```

Such a series could refer to jump vectors that are spaced three bytes apart.

The repeat macro, combined with the conditional-assembly directive, can generate the required number of nulls after a carriage-return, line-feed pair. This will give the printer time to return to the left margin. Some printers need no nulls, whereas others may need as many as six or seven. The source code could be

```
;
; OUTPUT TO LIST DEVICE
;
LOUT:   IN      LSTAT
        ANI     LOMSK
        JZ      LOUT
        MOV     A,C     ;GET DATA
        OUT     LDATA   ;SEND BYTE
```

```
;
              IF      NULLS > 0
              ANI     7FH       ;REMOVE PARITY
              CPI     CR        ;CARRIAGE RETURN?
              RNZ               ;NO
              MVI     C,0       ;GET A NULL
;
              REPT    NULLS     ;HOW MANY?
              CALL    LOUT      ;SEND NULL
              ENDM              ;REPEAT MACRO
              ENDIF             ;NULLS
;
              RET
```

The first part is a typical output subroutine. A call is made with the byte in register C. When the output device is ready, the byte is moved from the C register to the accumulator. It is then sent to the printer. If no nulls are required, then the passage from

```
    IF      NULLS > 0
```

to

```
    ENDIF
```

is not assembled. On the other hand, if nulls are required, then this passage is assembled. If four nulls are needed, then the assembler will generate four lines of

```
    CALL   LOUT      ;SEND NULL
```

The list output routine calls itself to produce the required nulls. The identifier called NULLS must be previously set to the necessary number of nulls.

There are two other repeat macros called IRP and IRPC. A set of one-character message routines can be generated by using the indefinite repeat macro IRPC. This example will introduce something called a programming trick. Some people think that it is a horrible example of programming. Others think it is very clever. Its purpose is to save two bytes of instruction each time it is used. In addition, less branching is required.

Suppose that we need five different message routines that each produce a single character. The instructions might look like

```
    CHARC:  MVI     A,'C'
            JMP     OUTT
    CHARM:  MVI     A,'M'
            JMP     OUTT
    CHARR:  MVI     A,'R'
            JMP     OUTT
    CHAR?:  MVI     A,'?'
            JMP     OUTT
    CHAR$:  MVI     A,'$'
            JMP     OUTT
            . . .
    OUTT:   <output routine>
```

If the B and C registers are not in use, we can shorten the above passage by replacing each line containing the instruction JMP OUTT with a line of DB 1.

```
CHARC:   MVI     A,'C'
         DB      1
CHARM:   MVI     A,'M'
         DB      1
CHARR:   MVI     A,'R'
         DB      1
CHAR?:   MVI     A,'?'
         DB      1
CHAR$:   MVI     A,'$'
;
OUTT:    . . .
```

Let's see how this works. Suppose that a branch is made to the label CHARC. The accumulator is loaded with an ASCII letter C. The next byte, a DB 1, looks like the start of an LXI B instruction. The following two bytes, corresponding to the MVI A,'M' instruction, will be interpreted as the argument for the LXI instruction. That is, they will be considered as data. The same will hold for the other occurrences of DB 1. By this means, we have effectively shortened the code. We no longer need the JMP statements. Caution: a disassembler is not likely to interpret this passage correctly. It looks like there are labels pointing into the middle of the LXI instructions. Notice that the second version has subroutine OUTT positioned directly under the CHAR$ routine, so that no JMP instruction is needed at this point.

The second version can be easily generated with the IRPC macro. Only five lines are needed in the source program.

```
         IRPC    X,CMPR?$
         DB      1           ;FAKE LXI B
CHAR&X:  MVI     A,'&X'
         ENDM
```

The five different message routines are all generated with this single macro. One replication is made for each character of the second argument to IRPC.

PRINTING STRINGS WITH MACROS

Suppose that we want to send messages to the console from various points of a program. We could write a subroutine called SENDM for this purpose.

```
SENDM:   LDAX    D           ;GET CHAR
         ORA     A           ;ZERO?
         RZ                  ;YES
         INX     D           ;POINTER
         MOV     C,A
         CALL    OUTT        ;SENT
         JMP     SENDM       ;NEXT
```

The address of the message is loaded into the DE register and subroutine SENDM is called.

```
LXI      D,MESS1
CALL     SENDM
```

Subroutine SENDM prints a message by sending each character to the output subroutine OUTT. When a binary zero, used to indicate the end of the message, is found, SENDM returns to the calling program.

We can simplify the sending of messages by using a macro called PRINT. At each point we write

```
PRINT    <CHECKSUM ERROR>
 .  .  .
PRINT    <END OF FILE>
 .  .  .
PRINT    <OUTPUT TO LIST?>
```

The macro called PRINT will generate the message given in the argument. The message is enclosed in angle brackets because the blanks are part of the argument.

If subroutine SENDM were placed into the macro body, then one copy of SENDM would be inserted for each occurrence of the PRINT statement. But we don't need more than one copy of SENDM. On the other hand, if we don't include SENDM in the macro, there may not be any copies at all. What we need is a mechanism for inserting one, and only one, copy of SENDM regardless of how many times we give the PRINT command.

The solution is to write a double macro—one nested inside the other. Both macros will be given the same name. Subroutine SENDM will be part of the outer macro which will be expanded only once. The layout looks like this.

```
PRINT    MACRO    <message>  ;OUTER MACRO
         .  .  .
         [define SENDM]
         .  .  .
PRINT    MACRO    <message>  ;INNER MACRO
         .  .  .
         [send message]
         .  .  .
         ENDM               ;INNER MACRO
         .  .  .
         ENDM               ;OUTER MACRO
```

The source program in Listing 5.1 demonstrates this technique. The outer macro PRINT has the argument ?TEXT, used for the first call to the macro. Subroutine SENDM is generated at this time. Additional macro calls to PRINT utilize the inner macro which has the argument ?TEXT2. Subroutine SENDM is not generated on these subsequent calls.

Listing 5.1. Source listing for a macro
                demonstration program.

```
;
PRINT   MACRO     ?TEXT
        LOCAL     AROUND
;
        JMP       AROUND   ;SENDM
;
; SUBROUTINE TO SEND A STRING TO
; THE CONSOLE. BINARY ZERO AT STRING END.
; D,E IS STRING POINTER.
;
SENDM:  LDAX      D        ;GET CHAR
        ORA       A        ;ZERO?
        RZ                 ;YES
        INX       D        ;POINTER
        MOV       C,A
        CALL      OUTT     ;SENT
        JMP       SENDM    ;NEXT
;
AROUND:
;
; REDEFINE THE MACRO
;
PRINT   MACRO     ?TEXT2
        LOCAL     MESG,CONT
;
        PUSH      D        ;SAVE D,E
        LXI       D,MESG   ;POINT
        CALL      SENDM
        POP       D        ;RESTORE
        JMP       CONT     ;SKIP MESSAGE
;
MESG:
        DB        CR,LF,'&?TEXT2',0
;
CONT:   ENDM               ;INNER MACRO
        PRINT     <?TEXT>
        ENDM               ;OUTER MACRO
;
CSTAT   EQU       10H      ;CONSOLE STATUS
CDATA   EQU       CSTAT+1  ;CONSOLE DATA
CR      EQU       13       ;CARRIAGE RETURN
LF      EQU       10       ;LINE FEED
;
ORG     100H
START:
        PRINT     <CHECKSUM ERROR.>
;
        PRINT     <END OF FILE.>
;
        PRINT     <OUTPUT TO LIST?>
        JMP       0        ;RETURN TO CP/M
;
; SEND CHARACTER IN C TO THE CONSOLE
;
```

```
OUTT:   IN      CSTAT
        ANI     2
        JZ      OUTT
        MOV     A,C
        OUT     CDATA
        RET
;
        END
```

Subroutine SENDM is coded into the main flow of the program, that is, it is an inline routine. It is therefore necessary to jump around SENDM. Additionally, there must be a branch around each of the messages, since they too are coded inline. Labels for the required branches are uniquely generated in the macro by declaring the corresponding labels as LOCAL. The resulting assembly listing is given in Listing 5.2. The assembler places plus symbols between the address and the generated code of the assembly listing to designate those lines that were generated by macros. Thus, lines that contain plus symbols were not present in the original source listing.

```
Listing 5.2. Assembly listing for a macro
            demonstration program.
        ;
        PRINT   MACRO   ?TEXT
                LOCAL   AROUND
        ;
                JMP     AROUND  ;SENDM
        ;
        ; SUBROUTINE TO SEND A STRING TO
        ; THE CONSOLE. BINARY ZERO AT STRING END.
        ; D,E IS STRING POINTER.
        ;
        SENDM:  LDAX    D       ;GET CHAR
                ORA     A       ;ZERO?
                RZ              ;YES
                INX     D       ;POINTER
                MOV     C,A
                CALL    OUTT    ;SENT
                JMP     SENDM   ;NEXT
        ;
        AROUND:
        ;
        ; REDEFINE THE MACRO
        ;
        PRINT   MACRO   ?TEXT2
                LOCAL   MESG,CONT
        ;
                PUSH    D       ;SAVE D,E
                LXI     D,MESG  ;POINT
                CALL    SENDM
                POP     D       ;RESTORE
                JMP     CONT    ;SKIP MESSAGE
        ;
        MESG:
                DB      CR,LF,'&?TEXT2',0
        ;
```

```
                    CONT:   ENDM                    ;INNER MACRO
                            PRINT   <?TEXT>
                            ENDM                    ;OUTER MACRO
                        ;
0010 =              CSTAT   EQU     10H             ;CONSOLE STATUS
0011 =              CDATA   EQU     CSTAT+1 ;CONSOLE DATA
000D =              CR      EQU     13              ;CARRIAGE RETURN
000A =              LF      EQU     10              ;LINE FEED
                        ;
0100                ORG     100H
                    START:
                            PRINT   <CHECKSUM ERROR.>
0100+C30E01                 JMP     ??0001  ;SENDM
0103+1A             SENDM:  LDAX    D       ;GET CHAR
0104+B7                     ORA     A       ;ZERO?
0105+C8                     RZ              ;YES
0106+13                     INX     D       ;POINTER
0107+4F                     MOV     C,A
0108+CD6501                 CALL    OUTT    ;SENT
010B+C30301                 JMP     SENDM   ;NEXT
010E+D5                     PUSH    D       ;SAVE D,E
010F+111901                 LXI     D,??0002 ;POINT
0112+CD0301                 CALL    SENDM
0115+D1                     POP     D       ;RESTORE
0116+C32B01                 JMP     ??0003  ;SKIP MESSAGE
0119+0D0A434845             DB      CR,LF,'CHECKSUM ERROR.',0
                        ;

                            PRINT   <END OF FILE.>
012B+D5                     PUSH    D       ;SAVE D,E
012C+113601                 LXI     D,??0004 ;POINT
012F+CD0301                 CALL    SENDM
0132+D1                     POP     D       ;RESTORE
0133+C34501                 JMP     ??0005  ;SKIP MESSAGE
0136+0D0A454E44             DB      CR,LF,'END OF FILE.',0
                        ;

                            PRINT   <OUTPUT TO LIST?>
0145+D5                     PUSH    D       ;SAVE D,E
0146+115001                 LXI     D,??0006 ;POINT
0149+CD0301                 CALL    SENDM
014C+D1                     POP     D       ;RESTORE
014D+C36201                 JMP     ??0007  ;SKIP MESSAGE
0150+0D0A4F5554             DB      CR,LF,'OUTPUT TO LIST?',0
0162 C30000                 JMP     0       ;RETURN TO CP/M
                        ;
                        ; SEND CHARACTER IN C TO THE CONSOLE
                        ;
0165 DB10            OUTT:   IN      CSTAT
0167 E602                    ANI     2
0169 CA6501                  JZ      OUTT
016C 79                      MOV     A,C
016D D311                    OUT     CDATA
016F C9                      RET
                        ;
0170                        END
```

If you are familiar with the operation of your assembler, type up the demonstration program and try it out. Branch to the beginning and three messages will appear at the console.

```
Checksum error
End of file
Output to list?
```

Assembler operation will be considered in the next chapter.

By constructing increasingly complicated macros, it is possible to develop some of the structure that is characteristic of higher-level languages such as Pascal. The common loop constructions

```
REPEAT
 • • •
 • • •
UNTIL    <condition true>
```

and

```
LOOP
 • • •
EXITIF   <condition true>
 • • •
ENDLOOP
```

can be realized with macros called REPEAT, UNTIL, and so on. The arguments to UNTIL and EXITIF will consist of three terms. The first and third will be numeric values. The middle term will represent a logical operation such as EQUALS or LESS THAN. The spelling of the logical operators in this case will have to be unusual, since the normal spellings

```
EQ
LT
GE
```

are already utilized by the macro assembler. Macros for all of the common structures are available commercially. Also, source programs for structured macros of this type may be given in the instruction manual for your macro assembler.

CHAPTER SIX

Development of
a System Monitor

The best way to learn assembly language programming is to actually do it. Consequently, in this chapter you will develop a small but very powerful utility program called a *monitor*. There are many useful things that can be done with the monitor. There is a command to examine memory and another to change it. Other commands deal with memory blocks. These allow you to move a block from one location to another. Some of the features will duplicate those found in other programs, but other features, such as a search routine and a memory test routine, will be unique.

You will not program the entire monitor at one time. Instead, you will start with just the bare essentials. You will check the monitor after each major change to ensure that the new features have been added correctly. With this so-called top-down method, any error that develops is likely to be found in the most recently added instructions. As new features are incorporated, the monitor will increase in size until it reaches 1K bytes. This is a size that can be easily programmed into a single ROM. The monitor will then be immediately available as soon as the computer is turned on.

An editor and an assembler are required for the development of the monitor. In addition, a debugger will be helpful if you have problems along the way. Each phase of the development will require the same sequence of steps.

1. Generate an assembly language source file with the editor.
2. Assemble the source program to produce an object file.
3. Compare the hex code from your assembly listing to the listing given in this chapter.
4. Load the object program into memory.
5. Branch to the monitor and try it out.

The assembly listings given in this chapter are written with 8080 mne-monics. You can use an 8080 assembler for these programs whether you have an 8080 or a Z-80 CPU. The resulting code will run on both an 8080 and a Z-80 CPU. If you have only a Z-80 assembler, you will have to change the mnemonics. The cross-reference between the 8080 and Z-80 mnemonics, given in Appendix G, can be used to find the corresponding instructions. Alternately, you can define the 8080 mnemonics as macros.

PROGRAM DEVELOPMENT DETAILS

This section describes the details of program development. Skip to the next section if you are familiar with the operation of your editor and assembler. An editor is needed to create and alter the assembly language source file. If you have CP/M, you will have an editor called ED. Other editors, such as ED-80, EDIT80, and Word-Master, are separately available.

The session begins by giving the name of the editor and the name of the source program. The following discussion assumes that you have CP/M. If you have some other operating system, the approach will be similar, but the details may differ. Put the CP/M system diskette in drive A and a working diskette in drive B if you have more than one drive. Go to drive B with the command

    A>B:

The response will be

    B>

Type the name of the editor followed by the name of the monitor source program. The command line might look like this.

    B>A:ED MON1.ASM

for the first version. The digit 1 in the filename refers to the version number. The file type is ASM for the Digital Research assemblers ASM and MAC. The file type should be chosen as MAC, however, if the Microsoft assembler is used.

As you type the source program, be careful to include only the instructions and the comments shown in Listing 6.1A. Do not type the resulting hex code that is also given at the beginning of each line. For example, the line that defines the parameter TOP, on the first page of the listing, should be typed as

    TOP   EQU   24   ;MEMORY TOP, K BYTES

rather than as:

```
0018 =   TOP     EQU     24      ;MEMORY TOP, K BYTES
```

Type a Control-I or tab to automatically generate the blank spaces between symbols.

Most of the assembly language symbols have five or fewer characters. This is acceptable to many assemblers. However, if your assembler only allows names to have a maximum of five characters, then several symbols will have to be shortened. The TITLE directive, on the first line, is another potential problem. The CP/M version is shown. The apostrophes should be removed if the Microsoft assembler is utilized. If the TITLE directive is not available on your assembler, place a semicolon at the beginning of this first line to convert it to a comment.

VERSION 1: THE INPUT AND OUTPUT ROUTINES

Refer to Listing 6.1A. This version will contain only the input and output routines. Generate an assembler source file with the system editor. The following variables will have to be tailored to your particular system.

TOP	(top of usable memory, decimal K)
HOME	(where to return when done)
CSTAT	(console input status address)
CDATA	(console input data address)
CSTATO	(console output status address)
CDATAO	(console output data address)
INMSK	(input-ready mask)
OMSK	(output-ready mask)
BACKUP	(console backspace character)

Normally, CSTATO will be the same as CSTAT, and CDATAO will be the same as CDATA. But if your console input address is different from your console output address, then each can be separately defined. Furthermore, the address of CDATA will typically have a value one larger or smaller than that of CSTAT.

Listing 6.1A. The beginning of a system monitor.

```
                    TITLE     '8080 system monitor, ver 1'
                    ;
                    ; (put today's date here)
                    ;
0018 =              TOP       EQU     24        ;MEMORY TOP, K BYTES
5800 =              ORGIN     EQU     (TOP-2)*1024   ;PROGRAM START
                    ;
5800                ORG       ORGIN
                    ;
                    ;
0000 =              HOME      EQU     0         ;ABORT (VER 1-2)
                    ;HOME     EQU     ORGIN     ;ABORT ADDRESS
0031 =              VERS      EQU     '1'       ;VERSION NUMBER
57A0 =              STACK     EQU     ORGIN-60H
0010 =              CSTAT     EQU     10H       ;CONSOLE STATUS
0011 =              CDATA     EQU     CSTAT+1   ;CONSOLE DATA
0010 =              CSTATO    EQU     CSTAT     ;CON OUT STATUS
0011 =              CDATAO    EQU     CSTATO+1  ;OUT DATA
0001 =              INMSK     EQU     1         ;INPUT MASK
0002 =              OMSK      EQU     2         ;OUTPUT MASK
                    ;
57A0 =              PORTN     EQU     STACK     ;3 BYTES I/O
57A3 =              IBUFP     EQU     STACK+3   ;BUFFER POINTER
57A5 =              IBUFC     EQU     IBUFP+2   ;BUFFER COUNT
57A6 =              IBUFF     EQU     IBUFP+3   ;INPUT BUFFER
                    ;
0008 =              CTRH      EQU     8         ;^H BACKSPACE
0009 =              TAB       EQU     9         ;^I
0011 =              CTRQ      EQU     17        ;^Q
0013 =              CTRS      EQU     19        ;^S
0018 =              CTRX      EQU     24        ;^X, ABORT
0008 =              BACKUP    EQU     CTRH      ;BACKUP CHAR
007F =              DEL       EQU     127       ;RUBOUT
001B =              ESC       EQU     27        ;ESCAPE
00F7 =              APOS      EQU     (39-'0') AND 0FFH
000D =              CR        EQU     13        ;CARRIAGE RET
000A =              LF        EQU     10        ;LINE FEED
00DB =              INC       EQU     0DBH      ;IN OP CODE
00D3 =              OUTC      EQU     0D3H      ;OUT OP CODE
00C9 =              RETC      EQU     0C9H      ;RET OP CODE
                    ;
                    START:
5800 C34A58                   JMP     COLD      ;COLD START
5803 C35358         RESTRT:   JMP     WARM      ;WARM START
                    ;
                    ; CONSOLE INPUT ROUTINE
                    ;
5806 CD1658         INPUTT:   CALL    INSTAT    ;CHECK STATUS
5809 CA0658                   JZ      INPUTT    ;NOT READY ***
580C DB11           INPUT2:   IN      CDATA     ;GET BYTE
580E E67F                     ANI     DEL
5810 FE18                     CPI     CTRX      ;ABORT?
5812 CA0000                   JZ      HOME      ;YES
5815 C9                       RET
                    ;
                    ; GET CONSOLE-INPUT STATUS
                    ;
```

```
5816 DB10      INSTAT: IN      CSTAT
5818 E601              ANI     INMSK
581A C9               RET
               ;
               ; CONSOLE OUTPUT ROUTINE
               ;
581B F5        OUTT:   PUSH    PSW
581C CD1658    OUT2:   CALL    INSTAT   ;INPUT?
581F CA3558            JZ      OUT4     ;NO ***
5822 CD0C58            CALL    INPUT2   ;GET INPUT
5825 FE13              CPI     CTRS     ;FREEZE?
5827 C21C58            JNZ     OUT2     ;NO
               ;
               ; FREEZE OUTPUT UNTIL ^Q OR ^X
               ;
582A CD0658    OUT3:   CALL    INPUTT   ;INPUT?
582D FE11              CPI     CTRQ     ;RESUME?
582F C22A58            JNZ     OUT3     ;NO
5832 C31C58            JMP     OUT2
               ;
5835 DB10      OUT4:   IN      CSTATO   ;CHECK STATUS
5837 E602              ANI     OMSK
5839 CA1C58            JZ      OUT2     ;NOT READY ***
583C F1               POP     PSW
583D D311              OUT     CDATAO   ;SEND DATA
583F C9               RET
               ;
5840 0D0A      SIGNON: DB      CR,LF
5842 205665            DB      ' Ver '
5847 3100              DW      VERS
5849 00                DB      0
               ;
               ; CONTINUATION OF COLD START
               ;
584A 31A057    COLD:   LXI     SP,STACK
584D 114058            LXI     D,SIGNON ;MESSAGE
5850 CDE258            CALL    SENDM    ;SEND IT
               ;
               ; WARM-START ENTRY
               ;
5853 215358    WARM:   LXI     H,WARM   ;RETURN HERE
5856 E5                PUSH    H
5857 CDB658            CALL    CRLF     ;NEW LINE
585A CD7758            CALL    INPLN    ;CONSOLE LINE
585D CDCC58            CALL    GETCH    ;GET CHAR
5860 FE44              CPI     'D'      ;DUMP
5862 CA5358            JZ      WARM     ;(VER 1)
               ;      JZ      DUMP     ;HEX/ASCII (2)
5865 FE43              CPI     'C'      ;CALL
5867 CA5358            JZ      WARM     ;(VER 1-2)
               ;      JZ      CALLS    ;SUBROUTINE (3)
586A FE47              CPI     'G'      ;GO
586C CA5358            JZ      WARM     ;(VER 1-2)
               ;      JZ      GO       ;SOMEWHERE (3)
586F FE4C              CPI     'L'      ;LOAD
5871 CA5358            JZ      WARM     ;(VER 1-3)
               ;      JZ      LOAD     ;INTO MEMORY (4)
5874 C35358            JMP     WARM     ;TRY AGAIN
               ;
```

```
                  ; INPUT A LINE FROM CONSOLE AND PUT IT
                  ; INTO THE BUFFER. CARRIAGE RETURN ENDS
                  ; THE LINE. RUBOUT OR ^H CORRECTS LAST
                  ; LAST ENTRY. CONTROL-X RESTARTS LINE.
                  ; OTHER CONTROL CHARACTERS ARE IGNORED
                  ;
5877 3E3E    INPLN:  MVI    A,'>'      ;PROMPT
5879 CD1B58          CALL   OUTT
587C 21A657  INPL2:  LXI    H,IBUFF    ;BUFFER ADDR
587F 22A357          SHLD   IBUFP      ;SAVE POINTER
5882 0E00            MVI    C,0        ;COUNT
5884 CD0658  INPLI:  CALL   INPUTT     ;CONSOLE CHAR
5887 FE20            CPI    ' '        ;CONTROL?
5889 DAA858          JC     INPLC      ;YES
588C FE7F            CPI    DEL        ;DELETE
588E CAC058          JZ     INPLB      ;YES
5891 FE5B            CPI    'Z'+1      ;UPPER CASE?
5893 DA9858          JC     INPL3      ;YES
5896 E65F            ANI    5FH        ;MAKE UPPER
5898 77      INPL3:  MOV    M,A        ;INTO BUFFER
5899 3E20            MVI    A,32       ;BUFFER SIZE
589B B9              CMP    C          ;FULL?
589C CA8458          JZ     INPLI      ;YES, LOOP
589F 7E              MOV    A,M        ;GET CHAR
58A0 23              INX    H          ;INCR POINTER
58A1 0C              INR    C          ;AND COUNT
58A2 CD1B58  INPLE:  CALL   OUTT       ;SHOW CHAR
58A5 C38458          JMP    INPLI      ;NEXT CHAR
                  ;
                  ; PROCESS CONTROL CHARACTER
                  ;
58A8 FE08    INPLC:  CPI    CTRH       ;^H?
58AA CAC058          JZ     INPLB      ;YES
58AD FE0D            CPI    CR         ;RETURN?
58AF C28458          JNZ    INPLI      ;NO, IGNORE
                  ;
                  ; END OF INPUT LINE
                  ;
58B2 79              MOV    A,C        ;COUNT
58B3 32A557          STA    IBUFC      ;SAVE
                  ;
                  ; CARRIAGE-RETURN, LINE-FEED ROUTINE
                  ;
58B6 3E0D    CRLF:   MVI    A,CR
58B8 CD1B58          CALL   OUTT       ;SEND CR
58BB 3E0A            MVI    A,LF
58BD C31B58          JMP    OUTT       ;SEND LF
                  ;
                  ; DELETE PRIOR CHARACTER IF ANY
                  ;
58C0 79      INPLB:  MOV    A,C        ;CHAR COUNT
58C1 B7              ORA    A          ;ZERO?
58C2 CA8458          JZ     INPLI      ;YES
58C5 2B              DCX    H          ;BACK POINTER
58C6 0D              DCR    C          ;AND COUNT
58C7 3E08            MVI    A,BACKUP   ;CHARACTER
58C9 C3A258          JMP    INPLE      ;SEND
                  ;
                  ; GET A CHARACTER FROM CONSOLE BUFFER
                  ; SET CARRY IF EMPTY
```

```
                          ;
58CC E5         GETCH:    PUSH     H         ;SAVE REGS
58CD 2AA357               LHLD     IBUFP     ;GET POINTER
58D0 3AA557               LDA      IBUFC     ;AND COUNT
58D3 D601                 SUI      1         ;DECR WITH CARRY
58D5 DAE058               JC       GETC4     ;NO MORE CHAR
58D8 32A557               STA      IBUFC     ;SAVE NEW COUNT
58DB 7E                   MOV      A,M       ;GET CHARACTER
58DC 23                   INX      H         ;INCR POINTER
58DD 22A357               SHLD     IBUFP     ;AND SAVE
58E0 E1         GETC4:    POP      H         ;RESTORE REGS
58E1 C9                   RET
                          ;
                          ; SEND ASCII MESSAGE UNTIL BINARY ZERO
                          ; IS FOUND. POINTER IS D,E
                          ;
58E2 1A         SENDM:    LDAX     D         ;GET BYTE
58E3 B7                   ORA      A         ;ZERO?
58E4 C8                   RZ                 ;YES, DONE
58E5 CD1B58               CALL     OUTT      ;SEND IT
58E8 13                   INX      D         ;POINTER
58E9 C3E258               JMP      SENDM     ;NEXT
                          ;
58EC                      END
```

If you don't know the addresses of the console status and data registers and you are using the CP/M operating system, there is another approach you can take. You can use the I/O routines in the CP/M BIOS. The disadvantage of this approach is that CP/M must always be in place whenever the monitor is used. The BIOS entry address is given at memory address 1. The console status, input and output addresses are obtained by adding, respectively, 3, 6, and 9 to this address. The following I/O routines in Listing 6.1B can be substituted for the subroutines in Listing 6.1A starting with the label INPUTT and ending with the label OUT2. If this version is utilized, the addresses in the following sections will not agree with your assembly listings.

```
        Listing 6.1B. Alternate I/O routines using CP/M BIOS.

                          ; CONSOLE INPUT ROUTINE USING CP/M BIOS
                          ;
                          INPUTT:
5806 E5         INPUT2:   PUSH     H         ;SAVE REGISTERS
5807 D5                   PUSH     D
5808 C5                   PUSH     B
5809 211558               LXI      H,IN5     ;RETURN ADDRESS
580C E5                   PUSH     H         ;PUT ON STACK
580D 2A0100               LHLD     1         ;BIOS WARM START
5810 110600               LXI      D,6       ;OFFSET TO INPUT
5813 19                   DAD      D         ;ADD IN
5814 E9                   PCHL               ;CALL BIOS
5815 C1         IN5:      POP      B         ;RESTORE REGISTERS
5816 D1                   POP      D
5817 E1                   POP      H
5818 FE18                 CPI      CTRX      ;ABORT?
581A CA0058               JZ       START     ;YES
581D C9                   RET
```

```
                     ; GET CONSOLE-INPUT STATUS USING CP/M
                     ;
  581E E5            INSTAT: PUSH    H         ;SAVE REGISTERS
  581F D5                    PUSH    D
  5820 C5                    PUSH    B
  5821 212D58                LXI     H,ST5     ;RETURN ADDRESS
  5824 E5                    PUSH    H         ;PUT ON STACK
  5825 2A0100                LHLD    1         ;BIOS ENTRY
  5828 110300                LXI     D,3       ;OFFSET TO STATUS
  582B 19                    DAD     D         ;ADD TO ADDR
  582C E9                    PCHL              ;CALL BIOS
  582D C1            ST5:    POP     B         ;RESTORE REGISTERS
  582E D1                    POP     D
  582F E1                    POP     H
  5830 B7                    ORA     A
  5831 C9                    RET
                     ;
                     ; CONSOLE OUTPUT ROUTINE USING CP/M BIOS
                     ;
  5832 F5            OUTT:   PUSH    PSW       ;SAVE BYTE
  5833 CD1E58        OUT2:   CALL    INSTAT    ;INPUT?
  5836 CA4C58                JZ      OUT4      ;NO
  5839 CD0658                CALL    INPUT2    ;GET INPUT
  583C FE13                  CPI     CTRS      ;FREEZE?
  583E C23358                JNZ     OUT2      ;NO
  5841 CD0658        OUT3:   CALL    INPUTT    ;INPUT?
  5844 FE11                  CPI     CTRQ      ;RESUME?
  5846 C24158                JNZ     OUT3      ;NO
  5849 C33358                JMP     OUT2
                     ;
  584C F1            OUT4:   POP     PSW       ;GET BYTE
  584D E5                    PUSH    H         ;SAVE REGISTERS
  584E D5                    PUSH    D
  584F C5                    PUSH    B
  5850 4F                    MOV     C,A       ;MOVE BYTE
  5851 F5                    PUSH    PSW
  5852 215E58                LXI     H,OUT5    ;RETURN ADDRESS
  5855 E5                    PUSH    H         ;PUT ON STACK
  5856 2A0100                LHLD    1         ;BIOS ENTRY
  5859 110900                LXI     D,9       ;OFFSET TO OUTPUT
  585C 19                    DAD     D         ;ADD TOGETHER
  585D E9                    PCHL              ;CALL BIOS
  585E F1            OUT5:   POP     PSW       ;RESTORE REGISTERS
  585F C1                    POP     B
  5860 D1                    POP     D
  5861 E1                    POP     H
  5862 C9                    RET
```

Some of the constants such as PORTN will not be used at this time. However, their inclusion now will simplify things later. There are four occurrences of the dummy instruction

```
    JZ        WARM
```

following the label WARM. Each is followed by an instruction that will be needed later. These latter instructions are preceded by a semicolon so that they will be treated as comments by the assembler.

There are some other matters that may need to be considered. One has to do with the sense of the input and output ready flags. There are three conditional jump instructions based on console-ready flags that display a logical 1 (active high) when ready. If your flags are inverted, that is, they present a logic zero when ready, then the three JZ commands must be changed to JNZ commands. These lines, indicated by three stars in the listing below, should be changed to

```
INPUTT: CALL    INSTAT  ;CHECK STATUS
        JNZ     INPUTT  ;NOT READY ***
        . . .
OUT2:   CALL    INSTAT  ;INPUT?
        JNZ     OUT4    ;NO   ***
        . . .
OUT4:   IN      CSTAT   ;CHECK STATUS
        ANI     OMSK
        JNZ     OUT2    ;NOT READY ***
```

The routine that corrects keyboard errors is programmed for a video console. If you have a console printer instead, change the backspace character to a slash.

```
BACKUP  EQU     '/'     ;CORRECTION
```

This will print a slash when an error is corrected. Otherwise the printer will back up during error correction, overstriking the old character with the new. You may also need to add some nulls after each carriage return. The problem here will be evidenced by missing characters at the beginning of each line. The solution is to place additional instructions in the subroutine called CRLF. Replace the last statement in this routine with the following.

```
CALL    OUTT    ;SEND LINE FEED
XRA     A       ;GET A ZERO
CALL    OUTT    ;SEND NULL
CALL    OUTT    ;AND ANOTHER
. . .
. . .   (one line for each null)
JMP     OUTT    ;LAST NULL
```

The rest of the program can be copied directly as it is. The abort command is a control-X. Initially, the abort address of HOME will be needed to leave the new monitor and return to your regular system. We will change this in version 3 when we will add a routine for branching to any memory address.

If you have a TRS-80 Model I, you won't have a control key. Therefore, you will have to change several of the commands shown in the listing. The original commands follow.

```
CTRH      (Control-H)
TAB       (Control-I)
CTRQ      (Control-Q)
CTRS      (Control-S)
CTRX      (Control-X)
DEL       (DEL/RUB)
ESC       (Escape)
```

After you have finished typing the program, exit from the editor and assemble the source program with the assembler. The command line might be

```
B>A:ASM   MON1
```

or

```
B>A:MAC   MON1
```

for the Digital Research assemblers. These two assemblers will produce two files.

```
MON1.ASM        (assembly listing)
MON1.HEX        (hex code)
```

In addition, MAC will produce a symbol table

```
MON1.SYM        (symbol table)
```

Inspect the hex code given in the assembly listing to see that it matches the corresponding instructions given in this chapter. These 8080 listings have all been generated with the Digital Research assembler MAC. This assembler displays the hex code for 16-bit operands in the usual reverse order. The low-order byte appears first followed by the high-order byte. Thus:

```
CD1B58    means    CALL    581B    and
C38458    means    JMP     5884
```

By contrast, the assembly listing produced by the Microsoft assembler reverses the usual order of the two bytes. The high-order byte is given first; this is followed by the low-order byte. In this case, the listing

```
CD 581B    means    CALL    581B    and
C3 5884    means    JMP     5884
```

The next step is to load the hex program into memory using the debugger. The CP/M command would be

```
B>A:DDT MON1.HEX    or
B>A:SID MON1.HEX
```

Now branch to the beginning of the monitor using the debugger G command.

```
G5800
```

The first thing that the monitor will do is display the version number on the first line and a prompt symbol of > underneath it.

Try out this first version by typing a series of letters and numbers. Each character that is typed should appear (echo) on the console. Try the correction keys. Typing either a control-H (backspace) or the RUB/DEL key should back up the cursor on a video terminal. Type a carriage return. The prompt symbol should appear at the beginning of the next line. If all of the features are working properly, type a control-X to return to your regular system. If something appears to be wrong, carefully compare your assembly listing with the one given in Listing 6.1A. *Don't proceed to the next version until the current one is working.*

VERSION 2: A MEMORY DISPLAY

A provision for examining the contents of memory will now be added. This routine is called a *memory dump*, or dump for short; it displays the contents of memory in both hex and ASCII notation. The dump feature is initiated with a command of D followed by the address limits in hexadecimal. For example, the statement

```
>D100 18F
```

will dump memory from address 100 to 18F hex. The first address (100 in this case) must immediately follow the letter D. A space is typed and then the second address (18F in this case) is entered. Leading zeros are unnecessary.

Each line will display 16 memory locations. The hexadecimal address of the first location will appear at the beginning of the line. Then the hexadecimal representation of the contents will follow, two characters per byte. These are arranged in four groups of four bytes. The ASCII representations of the data will be given at the end of the line if printable. Otherwise, a period is given. A dump of the first line of the monitor might look like this.

```
>D5800 580F    (your command)

5800 C35C58C3 6558CD16 58CA0658 DB11E67F  .\X.eX..X..X....
```

Use your system editor to make the necessary alterations and additions to version 1. First, change the version number at the beginning of the program.

```
VERS    EQU    '2'    ;VERSION NUMBER
```

Next, locate the instruction

```
JZ       DUMP
```

that follows the label WARM. Remove the semicolon at the beginning of this line. Also delete the line just before it that jumps to WARM. The region should now look like this.

```
CALL     GETCH
CPI      'D'        ;DUMP?
JZ       DUMP
 . . .    . . .
```

The remaining instructions, shown in Listing 6.2, will be placed at the end of version 1, just preceding the END statement. It might be easier to delete the END statement, type in the new code, and then add a new END statement. The END statement is usually optional, anyway. One of the sub-routines (READHL) will translate the dump limits from ASCII-encoded hexadecimal into binary. One routine gets both the start and the stop address (using READHL) then checks to see that the second address is larger than the first. If the second address is smaller than the first, then the task will be aborted. Subroutine OUTHEX will convert the binary data already in memory into ASCII-coded hex for output to the console. Subroutine TSTOP is used to determine when to terminate the dump process. Finally, an error routine (ERROR) will be needed in case an invalid character is entered by the user.

```
Listing 6.2. Memory display

                   ; DUMP MEMORY IN HEXADECIMAL AND ASCII
                   ;
58EC CD2D59  DUMP:   CALL    RDHLDE   ;RANGE
58EF CD8359  DUMP2:  CALL    CRHL     ;NEW LINE
58F2 4E      DUMP3:  MOV     C,M      ;GET BYTE
58F3 CD9359          CALL    OUTHX    ;PRINT
58F6 23              INX     H        ;POINTER
58F7 7D              MOV     A,L
58F8 E60F            ANI     0FH      ;LINE END?
58FA CA0559          JZ      DUMP4    ;YES, ASCII
58FD E603            ANI     3        ;SPACE
58FF CC8E59          CZ      OUTSP    ; 4 BYTES
5902 C3F258          JMP     DUMP3    ;NEXT HEX
5905 CD8E59  DUMP4:  CALL    OUTSP
5908 D5              PUSH    D
5909 11F0FF          LXI     D,-10H   ;RESET LINE
590C 19              DAD     D
590D D1              POP     D
590E CD1D59  DUMP5:  CALL    PASCI    ;ASCII DUMP
5911 CDA759          CALL    TSTOP    ;DONE?
5914 7D              MOV     A,L      ;NO
5915 E60F            ANI     0FH      ;LINE END?
5917 C20E59          JNZ     DUMP5    ;NO
591A C3EF58          JMP     DUMP2
```

```
                    ;
                    ; DISPLAY MEMORY BYTE IN ASCII IF
                    ; POSSIBLE, OTHERWISE GIVE DECIMAL PNT
                    ;
591D 7E     PASCI:  MOV     A,M         ;GET BYTE
591E FE7F           CPI     DEL         ;HIGH BIT ON?
5920 D22859         JNC     PASC2       ;YES
5923 FE20           CPI     ' '         ;CONTROL CHAR?
5925 D22A59         JNC     PASC3       ;NO
5928 3E2E   PASC2:  MVI     A,'.'       ;CHANGE TO DOT
592A C31B58 PASC3:  JMP     OUTT        ;SEND
                    ;
                    ; GET H,L AND D,E FROM CONSOLE
                    ; CHECK THAT D,E IS LARGER
                    ;
592D CD3859 RDHLDE: CALL    HHLDE
5930 7B     RDHLD2: MOV     A,E
5931 95             SUB     L           ;E - L
5932 7A             MOV     A,D
5933 9C             SBB     H           ;D - H
5934 DA7B59         JC      ERROR       ;H,L BIGGER
5937 C9             RET
                    ;
                    ; INPUT H,L AND D,E. SEE THAT
                    ; 2 ADDRESSES ARE ENTERED
                    ;
5938 CD4459 HHLDE:  CALL    READHL      ;H,L
593B DA7B59         JC      ERROR       ;ONLY 1 ADDR
593E EB             XCHG                ;SAVE IN D,E
593F CD4459         CALL    READHL      ;D,E
5942 EB             XCHG                ;PUT BACK
5943 C9             RET
                    ;
                    ; INPUT H,L FROM CONSOLE
                    ;
5944 D5     READHL: PUSH    D
5945 C5             PUSH    B           ;SAVE REGS
5946 210000         LXI     H,0         ;CLEAR
5949 CDCC58 RDHL2:  CALL    GETCH       ;GET CHAR
594C DA6859         JC      RDHL5       ;LINE END
594F CD6B59         CALL    NIB         ;TO BINARY
5952 DA5E59         JC      RDHL4       ;NOT HEX
5955 29             DAD     H           ;TIMES 2
5956 29             DAD     H           ;TIMES 4
5957 29             DAD     H           ;TIMES 8
5958 29             DAD     H           ;TIMES 16
5959 B5             ORA     L           ;ADD NEW CHAR
595A 6F             MOV     L,A
595B C34959         JMP     RDHL2       ;NEXT
                    ;
                    ; CHECK FOR BLANK AT END
                    ;
595E FEF7   RDHL4:  CPI     APOS        ;APOSTROPHE
5960 CA6859         JZ      RDHL5       ;ASCII INPUT
5963 FEF0           CPI     (' '-'0') AND OFFH
5965 C27B59         JNZ     ERROR       ;NO
5968 C1     RDHL5:  POP     B
5969 D1             POP     D           ;RESTORE
596A C9             RET
```

```
                    ;
                    ; CONVERT ASCII CHARACTERS TO BINARY
                    ;
596B D630           NIB:    SUI     '0'       ;ASCII BIAS
596D D8                     RC                ; < 0
596E FE17                   CPI     'F'-'0'+1
5970 3F                     CMC               ;INVERT
5971 D8                     RC                ;ERROR, > F
5972 FE0A                   CPI     10
5974 3F                     CMC               ;INVERT
5975 D0                     RNC               ;NUMBER 0-9
5976 D607                   SUI     'A'-'9'-1
5978 FE0A                   CPI     10        ;SKIP : TO
597A C9                     RET               ;LETTER A-F
                    ;
                    ; PRINT ? ON IMPROPER INPUT
                    ;
597B 3E3F           ERROR:  MVI     A,'?'
597D CD1B58                 CALL    OUTT
5980 C30058                 JMP     START     ;TRY AGAIN
                    ;
                    ; START NEW LINE, GIVE ADDRESS
                    ;
5983 CDB658         CRHL:   CALL    CRLF      ;NEW LINE
                    ;
                    ; PRINT H,L IN HEX
                    ;
5986 4C             OUTHL:  MOV     C,H
5987 CD9359                 CALL    OUTHX     ;H
598A 4D             OUTLL:  MOV     C,L
                    ;
                    ; OUTPUT HEX BYTE FROM C AND A SPACE
                    ;
598B CD9359         OUTHEX: CALL    OUTHX
                    ;
                    ; OUTPUT A SPACE
                    ;
598E 3E20           OUTSP:  MVI     A,' '
5990 C31B58                 JMP     OUTT
                    ;
                    ; OUTPUT A HEX BYTE FROM C
                    ; BINARY TO ASCII HEX CONVERSION
                    ;
5993 79             OUTHX:  MOV     A,C
5994 1F                     RAR               ;ROTATE
5995 1F                     RAR               ; FOUR
5996 1F                     RAR               ; BITS TO
5997 1F                     RAR               ; RIGHT
5998 CD9C59                 CALL    HEX1      ;UPPER CHAR
599B 79                     MOV     A,C       ;LOWER CHAR
599C E60F           HEX1:   ANI     0FH       ;TAKE 4 BITS
599E C690                   ADI     90H
59A0 27                     DAA               ;DAA TRICK
59A1 CE40                   ACI     40H
59A3 27                     DAA
59A4 C31B58                 JMP     OUTT
                    ;
                    ; CHECK FOR END, H,L MINUS D,E
                    ; INCREMENT H,L
```

```
                        ;
        59A7 23         TSTOP:  INX     H
        59A8 7B                 MOV     A,E
        59A9 95                 SUB     L         ; E - L
        59AA 7A                 MOV     A,D
        59AB 9C                 SBB     H         ; D - H
        59AC D0                 RNC               ;NOT DONE
        59AD E1                 POP     H         ;RAISE STACK
        59AE C9                 RET
                        ;
        59B1                    END
```

Type up the new instructions, then, after you leave the editor, rename the new file. The CP/M command will be

```
REN    MON2.ASM=MON1.ASM
```

Rename the backup file to its original name.

```
REN    MON1.ASM=MON1.BAK
```

Assemble version 2 and load it into memory. Start it up by branching to the address of START. Again, the version number should be printed, and the prompt symbol should appear. Test the new feature by dumping a portion of the monitor.

```
>D5800 585F
```

Be sure to type a carriage return at the end of the line. Input errors can be corrected by typing a backspace or DEL. Check to see that the hex code displayed on the screen matches the assembly listing code. Most of the ASCII representation will be meaningless. But the section from 5842 to 585A hex will read

```
Ver 2
```

Now test the scroll-freeze commands. Dump a large section of memory.

```
>D0 1000
```

Type a control-S as the data are being displayed on the console. The console screen should freeze. Now type a control-Q. The screen should again resume displaying the data. The commands of Control-S and control-Q will alternately freeze and resume the scrolling.

Try the routine that checks for proper dump limits by typing a larger address first, then a smaller address.

```
D300 200
```

As a result of this improper input, a question mark should be printed. Then the prompt will appear on a new line. If everything is all right, return to your regular system by entering a control-X.

If version 2 does not perform satisfactorily, compare the hex code in your assembly listing with the values given in Listing 6.2 for the new code. Correct any errors, reassemble the program, and try it again.

VERSION 3: A CALL AND GO ROUTINE

Now that both hex-to-binary and binary-to-hex routines are available, we can easily include new features. A CALL routine and a GO routine will be added in version 3. These routines will allow you to branch to any address in memory. The GO command will be useful for testing subroutines. For this latter command, the monitor warm-start address (WARM) is on the stack when the call is made. A subroutine can be called with the C command. The execution of an RET instruction at the end of the subroutine will cause a return to the monitor.

First, change the version number to 3. Then find the instructions corresponding to the C and G commands after the label WARM. Remove the semicolons from the beginning of the lines that branch to CALLS and GO. Delete the prior lines that jump to WARM. The program should now look like

```
CPI     'C'     ;CALL?
JZ      CALLS
CPI     'G'     ;GO?
JZ      GO
```

The remaining lines of code (and some comments) are placed at the end of the source program just prior to the END statement. They are given in Listing 6.3.

```
Listing 6.3. A CALL and a GO routine.

                ; ROUTINE TO GO ANYWHERE IN MEMORY
                ; ADDRESS OF WARM IS ON STACK, SO A
                ; SIMPLE RET WILL RETURN TO THIS MONITOR
                ;
59AF E1         GO:     POP     H       ;RAISE STACK
59B0 CD4459     CALLS:  CALL    READHL  ;GET ADDRESS
59B3 E9                 PCHL            ;GO THERE
                ;
59B4                    END
```

Another important change should be made at this time. Since we can now branch to any place in memory with the GO command, we can change the abort command, control-X. Redefine HOME near the beginning of the source program so that an abort command of control-X will restart the monitor.

```
HOME    EQU    ORGIN    ;ABORT ADDRESS
```

This line was originally entered as a comment. Remove the semicolon at the beginning of the line and delete the previous line.

Assemble the new version and load it into memory. Branch to the monitor and try the dump routine as before. Try the CALL feature by calling the monitor itself.

```
>C5800
```

The cold-start message should appear. Now use the GO routine to return to your main system. If the GO address is zero, then no argument need follow the G command.

```
>G
```

VERSION 4: A MEMORY-LOAD ROUTINE

In version 2 we added a routine that could be used to inspect any memory location. A routine which can be used to change memory will now be added. Change the version number to 4. Locate the instruction

```
;       JZ     LOAD
```

following WARM. Remove the semicolon at the beginning of the line. Delete the original JZ WARM on the prior line. The program should now look like

```
CPI     'L'
JZ      LOAD
```

Add the load routines shown in Listing 6.4 to the end of the source program.

```
Listing 6.4. A memory-load routine.

                    ; LOAD HEX OR ASCII CHAR INTO MEMORY
                    ; FROM CONSOLE. CHECK TO SEE IF
                    ; THE DATA ACTUALLY GOT THERE
                    ; APOSTROPHE PRECEEDS ASCII CHAR
                    ; CARRIAGE RETURN PASSES OVER LOCATION
                    ;
59B4 CD4459   LOAD:   CALL    READHL   ;ADDRESS
59B7 CD8659   LOAD2:  CALL    OUTHL    ;PRINT IT
59BA CD1D59           CALL    PASCI    ;ASCII
59BD CD8E59           CALL    OUTSP
59C0 4E               MOV     C,M      ;ORIG BYTE
59C1 CD8B59           CALL    OUTHEX   ;HEX
59C4 E5               PUSH    H        ;SAVE PNTR
59C5 CD7C58           CALL    INPL2    ;INPUT
59C8 CD4459           CALL    READHL   ; BYTE
59CB 45               MOV     B,L      ; TO B
```

```
59CC  E1                          POP    H
59CD  FEF7                        CPI    APOS
59CF  CADE59                      JZ     LOAD6     ;ASCII INPUT
59D2  79                          MOV    A,C       ;HOW MANY?
59D3  B7                          ORA    A         ;NONE?
59D4  CADA59                      JZ     LOAD3     ;YES
59D7  CDE559        LOAD4:        CALL   CHEKM     ;INTO MEMORY
59DA  23            LOAD3:        INX    H         ;POINTER
59DB  C3B759                      JMP    LOAD2
                    ;
                    ; LOAD ASCII CHARACTER
                    ;
59DE  CDCC58        LOAD6:        CALL   GETCH
59E1  47                          MOV    B,A
59E2  C3D759                      JMP    LOAD4
                    ;
                    ; COPY BYTE FROM B TO MEMORY
                    ; AND SEE THAT IT GOT THERE
                    ;
59E5  70            CHEKM:        MOV    M,B       ;PUT IN MEM
59E6  7E                          MOV    A,M       ;GET BACK
59E7  B8                          CMP    B         ;SAME?
59E8  C8                          RZ               ;YES
59E9  C37B59                      JMP    ERROR     ;BAD
                    ;
59EC                              END
```

Assemble version 4 and compare the assembly listing of the new part to Listing 6.4. Load the new program and branch to the beginning. Recheck the dump command by examining the new code for the load routine

```
>D59B4 59EB
```

Now try the load command. Great care must be taken when typing the load address. This command will actually change the contents of memory, including the monitor itself.

Type the letter L, the hexadecimal address, and a carriage return. The response will be the address that was typed and the current contents of that memory location. The data are represented two ways: in ASCII and in hex. If the ASCII value is not a printable character, it is rendered as a period.

The displayed location can now be changed by typing the new value and a carriage return. The data can be entered in several ways. It can be in the form of one or two hex characters. If more than two characters are entered, only the last two are actually used. This allows you to correct an error by continuing to type. Errors can also be corrected with the backspace or the DEL/RUB key. A single ASCII character can be entered into memory by preceding it with an apostrophe.

As each new value and a carriage return is typed, the next address and the present data value will appear. In this way, a machine-language routine can be entered from the console. Of course, using an assembler is a more efficient way to generate a long program. But our load routine will be useful for making simple changes or for writing short routines.

The load command is terminated by typing a control-X (if you redefined HOME as ORGIN back in version 3). It is also terminated if you enter a nonhex character. Control then returns to the monitor. If the load command is used to revise existing code, another feature is useful. A carriage return is given without entering any data. The memory pointer then skips over the current location and the corresponding value is not changed.

After each revised byte is entered into memory, the monitor checks to see that the new value is correct. If an attempt is made to write into protected, nonexistent, or defective memory, the load process is terminated and a question mark is printed.

Try the load routine by entering the following five bytes into a convenient location such as 4000 hex.

```
3E   7 D3 XX C9
```

This sequence corresponds to the assembly language program

```
3E07    MVI     A,7
D3XX    OUT     XX
C9      RET
```

The value of XX is the console-data address (CDATA in the source program). Check the code with the dump command.

```
D4000 4004
```

Now use the CALL command to execute the routine

```
C4000
```

The console bell should sound and control will return to the command level of our monitor.

VERSION 5: USEFUL ENTRY POINTS

Changes to the first four versions were made for the most part by adding new instructions to the end of the existing program. For versions 5, 6, and 7, we are going to start the process over to some extent by inserting some new instructions in the middle of the existing program.

At the beginning of the monitor there are two jump instructions.

```
JMP     COLD
JMP     WARM
```

Entry points such as these are sometimes called *vectors*. The first jump to COLD is the initial, cold-start entry point into the monitor. Stack initialization and printing of the sign-on message occur at this time. But other

housekeeping chores, such as interface initialization, could be performed in this section. The second vector causes a jump to WARM, a restart entry point that does not alter the stack pointer.

We will now insert some additional vectors after these first two. The additional jumps will provide fixed entry points to useful subroutines in the monitor. These routines can then be easily called by other programs outside the monitor. Since these jump instructions are all at the beginning of the monitor, their addresses won't change when the monitor is altered. Furthermore, new vectors can be added to the end of the group without affecting those already present.

Place the five jump instructions shown in Listing 6.5 at the beginning of the monitor just after the first two (START and RESTRT).

```
Listing 6.5. Some useful entry points.

            ; VECTORS TO USEFUL ROUTINES
            ;
5806 C32A58 COUT:   JMP     OUTT    ;OUTPUT CHAR
5809 C31558 CIN:    JMP     INPUTT  ;INPUT CHAR
580C C3D058 INLN:   JMP     INPLN   ;INPUT LINE
580F C32559 GCHAR:  JMP     GETCH   ;GET CHAR
5812 C3EC59 OUTH:   JMP     OUTHX   ;BIN TO HEX
            ;
```

Reassemble the monitor, load it into memory, and try the DUMP, LOAD, and GO routines again to be sure that they still work. Now, when separate, external routines are written, they need not contain subroutines for console input, output, conversion of binary to hex, and so on.

A character can be displayed on the console by calling COUT with the character in the accumulator. A single console character is obtained by calling CIN. The byte is returned in the accumulator.

An entire line of characters can be easily obtained by calling the line-input entry INLN. As each character is typed, it is automatically printed on the console. The error-correction commands are available at this time. The backspace and DEL/RUB keys can be used to delete the previously typed character. A line is normally terminated with a carriage return. After the console-input buffer has been filled by a call to INLN, the GCHAR address can be called.

A character is returned in the accumulator for each call to GCHAR. When the input buffer has been exhausted, the carry flag is set. Typing a control-X will abort a routine and return control to the monitor. Therefore, it is not necessary to include an abort routine in separate, external programs.

The fifth new entry point will perform a conversion from binary to ASCII-coded hexadecimal. This will allow display of individual memory locations or any of the CPU registers. The byte to be converted is placed in the C register and the address of OUTH is called. The accumulator is also used by the conversion routine in this case, so it may be necessary to save the accumulator's original contents on the stack by using a PUSH instruction.

Use the monitor to write the following short routine. This program will demontrate the new vectors.

```
3E07     MVI     A,7
C30658   JMP     COUT
```

This program, which is similar to the one written in the last section, can be placed almost anywhere in memory. This time, however, there is no need to worry about the output device address since the monitor takes care of this. Branch to the routine by giving the monitor command of C and the address

```
>C4000
```

The monitor output routine will ring the console bell, then cause a return to the address WARM.

The monitor now contains a bare minimum of features. The DUMP, LOAD, GO, and CALL routines can be used to write and inspect simple routines. The several vectors located at the beginning of the monitor, allow easy access to useful subroutines within. These vectors will greatly simplify the task of writing and debugging simple routines.

At this point, you may wish to go on to Chapter 8 and try some of the routines discussed there. Otherwise, continue in this chapter as we add more features to the monitor. The new features will include memory fill and zero, memory search, ASCII load and dump, input from and output through any port, a memory test, byte replacement, and memory comparison.

VERSION 6: AUTOMATIC MEMORY SIZE

A routine that will automatically find the top of usable memory will be added for version 6. The routine is executed each time a cold or warm start is performed. The first byte of memory in each page of 256 bytes of memory is checked, starting with page zero. The byte in memory is moved to the accumulator, complemented, then written back to the same memory location. The result is compared to the accumulator to see if it is the same. If so, then the byte in the accumulator is complemented back to the original byte and it is written back into memory. This effectively restores the original byte.

Each page of memory is checked in this way until the monitor stack area is encountered or until defective, missing, or protected memory is found. The hexadecimal value of this top page is printed just preceding the monitor greater-than prompt (>). For example, if the monitor starts at 5800 hex and the stack is located at 57A0, then the prompt will appear as

```
57>
```

This routine provides a regular, continuous check on the memory size. It does not check all of the memory, but only the first byte of each 256 bytes of the page. Nevertheless, this check may point up potential problems. A more complete memory test program will be added in version 15.

```
       Listing 6.6. Automatic memory check.

                           ;
                           ; FIND TOP OF USABLE MEMORY.
                           ; CHECK FIRST BYTE OF EACH PAGE OF MEMORY
                           ; STARTING AT ADDRESS ZERO.  STOP AT STACK
                           ; OR MISSING/DEFECTIVE/PROTECTED MEMORY.
                           ; DISPLAY HIGH BYTE OF MEMORY TOP.

    5865 210000            LXI     H,0         ;PAGE ZERO
    5868 0657              MVI     B,STACK SHR 8
    586A 7E        NPAGE:  MOV     A,M         ;GET BYTE
    586B 2F                CMA                 ;COMPLEMENT
    586C 77                MOV     M,A         ;PUT IT BACK
    586D BE                CMP     M           ;SAME?
    586E C27858            JNZ     MSIZE       ;NO, MEM TOP
    5871 2F                CMA                 ;ORIG BYTE
    5872 77                MOV     M,A         ;RESTORE IT
    5873 24                INR     H           ;NEXT PAGE
    5874 05                DCR     B
    5875 C26A58            JNZ     NPAGE       ;KEEP GOING
    5878 4C        MSIZE:  MOV     C,H         ;MEM TOP
    5879 CD0F59            CALL    CRLF        ;NEW LINE
    587C CDEC59            CALL    OUTHX       ;PRINT MEM SIZE
    587F CDD058            CALL    INPLN       ;CONSOLE LINE
    5882 CD2559            CALL    GETCH       ;FIRST CHAR
                           ;
```

Insert the new instructions shown in Listing 6.6 right after the PUSH H instruction that follows the label WARM.

```
    WARM:   LXI     H,WARM  ;RET TO
            PUSH    H       ; HERE

            (add new code here)
```

If your assembler does not have the shift-right operation SHR, then just code the high half of the stack address. The second line in Listing 6.6 might look like this instead.

```
    MVI     B,57H
```

Assemble the new version. Check the assembly listing to see that the new additions are correct. Then try out version 6.

The symbol table at this point follows.

symbols:

00F7 APOS	0008 BACKUP	59B0 CALLS	0011 CDATA
0011 CDATA0	59E5 CHEKM	584A COLD	000D CR
5983 CRHL	58B6 CRLF	0010 CSTAT	0010 CSTAT0
0008 CTRH	0011 CTRQ	0013 CTRS	0018 CTRX
007F DEL	58EC DUMP	58EF DUMP2	58F2 DUMP3
5905 DUMP4	590E DUMP5	597B ERROR	001B ESC
58E0 GETC4	58CC GETCH	59AF GO	599C HEX1
5938 HHLDE	0000 HOME	57A5 IBUFC	57A6 IBUFF
57A3 IBUFP	00DB INC	0001 INMSK	587C. INFL2
5898 INFL3	58C0 INPLB	58A8 INPLC	58A2 INPLE
5884 INPLI	5877 INPLN	580C INPUT2	5806 INPUTT
5816 INSTAT	000A LF	59B4 LOAD	59B7 LOAD2
59DA LOAD3	59D7 LOAD4	59DE LOAD6	596B NIB
0002 OMSK	5800 ORGIN	581C OUT2	582A OUT3
5835 OUT4	00D3 OUTC	598B OUTHEX	5986 OUTHL
5993 OUTHX	598A OUTLL	598E OUTSP	581B OUTT
5928 PASC2	592A PASC3	591D PASCI	57A0 PORTN
5949 RDHL2	595E RDHL4	5968 RDHL5	5930 RDHLD2
592D RDHLDE	5944 READHL	5803 RESTRT	00C9 RETC
58E2 SENDM	5840 SIGNON	57A0 STACK	5800 START
0009 TAB	0018 TOP	59A7 TSTOP	0031 VERS
5853 WARM			

VERSION 7: COMMAND-BRANCH TABLE

Before incorporating additional features into the monitor, we should make a fundamental change in the *command processor routine*. This routine interprets the initial character of the command line. The routine looks for commands beginning with the letter D, C, G, or L. Five bytes of instruction are needed for each one of these commands. For example, the LOAD routine uses the instructions

```
CPI      'L'
JZ       LOAD
```

Since there are 26 letters of the alphabet, there will eventually be 26 times 5, or 130 bytes needed if 26 different commands are incorporated. This approach is satisfactory for a short table, but there is a better approach when there are many entries.

An alternate method is to use a command branch table. This method only requires two bytes per table entry plus 23 bytes of decoding instructions. The disadvantage of this method is that all 26 table entries will have to be allocated, even if only a few are needed. Thus, there may be a lot of unallocated table entries.

Delete the 13 lines of program immediately following the command of CALL GETCH, just after the label MSIZE.

```
CPI      'D'      ;DUMP <delete 13 lines>  <====!
. . .                                           !
. . .                                           !
JMP      WARM     ;TRY AGAIN                <====!
```

The new code that will be added is given in Listing 6.7. Notice that there are 26 table entries. Each line corresponds to one letter of the alphabet. At this time, most of the entries refer to the error routine called ERROR. This is because we have not yet incorporated many features. As new features are added to the monitor, these error references will be replaced by the desired subroutine names.

Listing 6.7. Command-branch table.

```
                        ; MAIN COMMAND PROCESSOR
                        ;
5885 D641               SUI      'A'        ;CONVERT OFFSET
5887 DAD459             JC       ERROR      ; < A
588A FE1A               CPI      'Z'-'A'+1
588C D2D459             JNC      ERROR      ; > Z
588F 87                 ADD      A          ;DOUBLE
5890 219C58             LXI      H,TABLE    ;START
5893 1600               MVI      D,0
5895 5F                 MOV      E,A        ;OFFSET
5896 19                 DAD      D          ;ADD TO TABLE
5897 5E                 MOV      E,M        ;LOW BYTE
5898 23                 INX      H
5899 56                 MOV      D,M        ;HIGH BYTE
589A EB                 XCHG                ;INTO H,L
589B E9                 PCHL                ;GO THERE
                        ;
                        ; COMMAND TABLE
                        ;
589C D459     TABLE:    DW       ERROR      ;A, ASCII
589E D459               DW       ERROR      ;B
58A0 095A               DW       CALLS      ;C, CALL SUBR
58A2 4559               DW       DUMP       ;D, DUMP
58A4 D459               DW       ERROR      ;E
58A6 D459               DW       ERROR      ;F, FILL
58A8 085A               DW       GO         ;G, GO
58AA D459               DW       ERROR      ;H, HEX MATH
58AC D459               DW       ERROR      ;I, PORT INPUT
58AE D459               DW       ERROR      ;J, MEMORY TEST
58B0 D459               DW       ERROR      ;K
58B2 0D5A               DW       LOAD       ;L, LOAD
58B4 D459               DW       ERROR      ;M, MOVE
58B6 D459               DW       ERROR      ;N
58B8 D459               DW       ERROR      ;O, PORT OUTPUT
58BA D459               DW       ERROR      ;P
58BC D459               DW       ERROR      ;Q
58BE D459               DW       ERROR      ;R, REPLACE
58C0 D459               DW       ERROR      ;S, SEARCH
58C2 D459               DW       ERROR      ;T
58C4 D459               DW       ERROR      ;U
58C6 D459               DW       ERROR      ;V, VERIFY MEM
58C8 D459               DW       ERROR      ;W
58CA D459               DW       ERROR      ;X, STACK POINTER
58CC D459               DW       ERROR      ;Y
58CE D459               DW       ERROR      ;Z, ZERO
```

Generate the new version, assemble it, and compare the resulting assembly listing to the one given in Listing 6.7. Try out version 7. It should behave exactly like version 6. It will be a bit longer than version 6 at this stage, but it will not grow as rapidly as we add new features. In the remainder of this chapter, we will add the new subroutines to the end of source program. The label for the subroutine will be placed in the appropriate place of the command branch table.

VERSION 8: DISPLAY THE STACK POINTER

By adding seven bytes of new code, we will be able to examine our monitor's stack pointer. This will alert us to a possible problem with the monitor itself. We may find, for example, that as we use the monitor, the stack tends to grow up or down in memory, rather than remain in the same place. This is undesirable and indicates that we are not properly lowering or raising the stack somewhere in the program. For example, subroutine TSTOP increments the pointer then checks to see if the current task should be terminated. If so, the stack is raised with a POP instruction. Then a return instruction skips one level of subroutines, so that control returns to the address of WARM.

Change the version number to 8. Also change the entry in the command table that corresponds to the command of X. This is the third from the last entry. Delete the word ERROR and replace it with the word REGS.

```
DW      REGS    ;X, STK POINTER
```

Then go to the end of the source program. We will make a minor change in subroutine CHECKM, the last subroutine in the monitor. Then the new instructions will be added. Delete the END statement and the instruction just prior to the END statement.

```
JMP     ERROR   ;BAD
```

Then add the new instructions as shown in Listing 6.8.

```
Listing 6.8. Display the stack pointer.

5A42 F1         ERRP:   POP     PSW     ;RAISE STACK
5A43 3E42       ERRB:   MVI     A,'B'   ;BAD
5A45 CD2A58     ERR2:   CALL    OUTT
5A48 CDE759             CALL    OUTSP
5A4B C3DF59             JMP     OUTHL   ;POINTER
                ;
                ; DISPLAY STACK POINTER REGISTER
                ;
5A4E 210000     REGS:   LXI     H,0
5A51 39                 DAD     SP
5A52 C3DF59             JMP     OUTHL
```

Reassemble the monitor and try it out. First give the X command (with no argument). Make a note of the value given for the stack pointer. Now, try other monitor features such as the dump and load commands. After each of these commands, give the X command to see that the stack pointer remains in the same place.

Try the separate routine that rings the console bell. This routine, which was written for version 4, may have to be rewritten if it was destroyed by the assembler or the editor. Again, check that the stack pointer is still in the same place. When you are convinced that everything is all right, continue to the next version.

VERSION 9: ZERO AND FILL ROUTINES

In version 4, we added a routine that could be used to change individual memory locations, one at a time. We will now add a routine which will allow us to fill a portion of memory with a constant value. A separate command for zeroing memory is also added for convenience, even though this operation could be performed with the FILL command.

Change the version number to 9, then alter the two command table entries that correspond to the F (fill) and Z (zero) commands.

```
DW      FILL    ;F, MEMORY
 . . .
DW      ZERO    ;Z, MEMORY
```

Add the new code shown in Listing 6.9 to the end of the program.

```
Listing 6.9. Zero and fill routines.

                     ; ZERO A PORTION OF MEMORY
                     ; THE MONITOR AND STACK ARE
                     ; PROTECTED
                     ;
5A55  CD8659  ZERO:   CALL    RDHLDE  ;RANGE
5A58  0600            MVI     B,0
5A5A  C3665A          JMP     FILL2
                     ;
                     ; FILL A PORTION OF MEMORY
                     ;
5A5D  CD7C5A  FILL:   CALL    HLDEBC  ;RANGE, BYTE
5A60  FEF7            CPI     APOS    ;APOSTROPHE?
5A62  CA755A          JZ      FILL4   ;YES ASCII
5A65  41              MOV     B,C
5A66  7C      FILL2:  MOV     A,H     ;FILL BYTE
5A67  FE57            CPI     STACK SHR 8 ;TOO FAR?
5A69  D2D459          JNC     ERROR   ;YES
5A6C  CD3E5A  FILL3:  CALL    CHEKM   ;PUT, CHECK
5A6F  CD005A          CALL    TSTOP   ;DONE?
5A72  C3665A          JMP     FILL2   ;NEXT
                     ;
```

```
5A75 CD2559    FILL4:   CALL    GETCH    ;ASCII CHAR
5A78 47                 MOV     B,A
5A79 C36C5A             JMP     FILL3
               ;
               ; GET H,L D,E AND B,C
               ;
5A7C CD8A5A    HLDEBC:  CALL    HLDECK   ;RANGE
5A7F DAD459             JC      ERROR    ;NO BYTE
5A82 E5                 PUSH    H
5A83 CD9D59             CALL    READHL   ;3RD INPUT
5A86 44                 MOV     B,H      ;MOVE TO
5A87 4D                 MOV     C,L      ; B,C
5A88 E1                 POP     H
5A89 C9                 RET
               ;
               ; GET 2 ADDRESSES, CHECK THAT
               ; ADDITIONAL DATA IS INCLUDED
               ;
5A8A CD9159    HLDECK:  CALL    HHLDE    ;2 ADDR
5A8D DAD459             JC      ERROR    ;THAT'S ALL
5A90 C38959             JMP     RDHLD2   ;CHECK
```

Assemble the program, load it into memory, and try it out. First, display a portion of memory.

>D4000 404F

Then, zero out a part of this region.

>Z4000 403F

Display the region again to be sure that the zero routine is working. Now fill a portion of the previously zeroed memory with A5 hex bytes.

>F4001 401E A5

Again, dump this region of memory to ensure that the fill routine is working.

>D4000 404F

Finally, check the ASCII fill command by filling with a $ symbol.

>F4020 402F '$

As with the load command, ASCII input is preceded by an apostrophe.

VERSION 10: A BLOCK-MOVE ROUTINE

The next routine to be added will allow us to move a block data from one memory location to another. This is actually a duplication routine, since the original memory block will remain unchanged. As each byte is moved to the new location, a check is made to ensure that it actually got there.

First, change the version number to 10. Then add the new lines to the end of the source program. Change the branch table entry corresponding to the command of M.

```
DW      MOVE    ;M, MEMORY
```

Insert the instructions given in Listing 6.10 to the end of the source program. Assemble the monitor and try it out.

```
Listing 6.10. A block-move routine.

                        ; MOVE A BLOCK OF MEMORY H,L-D,E TO B,C
                        ;
5A93 CD7C5A     MOVE:   CALL    HLDEBC  ;3 ADDR
5A96 CDA05A     MOVDN:  CALL    MOVIN   ;MOVE/CHECK
5A99 CD005A             CALL    TSTOP   ;DONE?
5A9C 03                 INX     B       ;NO
5A9D C3965A             JMP     MOVDN
                        ;
5AA0 7E         MOVIN:  MOV     A,M     ;BYTE
5AA1 02                 STAX    B       ;NEW LOCATION
5AA2 0A                 LDAX    B       ;CHECK
5AA3 BE                 CMP     M       ;IS IT THERE?
5AA4 C8                 RZ              ;YES
5AA5 60                 MOV     H,B     ;ERROR
5AA6 69                 MOV     L,C     ;INTO H,L
5AA7 C3425A             JMP     ERRP    ;SHOW BAD
```

The move command requires three addresses. These are the start and stop address of the source block and the start address of the destination block. For example,

```
>M5800 58FF 4000
```

will move the first page of the monitor (5800 to 58FF hex) down to the address range 4000 to 40FF hex.

The move routine is designed to move data downward. Thus the first byte of a block can be deleted by moving the remainder of the program downward by one byte. The command

```
>M103 1000 100
```

moves the memory block in the address range 103 through 1000 down three bytes to the memory range 100 through FFD hex. On the other hand, a block move in the upward direction must be done carefully.

If the new block does not overlap the old, then there is no problem. But if there is an overlap, then the upward move will destroy some of the data. One possible solution to this problem is to first move the block downward until it is clear of the new upper block. Then move the block up to the desired location. Another possibility is to move the upper half of the block first, then move the lower half.

The best solution is to have a more sophisticated move routine. This routine should first determine whether the move is to be upward or downward. If the movement is downward, then the move commences with the lower part of the block (as with the present program). But if the move is upward, then it should begin with the upper end of the block. The memory pointers should now move downward in memory. With this approach, the original data will be unaltered. This additional feature is more easily coded with the Z-80 block-move routines than with the 8080 instructions.

We have not incorporated the upward-move feature at this time. In developing a system monitor, there must be a tradeoff between features and space. A minimum of idiot-proofing is necessary. But, if we want to have a monitor that will fit into 1K bytes of ROM, we will have to make some compromises.

Notice that this move routine moves a byte from the source location into the destination location. It then reads the byte back from the new location to see that it actually got there. If an attempt is made to move data into read-only memory, protected memory, or defective memory, the process will be terminated. The address of the location will be printed following the letter B (for "bad").

If we want to retain this memory-checking feature, we will not be able to use the Z-80 block-move routines. The problem is that the Z-80 routines perform an automatic pointer increment after each byte is moved. If a memory check is desired, then the destination pointer will have to be backed up after each byte is moved. This will allow the newly moved byte to be checked. Finally, the pointer will have to be incremented again.

VERSION 11: A SEARCH ROUTINE

Sometimes it is necessary to find a particular data byte or address in memory. Or perhaps all occurrences of a data byte or an address within a memory block are needed. For version 11, we will add a hex search routine. Change the version number and the branch table entry for the letter S.

```
DW        SEARCH   ;S, MEMORY
```

Add the new instructions as given in Listing 6.11.

```
        Listing 6.11. Search for 1 or 2 bytes.

                    ; SEARCH FOR 1 OR 2 BYTES OVER THE
                    ; RANGE H,L D,E. BYTES ARE IN B,C
                    ; B HAS CARRIAGE RETURN IF ONLY ONE BYTE
                    ; PUT SPACE BTWEEN BYTES IF TWO
                    ; FORMAT: START STOP BYTE1 BYTE2
                    ;
5AAA CD7C5A    SEARCH: CALL    HLDEBC   ;RANGE, 1ST BYTE
5AAD 060D      SEAR2:  MVI     B,CR     ;SET FOR 1 BYTE
```

```
5AAF DAB85A                   JC      SEAR3     ;ONLY ONE
5AB2 E5                       PUSH    H
5AB3 CD9D59                   CALL    READHL    ;2ND BYTE
5AB6 45                       MOV     B,L       ;INTO C
5AB7 E1                       POP     H
5AB8 7E          SEAR3:       MOV     A,M       ;GET BYTE
5AB9 B9                       CMP     C         ;MATCH?
5ABA C2CF5A                   JNZ     SEAR4     ;NO
5ABD 23                       INX     H         ;YES
5ABE 78                       MOV     A,B       ;ONLY 1?
5ABF FE0D                     CPI     CR
5AC1 CAC95A                   JZ      SEAR5     ;YES
                 ;
                 ; FOUND FIRST MATCH, CHECK FOR SECOND
                 ;
5AC4 7E                       MOV     A,M       ;NEXT BYTE
5AC5 B8                       CMP     B         ;MATCH?
5AC6 C2CF5A                   JNZ     SEAR4     ;NO
                 ;
5AC9 2B          SEAR5:       DCX     H         ;A MATCH
5ACA C5                       PUSH    B
5ACB CDDC59                   CALL    CRHL      ;SHOW ADDR
5ACE C1                       POP     B
5ACF CD005A      SEAR4:       CALL    TSTOP     ;DONE?
5AD2 C3B85A                   JMP     SEAR3     ;NO
```

Our new feature will display the address of every occurrence of one or two chosen bytes. For example, the command

>S100 4FF 0D

will print the address of each occurrence of a carriage return (OD hex) over the memory block 100 to 4FF hex. The alternate command

>S0 FFFF 3E 10

includes two search bytes. This command will look for the byte 3E followed by the byte 10 over the entire 64K-byte memory range. These two bytes might represent the 8080 instruction MVI A,10 or perhaps the address 103E hex.

Notice that if two search bytes are given in the command, they must be separated by a space. If the command is incorrectly given without the space between the bytes, the search will only include the second byte. For example, the command

>S0 FFFF 3E10

will be interpreted as a search for the byte 10 hex. This occurs because only the last two characters of the field are used.

VERSION 12: ASCII LOAD, SEARCH, AND DISPLAY

At this time, the monitor is hex oriented, but it is capable of limited ASCII operations. For example, the DUMP routine gives both the hex and the ASCII representation of the data. The load and fill commands will accept ASCII characters when preceded by an apostrophe. In version 12, we will add three new ASCII commands: ASCII load, ASCII dump, and ASCII search. A continuous series of ASCII characters (a string), including a carriage return, line feed, tab, and so on, can be entered directly into memory. A straight ASCII dump will render an ASCII portion of memory in its natural form. And we will be able to search the memory for one or two ASCII characters. If the command line begins with the letter A, a branch will occur to a second command processor. The letter following the A will cause a jump to the desired task of dump, load, or search.

Change the version number to 12 and the command table entry for the letter A.

```
DW      ASCII   ;A, DUMP, LOAD
```

Type the code from Listing 6.12; assemble the new version and start it up.

```
        Listing 6.12. ASCII load, search, and display.

                    ; ASCII SUB-COMMAND PROCESSOR
                    ;
5AD5 CD2559 ASCII:  CALL    GETCH   ;NEXT CHAR
5AD8 FE44           CPI     'D'     ;DISPLAY
5ADA CA045B         JZ      ADUMP
5ADD FE53           CPI     'S'     ;SEARCH
5ADF CA2C5B         JZ      ASCS
5AE2 FE4C           CPI     'L'     ;LOAD
5AE4 C2D459         JNZ     ERROR
                    ;
                    ; LOAD ASCII CHARACTERS INTO MEMORY
                    ; QUIT ON CONTROL-X
                    ;
5AE7 CD9D59         CALL    READHL  ;ADDRESS
5AEA CDDF59         CALL    OUTHL   ;PRINT IT
5AED CD1558 ALOD2:  CALL    INPUTT  ;NEXT CHAR
5AF0 CD2A58         CALL    OUTT    ;PRINT IT
5AF3 47             MOV     B,A     ;SAVE
5AF4 CD3E5A         CALL    CHEKM   ;INTO MEMORY
5AF7 23             INX     H       ;POINTER
5AF8 7D             MOV     A,L
5AF9 E67F           ANI     7FH     ;LINE END?
5AFB C2ED5A         JNZ     ALOD2   ;NO
5AFE CDDC59         CALL    CRHL    ;NEW LINE
5B01 C3ED5A         JMP     ALOD2
                    ;
                    ; DISPLAY MEMORY IN STRAIGHT ASCII.
                    ; KEEP CARRIAGE RETURN, LINE FEED, CHANGE
                    ; TAB TO SPACE, REMOVE OTHER CONTROL CHAR.
                    ;
```

```
5B04 CD8659    ADUMP:  CALL    RDHLDE    ;RANGE
5B07 7E        ADMP2:  MOV     A,M       ;GET BYTE
5B08 FE7F              CPI     DEL       ;HIGH BIT ON?
5B0A D2265B            JNC     ADMP4     ;YES
5B0D FE20              CPI     ' '       ;CONTROL?
5B0F D2235B            JNC     ADMP3     ;NO
5B12 FE0D              CPI     CR        ;CARR RET?
5B14 CA235B            JZ      ADMP3     ;YES, OK
5B17 FE0A              CPI     LF        ;LINE FEED?
5B19 CA235B            JZ      ADMP3     ;YES, OK
5B1C FE09              CPI     TAB
5B1E C2265B            JNZ     ADMP4     ;SKIP OTHER
5B21 3E20              MVI     A,' '     ;SPACE FOR TAB
5B23 CD2A58    ADMP3:  CALL    OUTT      ;SEND
5B26 CD005A    ADMP4:  CALL    TSTOP     ;DONE?
5B29 C3075B            JMP     ADMP2     ;NO
               ;
               ; SEARCH FOR 1 OR 2 ASCII CHARACTERS
               ; NO SPACE BETWEEN ASCII CHARS
               ; FORMAT: START STOP 1 OR 2 ASCII CHAR
               ;
5B2C CD8659    ASCS:   CALL    RDHLDE    ;RANGE
5B2F CD2559            CALL    GETCH     ;FIRST CHAR
5B32 4F               MOV     C,A
5B33 CD2559            CALL    GETCH     ;2ND OR CARR RET
5B36 DAAD5A            JC      SEAR2     ;ONLY ONE CHAR
5B39 47               MOV     B,A       ;2ND
5B3A C3B85A            JMP     SEAR3
```

Dump a section of memory with the regular hex dump command. Then enter a line of ASCII characters using the new ASCII load command.

```
>AL4000  <carriage return>
4000 This is a test of the new <cr><lf>
ASCII load routine. <cr><lf>
```

All of these characters will be deposited directly into memory, including the carriage returns and line feeds. Type a control-X to abort the task. Inspect the new addition first with the hex dump

```
>D4000 404F
```

then inspect it with the new ASCII dump:

```
>AD4000 404F
```

Notice the difference. The ASCII dump renders the data as it was originally typed.

A carriage-return line-feed pair will cause a real carriage-return line-feed pair to be sent to the console. Tab characters are not expanded but are rendered as blanks (in line with our goal of reducing the monitor size). All other control characters are ignored.

VERSION 13: INPUT AND OUTPUT TO ANY PORT

The load routines added in versions 4 and 12 allow us to change individual memory locations. And the dump routines added in versions 2 and 12 allow us to inspect individual memory locations. For version 13, we will add a routine to read any I/O port and another to send a byte to any I/O port. This feature will allow us to initialize and test I/O ports.

The 8080 and Z-80 microprocessors can address 256 separate, 8-bit input/output ports. These ports are used for communicating with the console, list, and tape devices. In addition, if there is a front panel, the switches are usually assigned to a separate data port. Also, some disk-controller boards use several I/O ports for communication with the CPU.

It is more difficult to implement these I/O features on an 8080 CPU than on a Z-80. The reason is that the 8080 I/O instructions require the port address to be placed in memory immediately following the IN or OUT command

```
DB 10    IN    10H
D3 11    OUT   11H
```

By comparison, the Z-80 can execute I/O instructions with the device address located in the C register. Nevertheless, we will implement the input and output instructions, at this time, using only 8080 code.

The plan is to write the IN or OUT instruction in memory, write the port number in the next byte, then write a RET instruction in the third position. A call to the address of PORTN will then produce the desired effect. The routine that writes these bytes in the stack area is called PUTIO. Since we are developing a monitor that can be placed in ROM, we will have to perform the actual I/O instructions outside of the regular monitor code area. Three bytes of memory just above the stack were previously set aside for this purpose. They start with the address PORTN.

A fourth routine is also needed. Subroutine BITS is used to convert the binary data read from the selected port into ASCII-coded binary characters. An IN command then prints on the console the port data in both hex and binary. For example, the command

```
>IFF
```

will give the front-panel switch setting in both hex and binary notation.

```
F8 11110000
```

The BITS routine can be coded more efficiently if a Z-80 CPU is available. This is because the Z-80 can shift data in the general-purpose registers, as well as in the accumulator. This is discussed in Chapter 7.

Change the version number to 13 and alter the branch table entries for the letters I and O.

```
DW        IPORT    ;I, PORT INPUT
. . .
DW        OPORT    ;O, PORT OUTPUT
```

Add the new routines to the end of the source code. Assemble version 13 and try it out.

Listing 6.13. Input and output to any port.

```
                   ; INPUT FROM ANY PORT (8080 VERSION)
                   ;
5B3D CD9D59 IPORT:  CALL    READHL   ;PORT
5B40 4D             MOV     C,L      ;PORT TO C
5B41 3EDB           MVI     A,INC    ;IN CODE
5B43 CD635B         CALL    PUTIO    ;SETUP INPUT
5B46 6F             MOV     L,A
5B47 CDE359         CALL    OUTLL    ;HEX VALUE
                   ;
                   ; PRINT L REGISTER IN BINARY (8080 VER)
                   ;
5B4A 0608   BITS:   MVI     B,8      ;8 BITS
5B4C 7D     BIT2:   MOV     A,L
5B4D 87             ADD     A        ;SHIFT LEFT
5B4E 6F             MOV     L,A
5B4F 3E18           MVI     A,'0'/2  ;HALF OF 0
5B51 8F             ADC     A        ;DOUBLE+CARRY
5B52 CD2A58         CALL    OUTT     ;PRINT BIT
5B55 05             DCR     B
5B56 C24C5B         JNZ     BIT2     ;8 TIMES
5B59 C9             RET
                   ;
                   ; OUTPUT BYTE FROM PORT (8080 VERSION)
                   ; FORMAT IS: O,PORT,BYTE
                   ;
5B5A CD9D59 OPORT:  CALL    READHL   ;PORT
5B5D 4D             MOV     C,L
5B5E CD9D59         CALL    READHL   ;DATA
5B61 3ED3           MVI     A,OUTC   ;OUT OPCODE
                   ;
                   ; EMULATE Z80 INP AND OUTP FOR 8080
                   ;
5B63 32A057 PUTIO:  STA     PORTN    ;IN OR OUT CODE
5B66 79             MOV     A,C      ;PORT NUMBER
5B67 32A157         STA     PORTN+1
5B6A 3EC9           MVI     A,RETC   ;RET OPCODE
5B6C 32A257         STA     PORTN+2
5B6F 7D             MOV     A,L      ;OUTPUT BYTE
5B70 C3A057         JMP     PORTN    ;EXECUTE
```

If you have a set of front panel switches, give the command

```
>IFF
```

and see if the bit pattern matches the actual switch setting. Next, try to ring your console bell by sending a binary 7.

```
>011 7
```

The value of 11 should be changed to your console data port address if it is different.

Modern serial and parallel ports need to be initialized before use. These initialization routines could be placed in the monitor cold-start routines. Initialization can also be performed with the new monitor output command. A Motorola 6850 serial port can be initialized for one stop bit with the two commands

```
>010 3          <reset>
>010 15         <set>
```

where 10 is the address of the status/control port.

VERSION 14: HEXADECIMAL ARITHMETIC

A routine for obtaining the sum and difference of two hexadecimal numbers will now be added. Change the version number to 14. Change the branch table corresponding to the entry H.

```
DW        HMATH     ;H, HEX MATH
```

Place the remaining new lines at the end as usual.

```
Listing 6.14. Hecadecimal addition and subtraction.

                  ; HEXADECIMAL MATH, SUM AND DIFFERENCE
                  ;
5B73 CD9159   HMATH:  CALL    HHLDE    ;TWO NUMBERS
5B76 E5               PUSH    H        ;SAVE H,L
5B77 19               DAD     D        ;SUM
5B78 CDDF59           CALL    OUTHL    ;PRINT IT
5B7B E1               POP     H
5B7C 7D               MOV     A,L
5B7D 93               SUB     E        ;LOW BYTES
5B7E 6F               MOV     L,A
5B7F 7C               MOV     A,H
5B80 9A               SBB     D
5B81 67               MOV     H,A      ;HIGH BYTES
5B82 C3DF59           JMP     OUTHL    ;DIFFERENCE
```

The new feature is executed by typing the letter H and the hex numbers. The response is the sum and the difference.

```
>H8000 4000
C000 4000
```

VERSION 15: MEMORY-TEST PROGRAM

Back in version 6, we installed an automatic memory-size routine. This addition performs a memory check of sorts by testing the first byte of each page. In version 15, we will add a more complete memory-test program. Change the version number and the branch table entry for the letter J (justification):

```
DW      JUST    ;J, MEMORY TEST
```

Then, type in the new lines as shown in Listing 6.15.

```
Listing 6.15. A memory-test program.
                ;
                ; MEMORY TEST
                ; THAT DOESN'T ALTER CURRENT BYTE
                ; INPUT RANGE OF ADDRESSES, ABORT WITH ^X
                ;
5B85 CD8659     JUST:   CALL    RDHLDE  ;RANGE
5B88 E5                 PUSH    H       ;SAVE START ADDR
5B89 7E         JUST2:  MOV     A,M     ;GET BYTE
5B8A 2F                 CMA             ;COMPLEMENT IT
5B8B 77                 MOV     M,A     ;PUT IT BACK
5B8C BE                 CMP     M       ;DID IT GO?
5B8D C2A55B             JNZ     JERR    ;NO
5B90 2F                 CMA             ;ORIGINAL BYTE
5B91 77                 MOV     M,A     ;PUT IT BACK
5B92 7D         JUST3:  MOV     A,L     ;PASS
5B93 93                 SUB     E       ; COMPLETED?
5B94 7C                 MOV     A,H
5B95 9A                 SBB     D
5B96 23                 INX     H
5B97 DA895B             JC      JUST2   ;NO
                ;
                ; AFTER EACH PASS,
                ; SEE IF ABORT WANTED
                ;
5B9A CD2558             CALL    INSTAT  ;INPUT?
5B9D C41558             CNZ     INPUTT  ;YES, GET IT
5BA0 E1                 POP     H       ;START ADDR
5BA1 E5                 PUSH    H       ;SAVE AGAIN
5BA2 C3895B             JMP     JUST2   ;NEXT PASS
                ;
                ; FOUND MEMORY ERROR, PRINT POINTER AND
                ; BIT MAP: 0=GOOD, 1=BAD BIT
                ;
5BA5 F5         JERR:   PUSH    PSW     ;SAVE COMPLEMENT
5BA6 CDDC59             CALL    CRHL    ;PRINT POINTER
5BA9 F1                 POP     PSW
5BAA AE                 XRA     M       ;SET BAD BITS
5BAB E5                 PUSH    H       ;SAVE POINTER
5BAC 6F                 MOV     L,A     ;BIT MAP TO L
5BAD CD4A5B             CALL    BITS    ;PRINT BINARY
5BB0 E1                 POP     H
5BB1 C3925B             JMP     JUST3   ;CONTINUE
```

Assemble the program, load it into memory, and try it out. The memory range from zero to 58FF hex is tested with the command

```
>JO 5800
```

This is a continuing test. The given range is tested over and over until aborted with a control-X command. This memory-test program is not very sophisticated. The routine will not find unusual problems in flakey, dynamic memories. It will, however, locate those regions with no memory, protected memory, and grossly defective memory. The address of each bad location is printed in hex, then the bit pattern follows. ASCII ones are shown for the bad bits and ASCII zeros are given for the good bits.

The test program gets the original memory byte, complements it, and puts it back. It then complements it a second time and restores the original byte. Thus, the original memory is left intact. The only caution here is that the stack area should not be tested.

Much more sophisticated memory test programs are needed for difficult memory errors. Of course, such programs will require a lot of memory, and so would not fit into a compact system monitor. One feature of such a program is to provide a delay between the time the test byte is placed into memory and the time that the byte is checked. One disadvantage of a more powerful memory-test program is that it does not protect the original memory contents.

VERSION 16: REPLACE ONE BYTE WITH ANOTHER

In version 11 we added a memory-search routine. This feature gives us the ability to find every occurrence of a particular byte. A companion feature added in version 16 allows us to change every occurrence of a particular byte to a different byte. Change the version number and the branch table corresponding to the letter R.

```
DW        REPL     ;R, REPLACE
```

Add the new lines shown in listing 6.16 to the end of the program.

```
      Listing 6.16. Replace one hex byte with another.

                  ; REPLACE HEX BYTE WITH ANOTHER
                  ; OVER GIVEN RANGE
                  ; FORMAT IS: START, STOP, ORIG, NEW
                  ;
5BB4 CD7C5A    REPL:   CALL     HLDEBC   ;RANGE, 1ST BYTE
5BB7 DAD459            JC       ERROR    ;NO 2ND
5BBA 41               MOV      B,C      ;1ST TO B
5BBB E5               PUSH     H
```

```
5BBC  CD9D59              CALL    READHL    ;2ND BYTE
5BBF  4D                  MOV     C,L       ;INTO C
5BC0  E1                  POP     H
5BC1  7E          REPL2:  MOV     A,M       ;FETCH BYTE
5BC2  B8                  CMP     B         ;A MATCH?
5BC3  C2CC5B              JNZ     REPL3     ;NO
5BC6  71                  MOV     M,C       ;SUBSTITUTE
5BC7  79                  MOV     A,C
5BC8  BE                  CMP     M         ;SAME?
5BC9  C2435A              JNZ     ERRB      ;NO, BAD
5BCC  CD005A      REPL3:  CALL    TSTOP     ;DONE?
5BCF  C3C15B              JMP     REPL2
```

Assemble version 16 and try it out. Move three lines of the monitor's code to a lower place using the M command.

```
>M5800 582F 4000
```

Dump these three lines of memory with the D command.

```
>D4000 402F
```

Change every occurrence of the byte C3 found in those lines to a 40 hex using the command

```
>R4000 402F C3 40
```

Notice that a space must separate the two bytes C3 and 40. Now, dump this portion of memory with the command

```
>D4000 402F
```

The new byte is an ASCII "at" sign (@), therefore it will show up clearly on the ASCII portion of the dump.

The replace routine can be useful for relocating a short executable program. Suppose that a routine is programmed for execution at 3000 hex. It can be moved to 4000 hex with the block-move command

```
>M3000 3FFF 4000
```

However, the program will not run at the new location if there are absolute jumps present. The high byte of each jump address will have to be changed from 30 to 40 in this case. The search routine can be used to find all occurrences of 30 hex in the program.

```
>S4000 4FFF 30
```

Then the replace command can be given to convert each 30 hex into a 40 hex.

```
>R4000 4FFF 30 40
```

Another use for the replace command is to convert an assembly language source file from one format to another. For example, the CP/M format requires a line feed to follow a carriage return. But another assembler may generate lines in which only the carriage return is placed at the end of each line. In this case, the original file can be loaded into memory. Then, all of the carriage returns (OD hex) can be replaced with an ASCII character such as a # symbol (23 hex).

```
>R100 38FF OD 23
```

After the file is altered with the monitor, it can be saved on a disk. The final step can be performed with the system editor. The global replace command of this editor can be used to replace every occurrence of the # sign with a carriage-return/line-feed pair. With the Word-Master editor, the command would be

```
*MR$$\N$OTT
```

The first step required the monitor because the system editors cannot be directed to globally change a carriage return to something else. The carriage-return/line-feed pair must be treated as a unit.

VERSION 17: COMPARE TWO BLOCKS OF MEMORY

This last addition to our system monitor will fill out the size to just under 1K bytes. The new routine will allow us to compare two blocks of memory. If discrepancies are found, the address and the contents of the appropriate location in both blocks will be shown. Change the version number and the branch table corresponding to the letter R.

```
DW      VERM    ;V
```

Add the new lines shown in Listing 6.17.

```
        Listing 6.17. Compare two blocks of memory.

                    ; GIVE RANGE OF 1ST BLOCK
                    ; AND START OF SECOND
                    ;
    5BD2 CD7C5A     VERM:   CALL    HLDEBC  ;3 ADDRESSES
    5BD5 0A         VERM2:  LDAX    B       ;FETCH BYTE
    5BD6 BE                 CMP     M       ;SAME AS OTHER?
    5BD7 CAF35B             JZ      VERM3   ;YES
    5BDA E5                 PUSH    H       ;DIFFERENT
    5BDB C5                 PUSH    B
    5BDC CDDC59             CALL    CRHL    ;PRINT 1ST POINTER
    5BDF 4E                 MOV     C,M     ;FIRST BYTE
    5BE0 CDE459             CALL    OUTHEX  ;PRINT IT
    5BE3 3E3A               MVI     A,':'
```

```
5BE5 CD2A58          CALL    OUTT
5BE8 E1              POP     H        ;B,C TO H,L
5BE9 CDDF59          CALL    OUTHL    ;SECOND POINTER
5BEC 4E              MOV     C,M      ;2ND BYTE
5BED CDEC59          CALL    OUTHX    ;PRINT IT
5BF0 4D              MOV     C,L      ;RESTORE C
5BF1 44              MOV     B,H      ;AND B
5BF2 E1              POP     H        ;AND H,L
5BF3 CD005A   VERM3: CALL    TSTOP    ;DONE?
5BF6 03              INX     B        ;2ND POINTER
5BF7 C3D55B          JMP     VERM2
```

The symbol table should now look like this.

```
5B07 ADMP2     5B23 ADMP3     5B26 ADMP4     5B04 ADUMP
5AED ALOD2     00F7 APOS      5AD5 ASCII     5B2C ASCS
0008 BACKUP    5B4C BIT2      5B4A BITS      5A09 CALLS
0011 CDATA     0011 CDATAO    5A3E CHEKM     5809 CIN
5858 COLD      5806 COUT      000D CR        59DC CRHL
590F CRLF      0010 CSTAT     0010 CSTATO    0008 CTRH
0011 CTRQ      0013 CTRS      0018 CTRX      007F DEL
5945 DUMP      5948 DUMP2     594B DUMP3     595E DUMP4
5967 DUMP5     5A45 ERR2      5A43 ERRB      59D4 ERROR
5A42 ERRP      001B ESC       5A5D FILL      5A66 FILL2
5A6C FILL3     5A75 FILL4     580F GCHAR     5939 GETC4
5925 GETCH     5A08 GO        59F5 HEX1      5991 HHLDE
5A7C HLDEBC    5A8A HLDECK    5B73 HMATH     57A5 IBUFC
57A6 IBUFF     57A3 IBUFP     00DB INC       580C INLN
0001 INMSK     58D5 INPL2     58F1 INPL3     5919 INPLB
5901 INPLC     58FB INPLE     58DD INPLI     58D0 INPLN
581B INPUT2    5815 INPUTT    5825 INSTAT    5B3D IPORT
5BA5 JERR      5B85 JUST      5B89 JUST2     5B92 JUST3
000A LF        5A0D LOAD      5A10 LOAD2     5A33 LOAD3
5A30 LOAD4     5A37 LOAD6     5A96 MOVDN     5A93 MOVE
5AA0 MOVIN     5878 MSIZE     59C4 NIB       586A NPAGE
0002 OMSK      5B5A OPORT     5800 ORGIN     582B OUT2
5839 OUT3      5844 OUT4      00D3 OUTC      5812 OUTH
59E4 OUTHEX    59DF OUTHL     59EC OUTHX     59E3 OUTLL
59E7 OUTSP     582A OUTT      5981 PASC2     5983 PASC3
5976 PASCI     57A0 PORTN     5B63 PUTIO     59A2 RDHL2
59B7 RDHL4     59C1 RDHL5     5989 RDHLD2    5986 RDHLDE
599D READHL    5A4E REGS      5BB4 REPL      5BC1 REPL2
5BCC REPL3     5803 RESTRT    00C9 RETC      5AAD SEAR2
5AB8 SEAR3     5ACF SEAR4     5AC9 SEAR5     5AAA SEARCH
593B SENDM     584F SIGNON    57A0 STACK     5800 START
0009 TAB       589C TABLE     0018 TOP       5A00 TSTOP
5BD2 VERM      5BD5 VERM2     5BF3 VERM3     3731 VERS
5861 WARM      5A55 ZERO
```

Try the new addition by first moving a copy of the monitor down to a lower
memory location.

```
>M5800 5BFF 4800
```

Then verify that the two copies are the same.

```
>V5800 5BFF 4800
```

Of course this step is not necessary, since there is a verification step included in the block-move routine. Change one byte in the new location so that there will be a difference.

```
>L4820
4820 . XX 0      <zero location 4820>
.  .  .      +X    <quit>
```

Then, give the verification command again.

```
>V5800 5BFF 4800
```

Because you changed one byte of the copy, there should be an indication of error.

This compare routine completes the 1K 8080 system monitor. We have incorporated many useful features into a minimum of space. We have carefully distinguished program code from data code so that the monitor can be placed into ROM or PROM.

AUTOMATIC EXECUTION OF THE MONITOR

If you program the monitor into ROM, it will be ready to use each time the computer is turned on. On the other hand, you may want to copy it from disk into memory each time it is needed. We have been loading the monitor with the system debugger each time it is needed. But it is easier to include a short loader program at the beginning of the monitor. Then you can execute the monitor just by typing its name.

A suitable loader program is given in Listing 6.18. Type the program into your editor. There are two locations that need to be matched to your monitor; these are the addresses of START and FINAL. START must correspond to the first address of your monitor. The address FINAL is the last address of the monitor.

```
     Listing 6.18. Loader program to move the monitor.

5800 =           START  EQU    5800H    ;MONITOR START
5BFF =           FINAL  EQU    5BFFH    ;MONITOR END
A920 =           OFFST  EQU    120-START ;LOAD OFFSET
                 ;
0100             ORG    100H             ;START HERE
                 ;
0100 210058             LXI    H,START  ;NEW START
0103 012001             LXI    B,120H   ;OLD START
0106 11FF5B             LXI    D,FINAL
                 ;
0109 0A        LOOP:    LDAX   B        ;GET A BYTE
010A 77                 MOV    M,A      ;TO NEW PLACE
010B BE                 CMP    M        ;DID IT GO?
```

```
010C C20000        JNZ    0        #NO, QUIT
010F 23            INX    H        #INCREMENT
0110 03            INX    B        #  POINTERS
0111 7B            MOV    A,E      #DONE?
0112 95            SUB    L
0113 7A            MOV    A,D
0114 9C            SBB    H
0115 D20901        JNC    LOOP     #KEEP GOING
0118 C30058        JMP    START    #DONE
                 ;
011B               END
```

Assemble the loader program, then load it into memory with the debugger SID or DDT.

```
A>DDT   MOVE.HEX
```

Next, place a copy of the monitor into memory starting at address 120 hex. If the monitor is already in memory, a copy can be generated with the monitor itself. DDT or SID can also be used for this task. The command is

```
M5800 5BFF 120
```

If the monitor resides on disk as a hex file, it can be loaded with the debugger after you calculate the offset. The offset is necessary since hex files are normally loaded at the operating address, but we want to put it somewhere else.

The required offset should be given in the assembly listing of the loader program as the value of the equate OFFST. If your assembler doesn't print such values, then use the debugger to calculate the value.

```
H120    5800   <starting value of monitor>
5920    A920
<sum>   <difference>
```

Give the commands

```
IMON17.HEX
R<offset>
```

so that the monitor will be loaded starting at address 120 hex.

Return to the CP/M system

```
GO      <go to zero>
```

and save the combination

```
A>SAVE   5   MONITOR.COM
```

From now on, all you have to do is type the command

```
A>MONITOR
```

and the monitor will automatically start up.

What actually happens is that the combination of the monitor and the loader program is first copied into memory at 100 hex. The move program relocates the monitor from address 120 hex to its proper place. Then control is transferred to the monitor. As each byte is moved to the new location, it is checked to see that it actually got there. If not, the process is terminated and control returns to CP/M.

This short loader can be placed on the front of any program that must be relocated. Only the first two instructions may have to be changed to reflect the proper starting and ending addresses.

In the next chapter, we will convert our monitor to Z-80 code. The Z-80 version will be smaller so that we can incorporate a few additional features and still be able to fit the program into 1K of ROM. The features in the next chapter can be incorporated in the 8080 version, but they will take so much space that the monitor will no longer fit into 1K bytes.

CHAPTER SEVEN

A Z-80 System Monitor

The system monitor developed in Chapter 6 contains many features. Since the size is less than 1,024 bytes, it will easily fit into a 1K PROM, such as the 2708 EPROM. It can then be ready for use as soon as the computer is turned on. But, in this case, it may be necessary to include a routine to initialize the peripheral ports, such as those that handle the console and printer. In addition, you might want to send output to a printer as well as to the video console. If these two features are added to the monitor, the size will increase beyond 1K bytes and it will not fit into a single 1K PROM.

One way to add these new features without increasing the monitor's size is to remove some of the original routines. Another way, if you have a Z-80 CPU, is to convert some of the instructions to the more compact Z-80 equivalent operations. The latter approach will be followed in this chapter. Listing 7.1 gives the final version with all changes discussed in this chapter. The symbol table at the end can be used to find the routines of interest.

```
Listing 7.1 The Z-80 version of the system monitor.

                  TITLE    Z-80 SYSTEM MONITOR
                  ;
                  ; (Date goes here)
                  ;
                  ; FOUR SECTIONS HAVE BEEN REMOVED:
                  ;   VERS EQU       ...      (1 LINE)
                  ;   SIGNON:        ...      (4 LINES)
                  ;   LXI    D,SIGNON         (2 LINES)
                  ;   SENDM:         ...      (6 LINES)
                  ;
                  ; ONE SECTION HAS BEEN ADDED:
                  ;   LIST OUPUT ROUTINES
                  ;
        0018      TOP      EQU      24        ;MEMORY TOP, K BYTES
        5800      ORGIN    EQU      (TOP-2)*1024  ;PROGRAM START
                  ;
```

```
0000                    ASEG                    ;ABSOLUTE CODE
                        .Z80
                        ORG       ORGIN
                        ;
57A0                    STACK     EQU     ORGIN-60H
0010                    CSTAT     EQU     10H       ;CONSOLE STATUS
0011                    CDATA     EQU     CSTAT+1   ;CONSOLE DATA
0001                    INMSK     EQU     1         ;INPUT MASK
0002                    OMSK      EQU     2         ;OUTPUT MASK
0012                    LSTAT     EQU     12H       ;LIST STATUS   (18)
0013                    LDATA     EQU     LSTAT+1   ;LIST DATA     (18)
0002                    LOMSK     EQU     2         ;OUTPUT MASK   (18)
0004                    NNULS     EQU     4         ;LIST NULLS    (18)
                        ;
57A0                    PORTN     EQU     STACK     ;CONS=0,LIST=1
57A3                    IBUFP     EQU     STACK+3   ;BUFFER POINTER
57A5                    IBUFC     EQU     IBUFP+2   ;BUFFER COUNT
57A6                    IBUFF     EQU     IBUFP+3   ;INPUT BUFFER
                        ;
0008                    CTRH      EQU     8         ;^H BACKSPACE
0009                    TAB       EQU     9         ;^I
0010                    CTRP      EQU     16        ;^P (18)
0011                    CTRQ      EQU     17        ;^Q
0013                    CTRS      EQU     19        ;^S
0018                    CTRX      EQU     24        ;^X, ABORT
0008                    BACKUP    EQU     CTRH      ;BACKUP CHAR
007F                    DEL       EQU     127       ;RUBOUT
00F7                    APOS      EQU     (39-'0') AND 0FFH
000D                    CR        EQU     13        ;CARRIAGE RET
000A                    LF        EQU     10        ;LINE FEED
                        ;
                        START:
5800 C3 587E            JP        COLD      ;COLD START
5803 C3 5891            RESTRT:   JP        WARM      ;WARM START
                        ;
                        ; VECTORS TO USEFUL ROUTINES
                        ;
5806 C3 5835            COUT:     JP        OUTT      ;OUTPUT CHAR
5809 C3 5815            CIN:      JP        INPUTT    ;INPUT CHAR
580C C3 58FD            INLN:     JP        INPLN     ;INPUT LINE
580F C3 5949            GCHAR:    JP        GETCH     ;GET CHAR
5812 C3 59F8            OUTH:     JP        OUTHX     ;BIN TO HEX
                        ;
                        ; CONSOLE INPUT ROUTINE
                        ; CHECK FOR CONTROL-P, LIST TOGGLE
                        ;
5815 CD 5827            INPUTT:   CALL      INSTAT    ;CHECK STATUS
5818 28 FB                        JR        Z,INPUTT  ;NOT READY
581A DB 11              INPUT2:   IN        A,(CDATA) ;GET BYTE
581C E6 7F                        AND       DEL
581E FE 18                        CP        CTRX      ;ABORT?
5820 28 DE                        JR        Z,START   ;YES
5822 FE 10                        CP        CTRP      ;^P?
5824 28 06                        JR        Z,SETLST  ;LIST
5826 C9                           RET
                        ;
                        ; GET CONSOLE-INPUT STATUS
                        ;
```

```
5827 DB 10        INSTAT:  IN      A,(CSTAT)
5829 E6 01                 AND     INMSK
582B C9                    RET
                  ;
                  ; TOGGLE LIST OUTPUT WITH CONTROL-P
                  ;
582C 3A 57A0      SETLST:  LD      A,(PORTN) ;CHECK FLAG
582F 2F                    CPL               ;INVERT
5830 32 57A0               LD      (PORTN),A ;SAVE
5833 18 E0                 JR      INPUTT    ;NEXT BYTE
                  ;
                  ; CONSOLE OUTPUT ROUTINE
                  ;
5835 F5           OUTT:    PUSH    AF
5836 3A 57A0               LD      A,(PORTN) ;WHERE?
5839 B7                    OR      A         ;ZERO?
583A 20 1F                 JR      NZ,LOUT   ;LIST OUTPUT
583C CD 5827      OUT2:    CALL    INSTAT    ;INPUT?
583F 28 10                 JR      Z,OUT4    ;NO
5841 CD 581A               CALL    INPUT2    ;GET INPUT
5844 FE 13                 CP      CTRS      ;FREEZE?
5846 20 F4                 JR      NZ,OUT2   ;NO
5848 CD 5815      OUT3:    CALL    INPUTT    ;INPUT?
584B FE 11                 CP      CTRQ      ;RESUME?
584D 20 F9                 JR      NZ,OUT3   ;NO
584F 18 EB                 JR      OUT2
                  ;
5851 DB 10        OUT4:    IN      A,(CSTAT) ;GET STATUS
5853 E6 02                 AND     OMSK
5855 28 E5                 JR      Z,OUT2    ;NOT READY
5857 F1                    POP     AF
5858 D3 11                 OUT     (CDATA),A ;SEND DATA
585A C9                    RET
                  ;
                  ; LIST OUTPUT ROUTINE
                  ; SEND TO CONSOLE TOO
                  ;
585B CD 5827      LOUT:    CALL    INSTAT    ;INPUT?
585E C4 581A               CALL    NZ,INPUT2 ;YES, GET IT
                  ;
5861 DB 12                 IN      A,(LSTAT) ;CHECK STATUS
5863 E6 02                 AND     OMSK
5865 28 F4                 JR      Z,LOUT    ;NOT READY
5867 F1                    POP     AF
5868 D3 13                 OUT     (LDATA),A ;SEND DATA
586A D3 11                 OUT     (CDATA),A ;CONSOLE TOO
586C E6 7F                 AND     7FH       ;MASK PARITY
                  ;
                  ; ADD TIME DELAY AFTER CARRIAGE RETURN
                  ;
586E FE 0D                 CP      CR        ;CARRIAGE RET?
5870 C0                    RET     NZ        ;NO
5871 D5                    PUSH    DE        ;USE D,E
5872 16 78                 LD      D,30 * NNULS
5874 1E FA        OUTCR:   LD      E,250
5876 1D           OUTCR2:  DEC     E
5877 20 FD                 JR      NZ,OUTCR2 ;INNER LOOP
5879 15                    DEC     D
```

```
587A 20 F8                      JR      NZ,OUTCR  ;OUTER LOOP
587C D1                         POP     DE        ;RESTORE
587D C9                         RET
                        ;
                        ; CONTINUATION OF COLD START
                        ;
587E 31 57A0    COLD:   LD      SP,STACK
                        ;
                        ; INITIALIZE I/O PORTS
                        ;
5881 3E 03                      LD      A,3
5883 D3 10                      OUT     (CSTAT),A ;RESET
5885 D3 12                      OUT     (LSTAT),A
5887 3E 15                      LD      A,15H
5889 D3 10                      OUT     (CSTAT),A ;SET
588B D3 12                      OUT     (LSTAT),A
588D AF                         XOR     A       ;GET A ZERO
588E 32 57A0                    LD      (PORTN),A ;RESET
                        ;
                        ; WARM-START ENTRY
                        ;
5891 21 5891    WARM:   LD      HL,WARM ;RET TO
5894 E5                         PUSH    HL       ; HERE
                        ;
                        ; FIND TOP OF USABLE MEMORY.
                        ; CHECK FIRST BYTE OF EACH PAGE OF MEMORY
                        ; STARTING AT ADDRESS ZERO.  STOP AT STACK
                        ; OR MISSING/DEFECTIVE/PROTECTED MEMORY.
                        ; DISPLAY HIGH BYTE OF MEMORY TOP.
                        ;
5895 21 0000                    LD      HL,0     ;PAGE ZERO
5898 06 57                      LD      B,HIGH STACK ;STOP HERE
589A 7E         NPAGE:  LD      A,(HL)  ;GET BYTE
589B 2F                         CPL             ;COMPLEMENT
589C 77                         LD      (HL),A  ;PUT IT BACK
589D BE                         CP      (HL)    ;SAME?
589E 20 05                      JR      NZ,MSIZE ;NO, MEM TOP
58A0 2F                         CPL             ;ORIG BYTE
58A1 77                         LD      (HL),A  ;RESTORE IT
58A2 24                         INC     H       ;NEXT PAGE
58A3 10 F5                      DJNZ    NPAGE    ;KEEP GOING
58A5 4C         MSIZE:  LD      C,H     ;MEM TOP
58A6 CD 5935                    CALL    CRLF     ;NEW LINE
58A9 CD 59F8                    CALL    OUTHX    ;PRINT MEM SIZE
58AC CD 58FD                    CALL    INPLN    ;CONSOLE LINE
58AF CD 5949                    CALL    GETCH    ;FIRST CHAR
                        ;
                        ; MAIN COMMAND PROCESSOR
                        ;
58B2 D6 41                      SUB     'A'      ;CONVERT OFFSET
58B4 DA 59E0                    JP      C,ERROR ; < A
58B7 FE 1A                      CP      'Z'-'A'+1
58B9 D2 59E0                    JP      NC,ERROR ; > Z
58BC 87                         ADD     A,A      ;DOUBLE
58BD 21 58C9                    LD      HL,TABLE ;START
58C0 16 00                      LD      D,0
58C2 5F                         LD      E,A      ;OFFSET
58C3 19                         ADD     HL,DE    ;ADD TO TABLE
```

```
58C4 5E                    LD      E,(HL)   ;LOW BYTE
58C5 23                    INC     HL
58C6 56                    LD      D,(HL)   ;HIGH BYTE
58C7 EB                    EX      DE,HL    ;INTO H,L
58C8 E9                    JP      (HL)     ;GO THERE
                   ;
                   ; COMMAND TABLE
                   ;
58C9 5AD3          TABLE:  DW      ASCII    ;A, DUMP,LOAD
58CB 59E0                  DW      ERROR    ;B
58CD 5A15                  DW      CALLS    ;C, SUBROUTINE
58CF 595E                  DW      DUMP     ;D, DUMP
58D1 59E0                  DW      ERROR    ;E
58D3 5A64                  DW      FILL     ;F, MEMORY
58D5 5A14                  DW      GO       ;G, GO
58D7 5B51                  DW      HMATH    ;H, HEX MATH
58D9 5B31                  DW      IPORT    ;I, PORT INPUT
58DB 5B60                  DW      JUST     ;J, MEMORY TEST
58DD 59E0                  DW      ERROR    ;K
58DF 5A19                  DW      LOAD     ;L, LOAD
58E1 5A97                  DW      MOVE     ;M, MEMORY
58E3 59E0                  DW      ERROR    ;N
58E5 5B47                  DW      OPORT    ;O, PORT OUTPUT
58E7 59E0                  DW      ERROR    ;P
58E9 59E0                  DW      ERROR    ;Q
58EB 5B8C                  DW      REPL     ;R, REPLACE
58ED 5AAD                  DW      SEARCH   ;S, MEMORY
58EF 59E0                  DW      ERROR    ;T
58F1 59E0                  DW      ERROR    ;U
58F3 5BA8                  DW      VERM     ;V, VERIFY MEM
58F5 59E0                  DW      ERROR    ;W
58F7 5A56                  DW      REGS     ;X, STK PNTR
58F9 59E0                  DW      ERROR    ;Y
58FB 5A5D                  DW      ZERO     ;Z, MEMORY
                   ;
                   ; INPUT A LINE FROM CONSOLE AND PUT IT
                   ; INTO THE BUFFER. CARRIAGE RETURN ENDS
                   ; THE LINE. RUBOUT OR ^H CORRECTS LAST
                   ; LAST ENTRY. CONTROL-X RESTARTS LINE.
                   ; OTHER CONTROL CHARACTERS ARE IGNORED
                   ;
58FD 3E 3E         INPLN:  LD      A,'>'    ;PROMPT
58FF CD 5835               CALL    OUTT
5902 21 57A6       INPL2:  LD      HL,IBUFF ;BUFFER ADDR
5905 22 57A3               LD      (IBUFP),HL ;SAVE POINTER
5908 0E 00                 LD      C,0      ;COUNT
590A CD 5815       INPLI:  CALL    INPUTT   ;CONSOLE CHAR
590D FE 20                 CP      ' '      ;CONTROL?
590F 38 18                 JR      C,INPLC  ;YES
5911 FE 7F                 CP      DEL      ;DELETE
5913 28 2A                 JR      Z,INPLB  ;YES
5915 FE 5B                 CP      'Z'+1    ;UPPER CASE?
5917 38 02                 JR      C,INPL3  ;YES
5919 E6 5F                 AND     5FH      ;MAKE UPPER
591B 77            INPL3:  LD      (HL),A   ;INTO BUFFER
591C 3E 20                 LD      A,32     ;BUFFER SIZE
591E B9                    CP      C        ;FULL?
591F 28 E9                 JR      Z,INPLI  ;YES, LOOP
```

```
5921 7E                          LD      A,(HL)   ;GET CHAR
5922 23                          INC     HL       ;INCR POINTER
5923 0C                          INC     C        ;AND COUNT
5924 CD 5835        INPLE:       CALL    OUTT     ;SHOW CHAR
5927 18 E1                       JR      INPLI    ;NEXT CHAR
                    ;
                    ; PROCESS CONTROL CHARACTER
                    ;
5929 FE 08          INPLC:       CP      CTRH     ;^H?
592B 28 12                       JR      Z,INPLB  ;YES
592D FE 0D                       CP      CR       ;RETURN?
592F 20 D9                       JR      NZ,INPLI ;NO, IGNORE
                    ;
                    ; END OF INPUT LINE
                    ;
5931 79                          LD      A,C      ;COUNT
5932 32 57A5                     LD      (IBUFC),A ;SAVE
                    ;
                    ; CARRIAGE-RETURN, LINE-FEED ROUTINE
                    ;
5935 3E 0D          CRLF:        LD      A,CR
5937 CD 5835                     CALL    OUTT     ;SEND CR
593A 3E 0A                       LD      A,LF
593C C3 5835                     JP      OUTT     ;SEND LF
                    ;
                    ; DELETE PRIOR CHARACTER IF ANY
                    ;
593F 79             INPLB:       LD      A,C      ;CHAR COUNT
5940 B7                          OR      A        ;ZERO?
5941 28 C7                       JR      Z,INPLI  ;YES
5943 2B                          DEC     HL       ;BACK POINTER
5944 0D                          DEC     C        ;AND COUNT
5945 3E 08                       LD      A,BACKUP ;CHARACTER
5947 18 DB                       JR      INPLE    ;SEND
                    ;
                    ; GET A CHARACTER FROM CONSOLE BUFFER
                    ; SET CARRY IF EMPTY
                    ;
5949 E5             GETCH:       PUSH    HL       ;SAVE REGS
594A 2A 57A3                     LD      HL,(IBUFP) ;GET POINTER
594D 3A 57A5                     LD      A,(IBUFC) ;AND COUNT
5950 D6 01                       SUB     1        ;DECR WITH CARRY
5952 38 08                       JR      C,GETC4  ;NO MORE CHAR
5954 32 57A5                     LD      (IBUFC),A ;SAVE NEW COUNT
5957 7E                          LD      A,(HL)   ;GET CHARACTER
5958 23                          INC     HL       ;INCR POINTER
5959 22 57A3                     LD      (IBUFP),HL ;AND SAVE
595C E1             GETC4:       POP     HL       ;RESTORE REGS
595D C9                          RET
                    ;
                    ; DUMP MEMORY IN HEXADECIMAL AND ASCII
                    ;
595E CD 5999        DUMP:        CALL    RDHLDE   ;RANGE
5961 CD 59E8        DUMP2:       CALL    CRHL     ;NEW LINE
5964 4E             DUMP3:       LD      C,(HL)   ;GET BYTE
5965 CD 59F8                     CALL    OUTHX    ;PRINT
5968 23                          INC     HL       ;POINTER
5969 7D                          LD      A,L
```

```
596A E6 0F                    AND     0FH       ;LINE END?
596C 28 07                    JR      Z,DUMP4   ;YES, ASCII
596E E6 03                    AND     3         ;SPACE
5970 CC 59F3                  CALL    Z,OUTSP   ; 4 BYTES
5973 18 EF                    JR      DUMP3     ;NEXT HEX
5975 CD 59F3    DUMP4:        CALL    OUTSP
5978 D5                       PUSH    DE
5979 11 FFF0                  LD      DE,-10H   ;RESET LINE
597C 19                       ADD     HL,DE
597D D1                       POP     DE
597E CD 598B    DUMP5:        CALL    PASCI     ;ASCII DUMP
5981 CD 5A0C                  CALL    TSTOP     ;DONE?
5984 7D                       LD      A,L       ;NO
5985 E6 0F                    AND     0FH       ;LINE END?
5987 20 F5                    JR      NZ,DUMP5  ;NO
5989 18 D6                    JR      DUMP2
                ;
                ; DISPLAY MEMORY BYTE IN ASCII IF
                ; POSSIBLE, OTHERWISE GIVE DECIMAL PNT
                ;
598B 7E         PASCI:        LD      A,(HL)    ;GET BYTE
598C FE 7F                    CP      DEL       ;HIGH BIT ON?
598E 30 04                    JR      NC,PASC2  ;YES
5990 FE 20                    CP      ' '       ;CONTROL CHAR?
5992 30 02                    JR      NC,PASC3  ;NO
5994 3E 2E      PASC2:        LD      A,'.'     ;CHANGE TO DOT
5996 C3 5835    PASC3:        JP      OUTT      ;SEND
                ;
                ; GET H,L AND D,E FROM CONSOLE
                ; CHECK THAT D,E IS LARGER
5999 CD 59A3    RDHLDE:       CALL    HHLDE
599C 7B         RDHLD2:       LD      A,E
599D 95                       SUB     L         ;E - L
599E 7A                       LD      A,D
599F 9C                       SBC     A,H       ;D - H
59A0 38 3E                    JR      C,ERROR   ;H,L BIGGER
59A2 C9                       RET
                ;
                ; INPUT H,L AND D,E
                ;
59A3 CD 59AE    HHLDE:        CALL    READHL    ;H,L
59A6 38 38                    JR      C,ERROR   ;ONLY 1 ADDR
59A8 EB                       EX      DE,HL     ;SAVE IN D,E
59A9 CD 59AE                  CALL    READHL    ;D,E
59AC EB                       EX      DE,HL     ;PUT BACK
59AD C9                       RET
                ;
                ; INPUT H,L FROM CONSOLE
                ;
59AE D5         READHL:       PUSH    DE
59AF C5                       PUSH    BC        ;SAVE REGS
59B0 21 0000                  LD      HL,0      ;CLEAR
59B3 CD 5949    RDHL2:        CALL    GETCH     ;GET CHAR
59B6 38 15                    JR      C,RDHL5   ;LINE END
59B8 CD 59D0                  CALL    NIB       ;TO BINARY
59BB 38 08                    JR      C,RDHL4   ;NOT HEX
59BD 29                       ADD     HL,HL     ;SHIFT LEFT
59BE 29                       ADD     HL,HL     ; FOUR
```

```
59BF 29                        ADD      HL,HL    ; BYTES
59C0 29                        ADD      HL,HL
59C1 B5                        OR       L        ;ADD NEW CHAR
59C2 6F                        LD       L,A
59C3 18 EE                     JR       RDHL2    ;NEXT
                      ;
                      ; CHECK FOR COMMA OR BLANK AT END
                      ;
59C5 FE F7     RDHL4:  CP       APOS     ;APOSTROPHE
59C7 28 04             JR       Z,RDHL5  ;ASCII INPUT
59C9 FE F0             CP       (' '-'0') AND 0FFH
59CB 20 13             JR       NZ,ERROR ;NOT BLANK
59CD C1        RDHL5:  POP      BC
59CE D1                POP      DE       ;RESTORE
59CF C9                RET
                      ;
                      ; CONVERT ASCII CHARACTERS TO BINARY
                      ;
59D0 D6 30     NIB:    SUB      '0'      ;ASCII BIAS
59D2 D8                RET      C        ; < 0
59D3 FE 17             CP       'F'-'0'+1
59D5 3F                CCF               ;INVERT
59D6 D8                RET      C        ;ERROR, > F
59D7 FE 0A             CP       10
59D9 3F                CCF               ;INVERT
59DA D0                RET      NC       ;NUMBER 0-9
59DB D6 07             SUB      'A'-'9'-1
59DD FE 0A             CP       10       ;REMOVE :-
59DF C9                RET               ;LETTER A-F
                      ;
                      ; PRINT ? ON IMPROPER INPUT
                      ;
59E0 3E 3F     ERROR:  LD       A,'?'
59E2 CD 5835           CALL     OUTT
59E5 C3 5800           JP       START    ;TRY AGAIN
                      ;
                      ; START NEW LINE, GIVE ADDRESS
                      ;
59E8 CD 5935   CRHL:   CALL     CRLF     ;NEW LINE
                      ;
                      ; PRINT H,L IN HEX
                      ;
59EB 4C        OUTHL:  LD       C,H
59EC CD 59F8           CALL     OUTHX    ;H
59EF 4D        OUTLL:  LD       C,L
                      ;
                      ; OUTPUT HEX BYTE FROM C AND A SPACE
                      ;
59F0 CD 59F8   OUTHEX: CALL     OUTHX
                      ;
                      ; OUTPUT A SPACE
                      ;
59F3 3E 20     OUTSP:  LD       A,' '
59F5 C3 5835           JP       OUTT
                      ;
                      ; OUTPUT A HEX BYTE FROM C
                      ; BINARY TO ASCII HEX CONVERSION
                      ;
```

```
59F8 79              OUTHX:  LD      A,C
59F9 1F                      RRA             ;ROTATE
59FA 1F                      RRA             ; FOUR
59FB 1F                      RRA             ; BITS TO
59FC 1F                      RRA             ; RIGHT
59FD CD 5A01                 CALL    HEX1    ;UPPER CHAR
5A00 79                      LD      A,C     ;LOWER CHAR
5A01 E6 0F           HEX1:   AND     0FH     ;TAKE 4 BITS
5A03 C6 90                   ADD     A,90H
5A05 27                      DAA             ;DAA TRICK
5A06 CE 40                   ADC     A,40H
5A08 27                      DAA
5A09 C3 5835                 JP      OUTT
                     ;
                     ; CHECK FOR END, H,L MINUS D,E
                     ; INCREMENT H,L
                     ;
5A0C 23              TSTOP:  INC     HL
5A0D 7B                      LD      A,E
5A0E 95                      SUB     L       ; E - L
5A0F 7A                      LD      A,D
5A10 9C                      SBC     A,H     ; D - H
5A11 D0                      RET     NC      ;NOT DONE
5A12 E1                      POP     HL      ;RAISE STACK
5A13 C9                      RET
                     ;
                     ; ROUTINE TO GO ANYWHERE IN MEMORY
                     ; FOR CALL ENTRY, ADDRESS OF WARM
                     ; IS ON STACK, SO A SIMPLE RET
                     ; WILL RETURN TO THIS MONITOR
                     ;
5A14 E1              GO:     POP     HL      ;RAISE STACK
5A15 CD 59AE         CALLS:  CALL    READHL  ;GET ADDRESS
5A18 E9                      JP      (HL)    ;GO THERE
                     ;
                     ; LOAD HEX OR ASCII CHAR INTO MEMORY
                     ; FROM CONSOLE. CHECK TO SEE IF
                     ; THE DATA ACTUALLY GOT THERE
                     ; APOSTROPHE PRECEEDS ASCII CHAR
                     ; CARRIAGE RET  PASSES OVER LOCATION
                     ;
5A19 CD 59AE         LOAD:   CALL    READHL  ;ADDRESS
5A1C CD 59EB         LOAD2:  CALL    OUTHL   ;PRINT IT
5A1F CD 598B                 CALL    PASCI   ;ASCII
5A22 CD 59F3                 CALL    OUTSP
5A25 4E                      LD      C,(HL)  ;ORIG BYTE
5A26 CD 59F0                 CALL    OUTHEX  ;HEX
5A29 E5                      PUSH    HL      ;SAVE PNTR
5A2A CD 5902                 CALL    INPL2   ;INPUT
5A2D CD 59AE                 CALL    READHL  ; BYTE
5A30 45                      LD      B,L     ; TO B
5A31 E1                      POP     HL
5A32 FE F7                   CP      APOS
5A34 28 0A                   JR      Z,LOAD6 ;ASCII INPUT
5A36 79                      LD      A,C     ;HOW MANY?
5A37 B7                      OR      A       ;NONE?
5A38 28 03                   JR      Z,LOAD3 ;YES
```

```
5A3A CD 5A46    LOAD4:  CALL    CHEKM    ;INTO MEMORY
5A3D 23         LOAD3:  INC     HL       ;POINTER
5A3E 18 DC              JR      LOAD2
                ;
                ; LOAD ASCII CHARACTER
                ;
5A40 CD 5949    LOAD6:  CALL    GETCH
5A43 47                 LD      B,A
5A44 18 F4              JR      LOAD4
                ;
                ; COPY BYTE FROM B TO MEMORY
                ; AND SEE THAT IT GOT THERE
                ;
5A46 70         CHEKM:  LD      (HL),B   ;PUT IN MEM
5A47 7E                 LD      A,(HL)   ;GET BACK
5A48 B8                 CP      B        ;SAME?
5A49 C8                 RET     Z        ;OK
5A4A F1         ERRP:   POP     AF       ;RAISE STACK
5A4B 3E 42      ERRB:   LD      A,'B'    ;BAD
5A4D CD 5835            CALL    OUTT
5A50 CD 59F3            CALL    OUTSP
5A53 C3 59EB            JP      OUTHL    ;POINTER
                ;
                ; DISPLAY STACK POINTER REGISTER
                ;
5A56 21 0000    REGS:   LD      HL,0
5A59 39                 ADD     HL,SP
5A5A C3 59EB            JP      OUTHL
                ;
                ; ZERO A PORTION OF MEMORY
                ;
5A5D CD 5999    ZERO:   CALL    RDHLDE   ;RANGE
5A60 06 00              LD      B,0
5A62 18 08              JR      FILL2
                ;
                ; FILL A PORTION OF MEMORY
                ;
5A64 CD 5A80    FILL:   CALL    HLDEBC   ;RANGE, BYTE
5A67 FE F7              CP      APOS     ;APOSTROPHE?
5A69 28 0F              JR      Z,FILL4  ;YES, ASCII
5A6B 41                 LD      B,C
5A6C 7C         FILL2:  LD      A,H      ;FILL BYTE
5A6D FE 57              CP      HIGH STACK ;TOO FAR?
5A6F D2 59E0            JP      NC,ERROR   ;YES
5A72 CD 5A46    FILL3:  CALL    CHEKM    ;PUT, CHECK
5A75 CD 5A0C            CALL    TSTOP    ;DONE?
5A78 18 F2              JR      FILL2    ;NEXT
                ;
5A7A CD 5949    FILL4:  CALL    GETCH    ;ASCII CHAR
5A7D 47                 LD      B,A
5A7E 18 F2              JR      FILL3
                ;
                ; GET H,L D,E AND B,C
                ;
5A80 CD 5A8E    HLDEBC: CALL    HLDECK   ;RANGE
5A83 DA 59E0            JP      C,ERROR  ;NO BYTE
5A86 E5                 PUSH    HL
```

```
5A87 CD 59AE              CALL     READHL    ;3RD INPUT
5A8A 44                   LD       B,H       ;MOVE TO
5A8B 4D                   LD       C,L       ; B,C
5A8C E1                   POP      HL
5A8D C9                   RET
                    ;
                    ; GET 2 ADDRESSES, CHECK THAT
                    ; ADDITIONAL DATA IS INCLUDED
                    ;
5A8E CD 59A3     HLDECK:  CALL     HHLDE     ;2 ADDR
5A91 DA 59E0              JP       C,ERROR   ;THAT'S ALL
5A94 C3 599C              JP       RDHLD2    ;CHECK
                    ;
                    ; MOVE A BLOCK OF MEMORY H,L-D,E TO B,C
                    ;
5A97 CD 5A80     MOVE:    CALL     HLDEBC    ;3 ADDR
5A9A CD 5AA3     MOVDN:   CALL     MOVIN     ;MOVE/CHECK
5A9D CD 5A0C              CALL     TSTOP     ;DONE?
5AA0 03                   INC      BC        ;NO
5AA1 18 F7                JR       MOVDN
                    ;
5AA3 7E          MOVIN:   LD       A,(HL)    ;BYTE
5AA4 02                   LD       (BC),A    ;NEW LOCATION
5AA5 0A                   LD       A,(BC)    ;CHECK
5AA6 BE                   CP       (HL)      ;IS IT THERE?
5AA7 C8                   RET      Z         ;YES
5AA8 60                   LD       H,B       ;ERROR
5AA9 69                   LD       L,C       ;INTO H,L
5AAA C3 5A4A              JP       ERRP      ;SHOW BAD
                    ;
                    ; SEARCH FOR 1 OR 2 BYTES OVER THE
                    ; RANGE H,L D,E. BYTES ARE IN B,C
                    ; B HAS CARRIAGE RETURN IF ONLY ONE BYTE
                    ; PUT SPACE BTWEEN BYTES IF TWO
                    ; FORMAT: START STOP BYTE1 BYTE2
                    ;
5AAD CD 5A80     SEARCH:  CALL     HLDEBC    ;RANGE, 1ST BYTE
5AB0 06 0D       SEAR2:   LD       B,CR      ;SET FOR 1 BYTE
5AB2 38 06                JR       C,SEAR3   ;ONLY ONE
5AB4 E5                   PUSH     HL
5AB5 CD 59AE              CALL     READHL    ;2ND BYTE
5AB8 45                   LD       B,L       ;INTO C
5AB9 E1                   POP      HL
5ABA 7E          SEAR3:   LD       A,(HL)    ;GET BYTE
5ABB B9                   CP       C         ;MATCH?
5ABC 20 10                JR       NZ,SEAR4  ;NO
5ABE 23                   INC      HL        ;YES
5ABF 78                   LD       A,B       ;ONLY 1?
5AC0 FE 0D                CP       CR
5AC2 28 04                JR       Z,SEAR5   ;YES
                    ;
                    ; FOUND FIRST MATCH, CHECK FOR SECOND
                    ;
5AC4 7E                   LD       A,(HL)    ;NEXT BYTE
5AC5 B8                   CP       B         ;MATCH?
5AC6 20 06                JR       NZ,SEAR4  ;NO
                    ;
```

```
5AC8 2B          SEAR5:  DEC     HL      ;A MATCH
5AC9 C5                  PUSH    BC
5ACA CD 59E8             CALL    CRHL    ;SHOW ADDR
5ACD C1                  POP     BC
5ACE CD 5A0C     SEAR4:  CALL    TSTOP   ;DONE?
5AD1 18 E7               JR      SEAR3   ;NO
                 ;
                 ; ASCII SUB-COMMAND PROCESSOR
                 ;
5AD3 CD 5949     ASCII:  CALL    GETCH   ;NEXT CHAR
5AD6 FE 44               CP      'D'     ;DISPLAY
5AD8 28 24               JR      Z,ADUMP
5ADA FE 53               CP      'S'     ;SEARCH
5ADC 28 42               JR      Z,ASCS
5ADE FE 4C               CP      'L'     ;LOAD
5AE0 C2 59E0             JP      NZ,ERROR
                 ;
                 ; LOAD ASCII CHARACTERS INTO MEMORY
                 ; QUIT ON CONTROL-X
                 ;
5AE3 CD 59AE             CALL    READHL  ;ADDRESS
5AE6 CD 59EB             CALL    OUTHL   ;PRINT IT
5AE9 CD 5815     ALOD2:  CALL    INPUTT  ;NEXT CHAR
5AEC CD 5835             CALL    OUTT    ;PRINT IT
5AEF 47                  LD      B,A     ;SAVE
5AF0 CD 5A46             CALL    CHEKM   ;INTO MEMORY
5AF3 23                  INC     HL      ;POINTER
5AF4 7D                  LD      A,L
5AF5 E6 7F               AND     7FH     ;LINE END?
5AF7 20 F0               JR      NZ,ALOD2 ;NO
5AF9 CD 59E8             CALL    CRHL    ;NEW LINE
5AFC 18 EB               JR      ALOD2
                 ;
                 ; DISPLAY MEMORY IN STRAIGHT ASCII.
                 ; KEEP CARRIAGE RETURN, LINE FEED, CHANGE
                 ; TAB TO SPACE, REMOVE OTHER CONTROL CHAR.
                 ;
5AFE CD 5999     ADUMP:  CALL    RDHLDE  ;RANGE
5B01 7E          ADMP2:  LD      A,(HL)  ;GET BYTE
5B02 FE 7F               CP      DEL     ;HIGH BIT ON?
5B04 30 15               JR      NC,ADMP4 ;YES
5B06 FE 20               CP      ' '     ;CONTROL?
5B08 30 0E               JR      NC,ADMP3 ;NO
5B0A FE 0D               CP      CR      ;CARR RET?
5B0C 28 0A               JR      Z,ADMP3 ;YES, OK
5B0E FE 0A               CP      LF      ;LINE FEED?
5B10 28 06               JR      Z,ADMP3 ;YES, OK
5B12 FE 09               CP      TAB
5B14 20 05               JR      NZ,ADMP4 ;SKIP OTHER
5B16 3E 20               LD      A,' '   ;SPACE FOR TAB
5B18 CD 5835     ADMP3:  CALL    OUTT    ;SEND
5B1B CD 5A0C     ADMP4:  CALL    TSTOP   ;DONE?
5B1E 18 E1               JR      ADMP2   ;NO
                 ;
                 ; SEARCH FOR 1 OR 2 ASCII CHARACTERS
                 ; NO SPACE BETWEEN ASCII CHARS
                 ; FORMAT: START STOP 1 OR 2 ASCII CHAR
                 ;
```

```
5B20 CD 5999    ASCS:   CALL    RDHLDE  ;RANGE
5B23 CD 5949            CALL    GETCH   ;FIRST CHAR
5B26 4F                 LD      C,A
5B27 CD 5949            CALL    GETCH   ;2ND OR CARR RET
5B2A DA 5AB0            JP      C,SEAR2 ;ONLY ONE CHAR
5B2D 47                 LD      B,A     ;2ND
5B2E C3 5ABA            JP      SEAR3
                ;
                ; INPUT FROM ANY PORT (Z-80 VERSION)
                ;
5B31 CD 59AE    IPORT:  CALL    READHL  ;PORT
5B34 4D                 LD      C,L     ;PORT TO C
5B35 ED 68              IN      L,(C)   ;INPUT
5B37 CD 59EF            CALL    OUTLL   ;HEX VALUE
                ;
                ; PRINT L REGISTER IN BINARY (Z-80 VER)
                ;
5B3A 06 08      BITS:   LD      B,8     ;8 BITS
5B3C CB 25      BIT2:   SLA     L       ;SHIFT L LEFT
5B3E 3E 18              LD      A,'0'/2 ;HALF OF 0
5B40 8F                 ADC     A,A     ;DOUBLE+CARRY
5B41 CD 5835            CALL    OUTT    ;PRINT BIT
5B44 10 F6              DJNZ    BIT2    ;8 TIMES
5B46 C9                 RET
                ;
                ; OUTPUT BYTE FROM PORT (Z-80 VERSION)
                ; FORMAT IS: O,PORT,BYTE
                ;
5B47 CD 59AE    OPORT:  CALL    READHL  ;PORT
5B4A 4D                 LD      C,L
5B4B CD 59AE            CALL    READHL  ;DATA
5B4E ED 69              OUT     (C),L   ;OUTPUT
5B50 C9                 RET
                ;
                ; HEXADECIMAL MATH, SUM AND DIFFERENCE
                ;
5B51 CD 59A3    HMATH:  CALL    HHLDE   ;TWO NUMBERS
5B54 E5                 PUSH    HL      ;SAVE H,L
5B55 19                 ADD     HL,DE   ;SUM
5B56 CD 59EB            CALL    OUTHL   ;PRINT IT
5B59 E1                 POP     HL
5B5A B7                 OR      A       ;CLEAR CARRY
5B5B ED 52              SBC     HL,DE
5B5D C3 59EB            JP      OUTHL   ;DIFFERENCE
                ;
                ; MEMORY TEST THAT DOESN'T ALTER CURRENT BYTE
                ; INPUT RANGE OF ADDRESSES, ABORT WITH ^X
                ;
5B60 CD 5999    JUST:   CALL    RDHLDE  ;RANGE
5B63 E5                 PUSH    HL      ;SAVE START ADDR
5B64 7E         JUST2:  LD      A,(HL)  ;GET BYTE
5B65 2F                 CPL             ;COMPLEMENT IT
5B66 77                 LD      (HL),A  ;PUT IT BACK
5B67 BE                 CP      (HL)    ;DID IT GO?
5B68 C2 5B7E            JP      NZ,JERR ;NO
5B6B 2F                 CPL             ;ORIGINAL BYTE
5B6C 77                 LD      (HL),A  ;PUT IT BACK
```

```
5B6D 7D          JUST3:  LD      A,L      ;PASS
5B6E 93                  SUB     E        ; COMPLETED?
5B6F 7C                  LD      A,H
5B70 9A                  SBC     A,D
5B71 23                  INC     HL
5B72 38 F0               JR      C,JUST2  ;NO
                 ;
                 ; AFTER EACH PASS,
                 ; SEE IF ABORT WANTED
                 ;
5B74 CD 5827             CALL    INSTAT   ;INPUT?
5B77 C4 5815             CALL    NZ,INPUTT ;YES, GET IT
5B7A E1                  POP     HL       ;START ADDR
5B7B E5                  PUSH    HL       ;SAVE AGAIN
5B7C 18 E6               JR      JUST2    ;NEXT PASS
                 ;
                 ; FOUND MEMORY ERROR, PRINT POINTER AND
                 ; BIT MAP: 0=GOOD, 1=BAD BIT
                 ;
5B7E F5          JERR:   PUSH    AF       ;SAVE COMPLEMENT
5B7F CD 59E8             CALL    CRHL     ;PRINT POINTER
5B82 F1                  POP     AF
5B83 AE                  XOR     (HL)     ;SET BAD BITS
5B84 E5                  PUSH    HL       ;SAVE POINTER
5B85 6F                  LD      L,A      ;BIT MAP TO L
5B86 CD 5B3A             CALL    BITS     ;PRINT BINARY
5B89 E1                  POP     HL
5B8A 18 E1               JR      JUST3    ;CONTINUE
                 ;
                 ; REPLACE HEX BYTE WITH ANOTHER
                 ; FORMAT IS: START, STOP, ORIG, NEW
                 ;
5B8C CD 5A80     REPL:   CALL    HLDEBC   ;RANGE, 1ST BYTE
5B8F DA 59E0             JP      C,ERROR  ;NO 2ND
5B92 41                  LD      B,C      ;1ST TO B
5B93 E5                  PUSH    HL
5B94 CD 59AE             CALL    READHL   ;2ND BYTE
5B97 4D                  LD      C,L      ;INTO C
5B98 E1                  POP     HL
5B99 7E          REPL2:  LD      A,(HL)   ;FETCH BYTE
5B9A B8                  CP      B        ;A MATCH?
5B9B 20 06               JR      NZ,REPL3 ;NO
5B9D 71                  LD      (HL),C   ;SUBSTITUTE
5B9E 79                  LD      A,C
5B9F BE                  CP      (HL)     ;SAME?
5BA0 C2 5A4B             JP      NZ,ERRB  ;NO, BAD
5BA3 CD 5A0C     REPL3:  CALL    TSTOP    ;DONE?
5BA6 18 F1               JR      REPL2
                 ;
                 ; GIVE RANGE OF 1ST BLOCK AND START OF SECOND
                 ;
5BA8 CD 5A80     VERM:   CALL    HLDEBC   ;3 ADDRESSES
5BAB 0A          VERM2:  LD      A,(BC)   ;FETCH BYTE
5BAC BE                  CP      (HL)     ;SAME AS OTHER?
5BAD 28 19               JR      Z,VERM3  ;YES
5BAF E5                  PUSH    HL       ;DIFFERENT
5BB0 C5                  PUSH    BC
```

```
5BB1  CD  59E8              CALL    CRHL      ;PRINT 1ST POINTER
5BB4  4E                    LD      C,(HL)    ;FIRST BYTE
5BB5  CD  59F0              CALL    OUTHEX    ;PRINT IT
5BB8  3E  3A                LD      A,':'
5BBA  CD  5835              CALL    OUTT
5BBD  E1                    POP     HL        ;B,C TO H,L
5BBE  CD  59EB              CALL    OUTHL     ;SECOND POINTER
5BC1  4E                    LD      C,(HL)    ;2ND BYTE
5BC2  CD  59F8              CALL    OUTHX     ;PRINT IT
5BC5  4D                    LD      C,L       ;RESTORE C
5BC6  44                    LD      B,H       ;AND B
5BC7  E1                    POP     HL        ;AND H,L
5BC8  CD  5A0C      VERM3:  CALL    TSTOP     ;DONE?
5BCB  03                    INC     BC        ;2ND POINTER
5BCC  18  DD                JR      VERM2
                    ;
                            END     START
```

Symbols:

ADMP2	5B01	ADMP3	5B18	ADMP4	5B1B	ADUMP	5AFE
ALOD2	5AE9	APOS	FFF7	ASCII	5AD3	ASCS	5B20
BACKUP	0008	BIT2	5B3C	BITS	5B3A	CALLS	5A15
CDATA	0011	CHEKM	5A46	CIN	5809	COLD	587E
COUT	5806	CR	000D	CRHL	59E8	CRLF	5935
CSTAT	0010	CTRH	0008	CTRP	0010	CTRQ	0011
CTRS	0013	CTRX	0018	DEL	007F	DUMP	595E
DUMP2	5961	DUMP3	5964	DUMP4	5975	DUMP5	597E
ERRB	5A4B	ERROR	59E0	ERRP	5A4A	FILL	5A64
FILL2	5A6C	FILL3	5A72	FILL4	5A7A	GCHAR	580F
GETC4	595C	GETCH	5949	GO	5A14	HEX1	5A01
HHLDE	59A3	HLDEBC	5A80	HLDECK	5A8E	HMATH	5B51
IBUFC	57A5	IBUFF	57A6	IBUFP	57A3	INLN	580C
INMSK	0001	INPL2	5902	INPL3	591B	INPLB	593F
INPLC	5929	INPLE	5924	INPLI	590A	INPLN	58FD
INPUT2	581A	INPUTT	5815	INSTAT	5827	IPORT	5B31
JERR	5B7E	JUST	5B60	JUST2	5B64	JUST3	5B6D
LDATA	0013	LF	000A	LOAD	5A19	LOAD2	5A1C
LOAD3	5A3D	LOAD4	5A3A	LOAD6	5A40	LOMSK	0002
LOUT	585B	LSTAT	0012	MOVDN	5A9A	MOVE	5A97
MOVIN	5AA3	MSIZE	58A5	NIB	59D0	NNULS	0004
NPAGE	589A	OMSK	0002	OPORT	5B47	ORGIN	5800
OUT2	583C	OUT3	5848	OUT4	5851	OUTCR	5874
OUTCR2	5876	OUTH	5812	OUTHEX	59F0	OUTHL	59EB
OUTHX	59F8	OUTLL	59EF	OUTSP	59F3	OUTT	5835
PASC2	5994	PASC3	5996	PASCI	598B	PORTN	57A0
RDHL2	59B3	RDHL4	59C5	RDHL5	59CD	RDHLD2	599C
RDHLDE	5999	READHL	59AE	REGS	5A56	REPL	5B8C
REPL2	5B99	REPL3	5BA3	RESTRT	5803	SEAR2	5AB0
SEAR3	5ABA	SEAR4	5ACE	SEAR5	5AC8	SEARCH	5AAD
SETLST	582C	STACK	57A0	START	5800	TAB	0009
TABLE	58C9	TOP	0018	TSTOP	5A0C	VERM	5BA8
VERM2	5BAB	VERM3	5BC8	WARM	5891	ZERO	5A5D

CONVERSION OF THE MONITOR TO Z-80 MNEMONICS

If you used 8080 mnemonics to program the monitor in Chapter 6, you can
now convert it to Z-80 mnemonics. The form of the mnemonics depends on
the type of assembler you have. The Microsoft assembler accepts both the
Intel 8080 and the Zilog Z-80 mnemonics. Since most other assemblers use
only one or the other, you may need a second assembler.

The Digital Research assembler MAC requires the 8080 mnemonics, but
it can generate Z-80 code with an accompanying macro library. The Xitan
assembler utilizes 8080 mnemonics for the common set of 8080-type instruc-
tions and Zilog-like instructions for the others.

First, make a working copy of the monitor using PIP, a CP/M utility
routine.

```
PIP  MONZ.ASM=MON17.ASM[V]
```

If you are using MAC or the Xitan assembler, skip to the next section. Other-
wise, use the system editor to make the necessary changes to the new file.
The conversion can be easily performed with the global substitute command
of the Word-Master or the CP/M editor. For example, the 8080 mnemonic

```
MOV   A,M
```

can be changed to the equivalent Z-80 mnemonic

```
LD   A,(HL)
```

with the command

```
*SMOV<tab>A,M$LD<tab>A,(HL)$0TT
```

The $ symbols indicate that the escape key is pressed. The "tab" refers to
the ASCII tab key, a control-I. You may find the cross-reference list for 8080
and Z-80 mnemonics, given in Appendix G, helpful in the conversion process.

After changing the monitor to Z-80 mnemonics, assemble it and care-
fully check the assembly listing to see that the hex code is correct. The Z-80
version at this time should generate the same hex code as the 8080 version.
A further check can be made with the monitor's V command. Load the
binary code into memory with an offset. A command of

```
DDT
IMONZ.HEX
RF000
```

will load the new version 4K bytes below the regular monitor position.
Branch to the monitor prepared in the last chapter. Then compare its code
to the new version using the verify command. If there is a discrepancy, find
the error and correct it. When you are convinced that the Z-80 version pro-
duces the same code as the 8080 version, you can begin the alterations to
reduce the monitor's size.

REDUCING THE MONITOR SIZE

In this section you will reduce the monitor size by converting many of the 3-byte absolute jump instructions into 2-byte relative jump instructions. This change will make room for additional features. There are five types of jumps to be changed.

```
absolute        relative        condition
 jump            jump
JP   X          JR   X          unconditional
JP   Z,X        JR   Z,X        zero
JP   NZ,X       JR   NZ,X       not zero
JP   C,X        JR   C,X        carry
JP   NC,X       JR   NC,X       not carry
```

Not all of the absolute jumps can be converted in this way since the relative jumps are limited to a distance of about 126 bytes.

Another way to obtain more space is to move some of the subroutines to more advantageous locations. This will allow a few more absolute jumps to be converted into relative jumps. For example, several routines contain a jump to the routine ERROR. These can be placed together in a group. Then the ERROR routine can be moved into the middle of the group.

Another change will free up three more bytes. Notice that subroutine OUTSP ends with the instruction

```
JP   OUTT
```

If this subroutine were located directly ahead of subroutine OUTT, then the jump instruction would not be necessary. Actually, this type of change has already been used extensively in our monitor. Subroutines CRHL, OUTHL, OUTHEX, and OUTSP are all directly related. They initially could have been programmed (using Z-80 mnemonics) as

```
CRHL:   CALL    CRLF
        CALL    OUTHL
        RET
;
OUTHL:  LD      C,H
        CALL    OUTHX
OUTLL:  LD      C,L
        CALL    OUTHEX
        RET
;
OUTHEX: CALL    OUTHX
        CALL    OUTSP
        RET
;
OUTSP:  LD      A,' '
        CALL    OUTT
        RET
```

The CALL/RET combination at the end of each routine can be replaced by a JP instruction. Then, since the calling program is located directly above the called program, the jump instruction becomes unnecessary. Thus, four bytes are saved in each of the first three routines. Furthermore, if this entire block of four subroutines were located just prior to subroutine OUTT, we could eliminate the final JP OUTT instruction and save three more bytes.

While this kind of subroutine rearrangement can be used to make the overall program smaller, there is a penalty. The readability is reduced. We have traded comprehension for space. This may not, in general, be a worthwhile tradeoff for assembly-language programming. Such programs are more difficult to understand than those written in a high-level language such as Pascal or BASIC. Furthermore, assembly-language programs are typically much shorter than they would be if written in a higher-level language. But if packing a maximum number of features into a 1K PROM is your goal, then this technique may be worth it.

GETTING MORE FREE SPACE

The two instructions

```
DEC     B
JP      NZ,X
```

which generate four bytes of code appear in two places. Replace them with the 2-byte instruction

```
DJNZ    X
```

One location is just prior to the label MSIZE (address 58A5 in Listing 7.1) and the other is in subroutine BITS (5B3A). This change will free four more bytes.

The 16-bit subtraction routine in HMATH (5B51) has been improved. The sequence of instructions

```
LD      A,L
SUB     A,E
LD      L,A
LD      A,H
SBC     A,D
LD      H,A
```

is replaced by the shorter, double-precision subtraction:

```
OR      A       ;reset carry
SBC     HL,DE   ;subtract
```

Three more bytes are freed by this change.

Since the Z-80 contains a set of instructions for direct rotation of data in the general CPU registers, we can simplify subroutine BITS. In the 8080 version, the three instructions

```
MOV     A,L
ADD     A
MOV     L,A
```

are used to move the data from a general register to the accumulator, perform the shift, then move it back. The 2-byte, Z-80 arithmetic shift left instruction

```
SLA     L
```

performs the shift directly in the L register.

The 8080 can output a byte only from the accumulator, and can input a byte only to the accumulator. Furthermore, the address of the peripheral must be located in memory immediately following the first byte of the input or output instruction.

The port-input routine IPORT and the port-output routine OPORT in the system monitor utilized subroutine PUTIO. This routine writes the desired IN or OUT instruction in memory, the requested port address and then a return instruction. There is a Z-80 instruction that can perform I/O from any register. The address of the peripheral is located in register C in this case. Since the port address does not have to be located in memory, subroutine PUTIO can be eliminated. The resulting Z-80 code is 19 bytes shorter than the 8080 version. See Listing 7.1 for the new versions of IPORT (5B31) and OPORT (5B47).

Since you are nearly finished with the development of the monitor program, you can gain some more space by removing the routines that print the version number. There are four areas involved. First, delete the line near the beginning that identifies the version number.

```
VERS    EQU     '17'
```

Second, remove four lines starting with the label SIGNON. Third, delete the two lines starting on the line after the label COLD.

```
LD      DE,SIGNON
CALL    SENDM
```

Fourth, remove the entire subroutine SENDM, but keep a copy of it in case you want to incorporate it in another program.

PERIPHERAL PORT INITIALIZATION

There are two schools of thought on peripheral port initialization. One approach is to initialize ports only on a cold start or a warm start. The other

way is to initialize a port each time it is used. The method you use depends on the integrity of your system.

The approach taken in this chapter initializes ports only on a cold start. The instructions are placed just after the label COLD. In anticipation of adding a printer-output routine, we include the initialization for two separate peripherals.

Ports which need initialization utilize a control register for this purpose. The address of the control register is the same as the status register. A CPU IN instruction reads the status register, while a CPU OUT instruction to the same address writes into the control register. A typical initialization procedure requires two OUT instructions. The first is used to reset the port; the second is used to set the desired options. The values shown in the listing correspond to a Motorola 6850 ACIA serial port set for eight data bits, one stop bit, and no interrupts.

```
LD      A,3
OUT     (CSTAT),A       ; RESET
LD      A,15H
OUT     (CSTAT),A       ; SET FEATURES
```

PRINTER OUTPUT ROUTINES

Up to this point, we have been writing programs for output to a console video screen. We output an ASCII backspace character for error correction so that the cursor will actually back up on the screen. We also included a pair of scroll commands: control-S to freeze the display and control-Q to resume the scrolling.

Sometimes, however, we want computer output we can look at after the computer has been shut off. A printer or list device is what we need for this purpose. We will not want to use the printer as a main console, though, because it is too slow.

For sophisticated operating systems like CP/M, the software for the list device is wholly separate. For example, we can divert a disk file to the printer and none of the system commands will appear on the listing.

Our approach will be a little different. The video console will always display all output whether the printer is on or not. Of course, when the printer is engaged, the console speed will be reduced to that of the printer. We will both enable and disable the printer with a control-P command, just as in CP/M. We refer to the control-P command as a list toggle: the same command turns it on or off. The output includes the echoing of the commands typed in from the console keyboard.

Both the input and output routines will have to be changed if you want to incorporate the printer routines. In addition, two new subroutines will be added. First, add two new lines to the input routine; they will look for a control-P from the console keyboard. If a control-P is found, the program

will branch to a new subroutine called SETLST. The two new lines appear in subroutine INPUTT (5815).

```
CP      CTRP    ; ↑P
JR      Z,SETLST ;LIST
```

Subroutine SETLST (582C), containing 4 lines of code, is added just after subroutine INSTAT.

```
SETLST: LD      A,(PORTN) ;CHECK FLAG
        CPL               ;INVERT
        LD      (PORTN),A ;SAVE
        JR      INPUTT    ;NEXT BYTE
```

This routine complements the printer flag (PORTN) when a control-P is typed. The output routine uses this flag to determine whether to send output to the printer. Notice that in Chapter 6, the identifier PORTN was used to set up the port number for the I and O commands. This feature is not needed for the Z-80 version, so we can use the location for the printer flag instead.

The third new section is placed in the output routine OUTT (5835).

```
LD      A,(PORTN) ;WHERE?
OR      A         ;ZERO?
JR      NZ,LOUT   ;LIST OUTPUT
```

This part checks the flag PORTN to see if output is to be sent to the printer.

The fourth routine is LOUT (585B); it follows OUT4. This routine sends output to both the console and the printer. It first checks the status port for the printer. When the output bit indicates ready, a byte is sent to the printer. Since the console video screen operates so much faster than the printer, there is no need to check the console-ready flag. The byte is therefore also sent directly to the console by the next instruction. The output appears simultaneously at both devices.

DELAY AFTER A CARRIAGE RETURN

Video screens operate with electron beams that move very fast. Mechanical printers, on the other hand, are much slower. For some printers, the time it takes to execute a carriage return is so great that the first few characters of the next line may be lost. The solution is to have the computer do something else for a little while after it sends a carriage return.

One method of slowing down the computer is to arrange for it to send binary zeros, called nulls, after each carriage return or carriage-return/line-feed pair. One routine for accomplishing this is as follows.

```
CRLF:   LD      A,CR    ;CARRIAGE RET
        CALL    OUTT    ;SEND
        LD      A,LF    ;LINE FEED
        CALL    OUTT    ;SEND
        XOR     A       ;GET A NULL
        CALL    OUTT    ;SEND IT
        CALL    OUTT    ;A SECOND ONE
        CALL    OUTT    ;A THIRD
        JP      OUTT    ;THE FOURTH
```

But this approach may cause trouble if the printer circuits attempt to interpret the null characters.

A different approach is taken with the list-output routine, LOUT, shown in Listing 7.1. After each carriage return is sent, the computer starts executing a double loop. The inner loop is executed 250 times. The outer loop is set according to the equivalent number of nulls that are needed. No nulls are actually sent, though, in this case.

The disadvantage of this method is that the resultant delay time is a function of the computer speed. A Z-80 running at 4 MHz would require approximately twice the number of loops as would a 2-MHz Z-80. Thus, the loop-initialization values may have to be adjusted to the particular computer.

Be careful to tailor the port-initialization routines to your system or remove them if they are not needed. The time delay in the list-output routine should also be removed if it is not needed. If you are not sure whether a delay is necessary, then leave it in, at least for the first version. Then use the memory load command of the monitor itself to reduce the delay values on the two loops. When you reduce the delay time to too small a value, then you will notice that some of the characters are missing from the beginning of some of the lines.

A sample loop-change session could look like this.

```
>D5870 587F
5870 C0D51678 1EFA1D20 1520....
>L5873
5873 x 78 3C
5873 . 1E ^X (to quit)
```

The first command line is used to display the memory region containing the loop constants. Then the outer loop value of 78 hex is changed to 3C hex which is half the value. As long as you change the timing-loop values with the printer disengaged, no problem should occur. After each change in the timing loops, re-engage the printer with a control-P. Display several lines on the printer by giving the D command. Check to see if any of the first few characters of each line are missing. If everything is all right, then again reduce the loop constant until characters are lost. (Be sure to disengage the printer between each change.)

CHAPTER EIGHT

Number-Base Conversion

This chapter deals with assembly language routines that can be used to convert data from one form to another. The first part deals with the conversion of a sequence of ASCII characters called a *string* into a binary number. The second part reverses the procedure; binary numbers are converted into ASCII strings. The characters in each string represent digits in one of the common bases 2, 8, 10, or 16. The corresponding binary number may be 4 bits, 8 bits, or 16 bits in size.

All of the programs in this chapter are designed to run with the system monitor developed in Chapters 6 and 7. Some of the monitor's input and output facilities are needed. These include the console input buffer which supplies the characters, the binary-to-hexadecimal conversion routine which will print the answer in hexadecimal, and the console output routine needed for the error message.

The monitor error-correction features are available during input. Pressing the DEL (or RUB) key or the backspace (control-H) key will delete the previously typed character and remove it from the console video screen. If the list routines have been incorporated into the monitor, the printer can be turned on by typing a control-P. When you have finished with each routine, you can return to the monitor simply by typing a control-X.

THE ASCII CODE

When a key is pressed on a computer terminal, a unique signal is sent to the computer. There are several, very different ways of electronically encoding this signal. ASCII, which stands for American Standard Code for Information Interchange, is the most commonly used code. Appendix A gives the 128 ASCII characters with the corresponding values expressed in decimal, hexadecimal, octal, and binary. EBCDIC, which is used by IBM, is another coding technique.

The ASCII table can be divided into four parts. Part 1 of the table contains the nonprinting control characters. Part 2 contains most of the special characters such as $, %, and #, and the digits 0–9. The uppercase letters are found in part 3, and the lowercase letters are found in part 4.

Computer terminals typically have a keyboard that looks like a typewriter. There is a shift key to change from lowercase letters to uppercase letters. In addition to the shift key, there will usually be a control key. This key will give the letter keys a third meaning. Thus the user can enter a lowercase letter A, an uppercase letter A (a shift A), or a control-A. The bit patterns are:

```
110 0001  lowercase A
100 0001  uppercase A
000 0001  control-A
```

It can be seen from the pattern that the shift key resets bit 5 while the control key resets both bits 5 and 6.

Some of the commonly used control functions such as the carriage return (control-M), line feed (control-J), the horizontal tab (control-I), and the backspace (control-H) may have their own separate keys.

All console input to the computer will be in the form of ASCII characters. The console will send eight data bits for each character. But the ASCII code contains only seven bits per character. Consequently, the eighth, high-order bit is not needed. The user will need to have routines for converting strings of ASCII characters into the ultimate numbers that will reside in memory. For example, if the operator enters the string

3014

from the console, the computer would actually receive the bit patterns

```
011 0111  (ASCII 3)
011 0000  (ASCII 0)
011 0001  (ASCII 1)
011 0100  (ASCII 4)
```

The next step is to convert the string into a 16-bit number. The conversion scheme that is chosen depends on whether the string represents a decimal number, an octal number, or a hexadecimal number.

Additionally, a check is made to ensure that each character in the string is within the proper range. For example, octal numbers must contain only the digits zero through 7. The digits 8 and 9, the letters A through Z, and the other characters are not used. Finally, we may need a special character, called a *delimiter*, to indicate the end of a string. We will use a space or a carriage return for this purpose. Thus the string of characters

1034 2347

will be interpreted as two separate numbers since a space appears in the middle.

The ASCII string may need to be converted into a 4-bit nibble, an 8-bit byte destined for a CPU register, or a 16-bit word meant for a double register. Furthermore, the format may be either *free entry* or *fixed entry*. The choice is a matter of personal taste. With free entry, leading zeros are not needed. The entries

```
0004
004
04
4
```

are all interpreted as the same number. An additional feature is that you can recover from an error by retyping the entry on the same line. Suppose that the 4-digit number 1035 is desired but 1045 was typed by mistake. The correct value can be immediately typed without a space.

```
10351045
```

If two 4-digit numbers are needed, they must be separated by a delimiter.

```
1045 1055
```

With the fixed-entry format, the required number of digits, including leading zeros, must be entered. But since an end-of-string indicator is not needed, two numbers can be run together. The fixed-entry expression

```
10451055
```

will be interpreted as two separate numbers.

CONVERSION OF ASCII-ENCODED BINARY CHARACTERS TO AN 8-BIT BINARY NUMBER IN REGISTER C

One of the simplest base-conversion routines is the ASCII-to-binary program. This program takes a string of ASCII-encoded ones and zeros from the console input buffer and produces an 8-bit binary number in register C. The hexadecimal equivalent of the number is printed on the console. If the operator types the string

```
10101100
```

the keyboard actually transmits the following sequence.

```
011  0001
011  0000
011  0001
011  0000
011  0001
011  0001
011  0000
011  0000
```

The conversion routine will take this combination, convert it to the binary number

10101100

and place it into the C register.

Type the routine shown in Listing 8.1 Set the assembly location somewhere below the monitor's stack and include the address of the monitor using the EQU directive. The monitor I/O routines are defined relative to the monitor's address.

```
Listing 8.1. ASCII-encoded binary to binary in C.

                        ; THIS PROGRAM IS DESIGNED TO OPERATE
                        ; WITH THE SYSTEM MONITOR AT 5800 HEX.
                        ;
                        ; JAN 29, 80
                        ;
5000                    ORG     5000H
                        ;
5800 =                  MONIT   EQU     5800H
5806 =                  OUTT    EQU     MONIT+6
580C =                  INPLN   EQU     MONIT+0CH
580F =                  GETCH   EQU     MONIT+0FH
5812 =                  OUTHX   EQU     MONIT+12H
                        ;
5000 3E0D               START:  MVI     A,0DH    ;CARR RET
5002 CD0658                     CALL    OUTT
5005 3E0A                       MVI     A,0AH    ;LINE FEED
5007 CD0658                     CALL    OUTT
500A CD0C58                     CALL    INPLN    ;GET A LINE
500D CD1B50                     CALL    BBIN     ;CONVERT
5010 CD1258                     CALL    OUTHX    ;HEX VALUE
5013 3E20                       MVI     A,' '
5015 CD0658                     CALL    OUTT
                        ;
                        ; THE NEXT INSTRUCTION IS NEEDED WHEN
                        ; THE ROUTINE IN LISTING 8.9 IS APPENDED
                        ;       CALL    BITS     ;BIN TO ASCII
5018 C30050                     JMP     START    ;NEXT VALUE
                        ;
                        ; SUBROUTINE TO CONVERT UP TO 8 ASCII-
                        ; ENCODED BINARY CHARACTERS INTO AN
                        ; 8-BIT BINARY NUMBER IN C
                        ;
```

```
501B E5        BBIN:   PUSH    H           ;SAVE REGS
501C 210000            LXI     H,0         ;CLEAR
501F CD0F58    BBIN2:  CALL    GETCH       ;GET CHAR
5022 DA3A50            JC      BBIN3       ;LINE END
5025 D630              SUI     '0'         ;CONV TO BINARY
5027 DA3550            JC      BBIN4       ; < 0
502A FE02              CPI     2
502C D23D50            JNC     ERROR       ; > 1
502F 29                DAD     H           ;SHIFT LEFT
5030 B5                ORA     L           ;ADD NEW CHAR
5031 6F                MOV     L,A
5032 C31F50            JMP     BBIN2       ;NEXT
               ;
               ; CHECK FOR BLANK AT END
               ;
5035 FEF0      BBIN4:  CPI     (' '-'0') AND 0FFH
5037 C23D50            JNZ     ERROR       ;NOT BLANK
503A 4D        BBIN3:  MOV     C,L         ;8 BITS TO C
503B E1                POP     H           ;RESTORE
503C C9                RET
               ;
               ; PRINT ? ON IMPROPER INPUT
               ;
503D C1        ERROR:  POP     B           ;RAISE STACK
503E C1                POP     B
503F 3E3F              MVI     A,'?'
5041 CD0658            CALL    OUTT
5044 C30050            JMP     START       ;TRY AGAIN
```

Assemble the program and load it into memory; start it up by branching to the beginning of the program, the address of START. The monitor prompt symbol of > will appear on the console. Test the routine by entering the following binary numbers. Be sure to add a carriage return to the end of each line.

```
>0         (you type this)
00         (program responds with this)
>1
01
>10
02         (binary 10 is hexadecimal 2)
>11
03
>101
05         (binary 101 is hexadecimal 5)
>1111
0F
>11110000
F0
>10101010
AA
```

Of course, only ASCII zeros and ones are acceptable binary characters. Leading zeros are not necessary. If more than eight characters are entered, only the last eight are used. A question mark will be printed if a nonbinary

character is typed. Typing errors can be corrected with a backspace or DEL keys.

The program consists of three parts. The first and third parts will be common to other conversion programs in this chapter. The first part calls the monitor to obtain data from the console. The last part converts the data to the hexadecimal equivalent and prints it on the console if valid. If the entry is invalid, a question mark is printed.

The conversion routine occupies the middle portion of the program. It works as follows: Since HL is used as a working register, the original contents are first saved on the stack. While this step is not necessary in this case, it may be needed in a real application. The HL register is then zeroed.

As each new character is obtained from the input buffer, it is converted from ASCII to binary by subtracting 30 hex, the value of the ASCII zero. An ASCII zero, which has a value 30 hex, becomes a binary zero. Similarly, an ASCII 1, which has a value of 31 hex, becomes a binary 1.

```
011 0000    ASCII zero
011 0000    subtract ASCII zero
---------
000 0000    binary zero

011 0001    ASCII 1
011 0000    subtract ASCII zero
---------
000 0001    binary 1
```

A check is made at this point to ensure that an invalid character has not been typed. Only three characters are acceptable: An ASCII zero, an ASCII 1, and a space. If the carry flag is set after the subtraction of an ASCII zero, then the input value was neither a zero nor a 1. But it might be a space character. A jump is made to subroutine BBIN4 in this case. This routine determines whether the current character is a space or some other character. A space is the normal end-of-string character (delimiter); other characters are not.

Each character is also checked to see that it is not greater than an ASCII 1. In either case, if any character in the string is found to be other than an ASCII zero or 1, then the subroutine is terminated with a jump to the error routine. At this point, the stack is raised with a POP instruction, and control returns to START at the top of the program.

If the input value is a zero or 1, the procedure continues. The current value in the HL register is multiplied by two, the binary number base. This arithmetic shift left is accomplished by adding the HL register to itself with the double-precision add DAD H. An alternate method would be to place the sum in the accumulator. In this case the multiplication is performed with an ADD A instruction. But then the intermediate sum would have to be saved in another register while the new character was checked.

The new character, which is now a binary zero or 1 in the accumulator, is added to the value in HL. The addition of the 8-bit accumulator to the 16-bit HL register generally requires several steps.

1. Add L to A.
2. Move sum in A to L.
3. Increment H if carry is set.

But in this particular case, the carry flag will never be set. Consequently, a simpler method of addition can be used. The one chosen for this application is to perform a logical OR operation with the L register and the accumulator.

CONVERSION OF ASCII DECIMAL CHARACTERS TO A BINARY NUMBER

We frequently find it useful to input computer data in the form of decimal numbers. We may then need a program to convert ASCII-encoded decimal numbers into binary form. The program given in Listing 8.2 will perform this task for us.

```
     Listing 8.2. ASCII decimal to binary in HL.

                         ; THIS PROGRAM IS DESIGNED TO OPERATE
                         ; WITH THE SYSTEM MONITOR AT 5800 HEX
                         ;
                         ; JAN 22, 80
                         ;
     5000                ORG    5000H
                         ;
     5800 =              MONIT  EQU    5800H
     5806 =              OUTT   EQU    MONIT+6
     580C =              INPLN  EQU    MONIT+0CH
     580F =              GETCH  EQU    MONIT+0FH
     5812 =              OUTHX  EQU    MONIT+12H
                         ;
     5000 3E0D           START: MVI    A,0DH     ;CARR RET
     5002 CD0658                CALL   OUTT
     5005 3E0A                  MVI    A,0AH     ;LINE FEED
     5007 CD0658                CALL   OUTT
     500A CD0C58                CALL   INPLN     ;GET A LINE
     500D CD2050                CALL   DBIN      ;ASCII TO DEC
     5010 4C                    MOV    C,H       ;HIGH HALF
     5011 CD1258                CALL   OUTHX
     5014 4D                    MOV    C,L
     5015 CD1258                CALL   OUTHX     ;LOW HALF
     5018 3E20                  MVI    A,' '     ;SPACE
     501A CD0658                CALL   OUTT
                         ;
                         ; THE NEXT INSTRUCTION IS NEEDED WHEN
                         ; THE ROUTINE IN LISTING 8.11 IS USED
                         ;        CALL   BIND      ;BIN/DECIMAL
     501D C30050                JMP    START     ;NEXT VALUE
                         ;
                         ; ASCII DECIMAL TO 16-BIT IN H,L
                         ;
     5020 D5             DBIN:  PUSH   D         ;SAVE REGS
     5021 210000                LXI    H,0       ;CLEAR
```

```
5024 CD0F58    DBIN2:   CALL    GETCH     ;GET CHAR
5027 DA4650             JC      DBIN3     ;LINE END
502A D630              SUI     '0'       ;CONV TO BINARY
502C DA4150            JC      DBIN4     ; < 0
502F FE0A             CPI     10
5031 D24850           JNC     ERROR     ; > 10
5034 54               MOV     D,H       ;COPY H,L
5035 5D               MOV     E,L       ; INTO D,E
5036 29               DAD     H         ;TIMES 2
5037 29               DAD     H         ;TIMES 4
5038 19               DAD     D         ;TIMES 5
5039 29               DAD     H         ;TIMES 10
503A 5F               MOV     E,A       ;NEW BYTE
503B 1600             MVI     D,0
503D 19               DAD     D         ;ADD NEW BYTE
503E C32450           JMP     DBIN2     ;NEXT
             ;
             ; CHECK FOR BLANK AT END
             ;
5041 FEF0    DBIN4:   CPI     (' '-'0') AND 0FFH
5043 C24850           JNZ     ERROR     ;NOT BLANK
5046 D1      DBIN3:   POP     D         ;RESTORE
5047 C9               RET
             ;
             ; PRINT ? ON IMPROPER INPUT
             ;
5048 E1      ERROR:   POP     H         ;RESTORE
5049 E1               POP     H         ;STACK
504A 3E3F             MVI     A,'?'
504C CD0658           CALL    OUTT
504F C30050           JMP     START     ;TRY AGAIN
```

This new program uses our monitor for some of the necessary subroutines, just like the ASCII binary-to-binary program given in the previous section. Assemble the program, load it into memory, and branch to START. Again, the monitor prompt symbol > will appear. Try this routine by entering the following decimal numbers. Remember to type a carriage return at the end of each line.

```
>0        (you type this)
0000      (computer response)
>1
0001
>10       (decimal 10)
0A        (gives 0A hex)
>16
000F
>64
0100
>1024
0400
>65545
FFFF
>65547
0002
```

If the input consists of valid decimal characters, then the response will be the corresponding hexadecimal value. If an invalid character is typed, a question mark is printed as an error message and the program is restarted.

Since this routine generates a 16-bit binary number, the largest possible value is one less than 2 to the power 16. This is equivalent to a decimal number of 65,545. If a larger number than this is entered, the excess over 65,545 is lost. Thus, an input of 65547 will give a value of 0002. Remember that the monitor error-correction features and the control-P list toggle are available.

The algorithm is similar to the one in the previous section. The HL register pair is initially zeroed. The incoming character is converted from ASCII to binary, then checked to see that it is in the range 0–9. The current value is multiplied by 10 (the number base) prior to adding in the new character. The multiplication is accomplished with the double-register add instructions as follows.

```
MOV    D,H (duplicate H in D)
MOV    E,L (duplicate E in L)
DAD    H   (double initial value)
DAD    H   (quadruple it)
DAD    D   (5 times initial value)
DAD    H   (double, making 10 times
            the initial value)
```

The total is first duplicated in the DE register. Two double-precision DAD H operations multiply the original value by 4. Adding in the original value with the DAD D makes it 5. A final DAD H produces the desired multiplication by 10.

If only an 8-bit binary number is needed, then the multiplication can be performed in the accumulator rather than in the HL register. This will free the HL register for some other use, such as a memory pointer. The 8-bit version is given in Listing 8.3

```
        Listing 8.3. ASCII decimal to binary in C

                        ; THIS PROGRAM IS DESIGNED TO OPERATE
                        ; WITH THE SYSTEM MONITOR AT 5800 HEX
                        ;
                        ; JAN 12, 80
                        ;
        5000            ORG      5000H
                        ;
        5800 =          MONIT    EQU      5800H
        5806 =          OUTT     EQU      MONIT+6
        580C =          INPLN    EQU      MONIT+0CH
        580F =          GETCH    EQU      MONIT+0FH
        5812 =          OUTHX    EQU      MONIT+12H
                        ;
        5000 3E0D       START:   MVI      A,0DH       ;CARR RET
        5002 CD0658              CALL     OUTT
        5005 3E0A               MVI      A,0AH       ;LINE FEED
        5007 CD0658              CALL     OUTT
```

```
     500A CD0C58              CALL    INPLN    ;GET A LINE
     500D CD1650              CALL    DBIN     ;DEC TO BIN
     5010 CD1258              CALL    OUTHX    ;HEX
    .5013 C30050              JMP     START
                         ;
                         ; CONVERT ASCII-DECIMAL TO 8-BIT BINARY
                         ;
     5016 0E00     DBIN:   MVI     C,0      ;CLEAR C
     5018 CD0F58   DBIN2:  CALL    GETCH    ;GET CHAR
     501B D8               RC               ;LINE END
     501C D630             SUI     '0'      ;CONV TO BINARY
     501E DA3250           JC      DBIN4    ; < 0
     5021 FE0A             CPI     10
     5023 D23850           JNC     ERROR    ; > 10
     5026 57               MOV     D,A      ;SAVE NEW
     5027 79               MOV     A,C      ;SUM
     5028 87               ADD     A        ;TIMES 2
     5029 4F               MOV     C,A      ;SAVE
     502A 87               ADD     A        ;TIMES 4
     502B 87               ADD     A        ;TIMES 8
     502C 81               ADD     C        ;TIMES 10
     502D 82               ADD     D        ;COMBINE
     502E 4F               MOV     C,A      ;SAVE IN C
     502F C31850           JMP     DBIN2    ;NEXT
                         ;
                         ; CHECK FOR BLANK AT END
                         ;
     5032 FEF0     DBIN4:  CPI     (' '-'0') AND 0FFH
     5034 C23850           JNZ     ERROR    ;NOT BLANK
     5037 C9               RET
                         ; PRINT ? ON IMPROPER INPUT
                         ;
     5038 F1       ERROR:  POP     PSW      ;RESTORE
     5039 3E3F             MVI     A,'?'
     503B CD0658           CALL    OUTT
     503E C30050           JMP     START    ;TRY AGAIN
                         ;
     5041                  END
```

CONVERSION OF ASCII HEXADECIMAL CHARACTERS
TO A 16-BIT BINARY NUMBER IN HL

The development of a routine to convert a string of ASCII-encoded hexadecimal characters into a 16-bit binary number will now be considered. This is the routine most frequently used in a system monitor. In fact, this was one of the first routines to be incorporated into our system monitor. Somewhere along the way there will have to be a multiplication by 16, since this is the base of the hexadecimal number. The multiplication can be easily performed by shifting the results left by four bits. Shifting left one bit is equivalent to multiplying by 2. Consequently, shifting by two bits performs a multiplication by 4.

For the binary routine we considered first, only the characters 1 and zero were valid. In the decimal routine that followed, the range of valid

input was zero to 9. The hexadecimal routine we will now consider is complicated by the fact that both the digits 0–9 and the letters A–F are valid.

Two separate algorithms will be considered; one produces an 8-bit result, the other gives a 16-bit result. The program given in Listing 8.4 is similar to the previous ones. It will convert a string of ASCII-encoded hex characters into a 16-bit binary number in the H,L register pair. The double-precision add, DAD H, is used four times to perform the multiplication by 16.

```
Listing 8.4. ASCII hex to binary in HL.

                         ; THIS PROGRAM IS DESIGNED TO OPERATE
                         ; WITH THE SYSTEM MONITOR AT 5800 HEX
                         ;
                         ; JAN 18, 80
                         ;
     5000                ORG      5000H
                         ;
     5800 =              MONIT    EQU      5800H
     5806 =              OUTT     EQU      MONIT+6
     580C =              INPLN    EQU      MONIT+0CH
     580F =              GETCH    EQU      MONIT+0FH
     5812 =              OUTHX    EQU      MONIT+12H
                         ;
     5000 3E0D           START:   MVI      A,0DH     ;CARR RET
     5002 CD0658                  CALL     OUTT
     5005 3E0A                    MVI      A,0AH     ;LINE FEED
     5007 CD0658                  CALL     OUTT
     500A CD0C58                  CALL     INPLN     ;GET A LINE
     500D CD2150                  CALL     READHL    ;CONVERT
     5010 4C                      MOV      C,H
     5011 CD1258                  CALL     OUTHX     ;HIGH HALF
     5014 4D                      MOV      C,L
     5015 CD1258                  CALL     OUTHX     ;LOW HALF
     5018 3E20                    MVI      A,' '     ;SPACE
     501A CD0658                  CALL     OUTT
     501D 7C                      MOV      A,H       ;HIGH BYTE
                         ;
                         ; THE NEXT INSTRUCTION IS NEEDED
                         ; WHEN LISTING 8.10 IS APPENDED
                         ;        CALL     DEC8      ;H IN DECIMAL
     501E C30050                  JMP      START     ;NEXT VALUE
                         ;
                         ; READ UP TO 4 ASCII HEX DIGITS FROM
                         ; CONSOLE AND CONVERT TO 16-BIT
                         ; BINARY NUMBER IN H,L
                         ;
     5021 210000         READHL:  LXI      H,0       ;CLEAR
     5024 CD0F58         RDHL2:   CALL     GETCH     ;GET CHAR
     5027 D8                      RC                 ;LINE END
     5028 CD3E50                  CALL     NIB       ;TO BINARY
     502B DA3750                  JC       RDHL4     ;NOT HEX
     502E 29                      DAD      H         ;TIMES 2
     502F 29                      DAD      H         ;TIMES 4
     5030 29                      DAD      H         ;TIMES 8
     5031 29                      DAD      H         ;TIMES 16
```

```
5032 B5                      ORA     L        ;NEW CHAR
5033 6F                      MOV     L,A
5034 C32450                  JMP     RDHL2    ;NEXT
                     ; CHECK FOR BLANK AT END
                     ;
5037 FEF0            RDHL4:  CPI     (' '-'0') AND 0FFH
5039 C0                      RNZ
503A E1                      POP     H        ;RAISE STACK
503B C34C50                  JMP     ERROR
                     ;
                     ; CONVERT ASCII CHARACTERS TO BINARY
                     ;
503E D630            NIB:    SUI     '0'      ;ASCII BIAS
5040 D8                      RC               ; < 0
5041 FE17                    CPI     'F'-'0'+1
5043 3F                      CMC              ;INVERT
5044 D8                      RC               ;ERROR, > F
5045 FE0A                    CPI     10
5047 3F                      CMC              ;INVERT
5048 D0                      RNC              ;NUMBER 0-9
5049 D607                    SUI     'A'-'9'-1
504B C9                      RET              ;LETTER A-F
                     ;
                     ; PRINT ? ON IMPROPER INPUT
                     ;
504C 3E3F            ERROR:  MVI     A,'?'
504E CD0658                  CALL    OUTT
5051 C30050                  JMP     START    ;TRY AGAIN
```

Each ASCII character is converted to binary in subroutine NIB. This routine subtracts an ASCII zero, then checks to see that the character is valid. If it was originally in the range of an ASCII zero to ASCII 9, it will now be converted to the binary number 0–9. If a hex character A–F was entered, it will be converted to binary form by the additional subtraction of 7. Of course, nonhex characters will produce the error message of a question mark.

Assemble the program, load it into memory, and start it up. Type the following series of hex numbers.

```
>1
0001
>10
0010
>A
000A
>FFFF
FFFF
>12345
2345      (only last 4 characters used)
```

As with the other programs, leading zeros are not needed. If more than four characters are input, only the last four are used. Return to the monitor with a control-X.

CONVERSION OF TWO ASCII HEXADECIMAL CHARACTERS
TO AN 8-BIT BINARY NUMBER IN REGISTER C

In the previous section, HL was used to convert hex characters into a binary number. But, if the HL register pair is needed as a memory pointer, then the accumulator can be used for this conversion. In this case, however, only an 8-bit binary number is produced. Listing 8.5 gives this version. Since the routine uses a fixed format, exactly two characters must be typed. This means that leading zeros must be entered.

```
Listing 8.5. ASCII hex to 8-bit binary C.

                    ; THIS PROGRAM IS DESIGNED TO OPERATE
                    ; WITH THE SYSTEM MONITOR AT 5800 HEX
                    ;
                    ; JAN 22, 80
                    ;
5000                ORG     5000H
                    ;
5800 =              MONIT   EQU     5800H
5806 =              OUTT    EQU     MONIT+6
580C =              INPLN   EQU     MONIT+0CH
580F =              GETCH   EQU     MONIT+0FH
                    ;
                    ; REMOVE NEXT LINE WHEN LISTING 8.12 ADDED
                    ;OUTHX  EQU     MONIT+12H
                    ;
5000 3E0D           START:  MVI     A,0DH    ;CARR RET
5002 CD0658                 CALL    OUTT
5005 3E0A                   MVI     A,0AH    ;LINE FEED
5007 CD0658                 CALL    OUTT
500A CD0C58                 CALL    INPLN    ;GET A LINE
500D CD1650                 CALL    RDHEX    ;ASCII TO HEX
5010 CD4350                 CALL    OUTHX    ;BIN TO HEX
5013 C30050                 JMP     START
                    ;
                    ; CONVERT 2 ASCII-HEX CHARACTERS TO
                    ; AN 8-BIT BINARY NUMBER IN C
                    ;
5016 CD2450         RDHEX:  CALL    HEX2     ;LEFT CHAR
5019 87                     ADD     A        ;TIMES 2
501A 87                     ADD     A        ;TIMES 4
501B 87                     ADD     A        ;TIMES 8
501C 87                     ADD     A        ;TIMES 16
501D 4F                     MOV     C,A      ;SAVE
501E CD2450                 CALL    HEX2     ;RIGHT CHAR
5021 B1                     ORA     C        ;COMBINE
5022 4F                     MOV     C,A
5023 C9                     RET
                    ;
5024 CD0F58         HEX2:   CALL    GETCH    ;HEX CHAR
                    ;
                    ; CONVERT ASCII CHARACTERS TO BINARY
                    ;
```

```
5027 D630                SUI    '0'      ;ASCII BIAS
5029 DA3950              JC     ERROR    ; < 0
502C FE17                CPI    'F'-'0'+1
502E D23950              JNC    ERROR    ;ERROR, > F
5031 FE0A                CPI    10
5033 D8                  RC              ;NUMBER 0-9
5034 D607                SUI    'A'-'9'-1
5036 FE0A                CPI    10
5038 D0                  RNC             ;LETTER A-F
               ;
               ; PRINT ? ON IMPROPER INPUT
               ;
5039 F1        ERROR:    POP    PSW      ;RAISE STACK
503A F1                  POP    PSW
503B 3E3F                MVI    A,'?'
503D CD0658              CALL   OUTT
5040 C30050              JMP    START    ;TRY AGAIN
```

The multiplication by 16 is performed in the accumulator by using four ADD A instructions. The ADD A instruction is equivalent to an arithmetic shift left. Data is moved from the lower four bits to the upper four, and fills the lower bits with zero.

Assemble the program shown in the listing, load it into memory, and try it out. Remember, for this version, exactly two hex characters must be entered.

```
>01
01
>10
10
>0A
0A
>12
12
```

If everything is all right, return to the monitor with a control-X.

CONVERSION OF ASCII OCTAL CHARACTERS
TO A 16-BIT BINARY NUMBER IN REGISTER HL

We did not use octal operations in the system monitor developed in Chapter 6, yet they can be very useful in trying to understand 8080 assembly language instructions. From the 8080 instruction set in Appendix D, it can be seen that the registers are assigned values as shown in the following table.

register	value
0	B
1	C
2	D
3	E
4	H
5	L
6	memory
7	A

Thus the register-move operations are obvious from the octal representation, but not from the hex or decimal form.

```
octal    hex    decimal    operation
 101      41        65     MOV  B,C
 123      53        83     MOV  D,E
 167      77       119     MOV  M,A
```

While octal numbers appear to be better than hexadecimal for expressing the 8080 operation codes, they leave something to be desired as memory pointers. The problem is that 16-bit addresses must be considered as two 8-bit bytes. But octal numbers represent groupings of three bits, and 8 is not evenly divisible by 3. An address of FFFF hex is equivalent to 177777 octal. But if this address is stored in two consecutive bytes, each byte will contain FF hex or 377 octal. This peculiarity of octal has given rise to the expression "crazy octal." A value of FFFF hex is 377:377 crazy octal.

```
hex      octal    crazy octal
  FF       377     000:377
 FFF      7777     017:377
7FFF     77777     177:377
FFFF    177777     377:377
```

Assemble the program, load it into memory, and try it out. The octal numbers input to this routine can be in the range of 0 to 177777. Try various octal numbers.

```
>0
0000
>10
0008
>20
0010
>177
007F
>377
00FF
>400
0100
>123456
A72E
>200000   (too big)
0000
```

Listing 8.6   ASCII octal to binary in HL.

```
                    ; THIS PROGRAM IS DESIGNED TO OPERATE
                    ; WITH THE SYSTEM MONITOR AT 5800 HEX
                    ;
                    ; JAN 22,79
                    ;
5000                ORG     5000H
                    ;
5800 =              MONIT   EQU     5800H
5806 =              OUTT    EQU     MONIT+6
580C =              INPLN   EQU     MONIT+0CH
580F =              GETCH   EQU     MONIT+0FH
5812 =              OUTHX   EQU     MONIT+12H
                    ;
5000 3E0D           START:  MVI     A,0DH    ;CARR RET
5002 CD0658                 CALL    OUTT
5005 3E0A                   MVI     A,0AH    ;LINE FEED
5007 CD0658                 CALL    OUTT
500A CD0C58                 CALL    INPLN    ;GET A LINE
500D CD2050                 CALL    RDOCT    ;OCT TO BIN
5010 4C                     MOV     C,H      ;HIGH HALF
5011 CD1258                 CALL    OUTHX    ;BIN-HEX
5014 4D                     MOV     C,L      ;LOW HALF
5015 CD1258                 CALL    OUTHX    ;BIN-HEX
5018 3E20                   MVI     A,' '    ;SPACE
501A CD0658                 CALL    OUTT
                    ;
                    ; THE NEXT INSTRUCTION IS NEEDED WHEN
                    ; THE ROUTINE IN LISTING 8.13 IS USED
                    ;        CALL    OUTOCT   ;BIN-OCT
501D C30050                 JMP     START    ;NEXT VALUE
                    ;
                    ; INPUT H,L FROM CONSOLE
                    ;
5020 D5             RDOCT:  PUSH    D        ;SAVE REGS
5021 210000                 LXI     H,0      ;CLEAR
5024 CD0F58         OBIN2:  CALL    GETCH    ;GET CHAR
5027 DA4350                 JC      OBIN3    ;LINE END
502A D630                   SUI     '0'      ;TO BINARY
502C DA3E50                 JC      OBIN4    ; < 0
502F FE08                   CPI     8
5031 D24550                 JNC     ERROR    ; > 8
5034 29                     DAD     H        ;TIMES 2
5035 29                     DAD     H        ;TIMES 4
5036 29                     DAD     H        ;TIMES 8
5037 5F                     MOV     E,A      ;NEW BYTE
5038 1600                   MVI     D,0
503A 19                     DAD     D        ;ADD NEW BYTE
503B C32450                 JMP     OBIN2    ;NEXT
                    ;
                    ; CHECK FOR BLANK AT END
                    ;
503E FEF0           OBIN4:  CPI     (' '-'0') AND 0FFH
5040 C24550                 JNZ     ERROR    ;NOT BLANK
5043 D1             OBIN3:  POP     D        ;RESTORE
5044 C9                     RET
                    ;
```

```
                  ; PRINT ? ON IMPROPER INPUT
                  ;
     5045 E1      ERROR:  POP     H          ;RAISE STACK
     5046 E1              POP     H
     5047 3E3F            MVI     A,'?'
     5049 CD0658          CALL    OUTT
     504C C30050          JMP     START      ;TRY AGAIN
```

This routine will convert a string of ASCII-encoded octal characters into a 16-bit binary number in the HL register pair. The current value in the HL register pair is multiplied by 8 (the number base) by performing three DAD H instructions. The new byte is converted from ASCII to binary by subtracting an ASCII zero. It is checked at this time to ensure that it is in the proper octal range of 0 to 7. The addition of the new digit to the present value is more complicated than it was for the binary or hex routines. The problem is that there can be a carry out from the low-order byte. For this reason, the new byte is placed into the DE register pair, then combined with the value in HL by using the double-precision DAD D instruction.

CONVERSION OF THREE ASCII OCTAL CHARACTERS
TO AN 8-BIT BINARY NUMBER IN REGISTER C

The routine given in Listing 8.7 will convert exactly three ASCII-encoded octal characters into an 8-bit octal number in register C. The routine is programmed for fixed-format input; therefore, exactly three characters must be given. Assemble the program, load it into memory, and start it up. Type in the following octal numbers, including the leading zeros.

```
>000
00
>010
08
>020
10
>177
7F
>377
FF
```

Since the largest 8-bit number is 255 decimal or 377 octal, the first digit must be in the range 0–3. The remaining two digits must be in the range 0–7. A check is made to ensure that the characters are in the proper range. The first ASCII character in the input string is converted to binary by subtracting an ASCII zero. The result is multiplied by 8 with three ADD A instructions and the result is saved in the C register. The next character is converted to binary and added to the first with the ORA C instruction. The new sum is multiplied by 8 again with three ADD A instructions, then saved in the C register. Finally, the third character is converted to binary and added in. The final result is moved to the C register.

Listing 8.7. ASCII octal 8-bit binary in C.

```
                     ; IF THREE DIGITS, LEFT ONE MUST BE <4
                     ;
                     ; THIS PROGRAM IS DESIGNED TO OPERATE
                     ; WITH THE SYSTEM MONITOR AT 5800 HEX
                     ;
                     ; JAN 22, 80
                     ;
5000                 ORG     5000H
                     ;
5800 =       MONIT   EQU     5800H
5806 =       OUTT    EQU     MONIT+6
580C =       INPLN   EQU     MONIT+0CH
580F =       GETCH   EQU     MONIT+0FH
5812 =       OUTHX   EQU     MONIT+12H
                     ;
5000 3E0D    START:  MVI     A,0DH     ;CARR RET
5002 CD0658          CALL    OUTT
5005 3E0A            MVI     A,0AH     ;LINE FEED
5007 CD0658          CALL    OUTT
500A CD0C58          CALL    INPLN     ;GET A LINE
500D CD1B50          CALL    OCT8      ;OCT/BIN
5010 CD1258          CALL    OUTHX     ;PRINT HEX
5013 3E20            MVI     A,' '     ;BLANK
5015 CD0658          CALL    OUTT
                     ;
                     ; THE NEXT INSTRUCTION IS NEEDED WHEN
                     ; THE ROUTINE IN LISTING 8.14 IS USED
                     ;       CALL    OCT       ;BIN TO ASCII
5018 C30050          JMP     START     ;NEXT VALUE
                     ;
                     ; CONVERT ASCII-ENCODED OCTAL
                     ; TO 8-BIT BINARY NUMBER IN C
                     ;
501B CD3550  OCT8:   CALL    OCTIN     ;1ST CHAR
501E FE04            CPI     4         ;FIRST
5020 D24750          JNC     ERROR     ;TOO LARGE
5023 87              ADD     A         ;TIMES 2
5024 87              ADD     A         ;TIMES 4
5025 87              ADD     A         ;TIMES 8
5026 4F              MOV     C,A       ;SAVE BYTE
5027 CD3550          CALL    OCTIN     ;2ND CHAR
502A B1              ORA     C         ;COMBINE
502B 87              ADD     A         ;TIMES 2
502C 87              ADD     A         ;TIMES 4
502D 87              ADD     A         ;TIMES 8
502E 4F              MOV     C,A
502F CD3550          CALL    OCTIN     ;3RD CHAR
5032 B1              ORA     C         ;COMBINE
5033 4F              MOV     C,A       ;SAVE IN C
5034 C9              RET
                     ;
                     ; CONVERT INPUT CHARACTER 0-7 TO BINARY
                     ;
5035 CD0F58  OCTIN:  CALL    GETCH
5038 DA4650          JC      ERR2      ;NO CHAR
503B D630            SUI     '0'       ;ASCII BIAS
503D DA4650          JC      ERR2      ;TOO SMALL
```

```
5040 FE08                CPI      8
5042 D24650              JNC      ERR2      ;TOO LARGE
5045 C9                  RET
                    ;
                    ; PRINT ? ON IMPROPER INPUT
                    ;
5046 C1       ERR2:      POP      B         ;RAISE STACK
5047 C1       ERROR:     POP      B
5048 3E3F                MVI      A,'?'
504A CD0658              CALL     OUTT
504D C30050              JMP      START     ;TRY AGAIN
```

CONVERSION OF TWO ASCII BCD DIGITS
TO AN 8-BIT BINARY NUMBER IN REGISTER C

The binary coded decimal (BCD) notation was introduced in Chapter 2. This method of encoding is less efficient than the binary notation. It takes more memory space to encode numbers, and mathematical operations can be considerably slower. The BCD notation, however, has two advantages. One is that conversion from decimal to BCD is simpler than conversion from decimal to binary. The second advantage is freedom from round-off error.

The conversion routine given in Listing 8.8 accepts exactly two ASCII-encoded decimal digits and converts them into an 8-bit BCD number in the C register. The routine can be repeatedly called to convert numbers with more than two characters.

```
Listing 8.8. ASCII hex to BCD in C.

                    ; THIS PROGRAM IS DESIGNED TO OPERATE
                    ; WITH THE SYSTEM MONITOR AT 5800 HEX
                    ;
                    ; JAN 13, 80
                    ;
5000                ORG      5000H
                    ;
5800 =              MONIT    EQU      5800H
5806 =              OUTT     EQU      MONIT+6
580C =              INPLN    EQU      MONIT+0CH
580F =              GETCH    EQU      MONIT+0FH
5812 =              OUTHX    EQU      MONIT+12H
                    ;
5000 3E0D  START:   MVI      A,0DH     ;CARR RET
5002 CD0658         CALL     OUTT
5005 3E0A           MVI      A,0AH     ;LINE FEED
5007 CD0658         CALL     OUTT
500A CD0C58         CALL     INPLN     ;GET A LINE
500D CD2050  RDHL2: CALL     HEX2      ;LEFT CHAR
5010 87             ADD      A         ;TIMES 2
5011 87             ADD      A         ;TIMES 4
5012 87             ADD      A         ;TIMES 8
5013 87             ADD      A         ;TIMES 16
5014 4F             MOV      C,A       ;SAVE
```

```
5015  CD2050            CALL    HEX2    ;RIGHT CHAR
5018  B1                ORA     C       ;COMBINE
5019  4F                MOV     C,A
501A  CD1258            CALL    OUTHX   ;PRINT
501D  C30050            JMP     START   ;NEXT
                    ;
5020  CD0F58   HEX2:    CALL    GETCH   ;HEX CHAR
                    ;
                    ; CONVERT ASCII CHARACTERS TO BINARY
                    ;
5023  D630     NIB:     SUI     '0'     ;ASCII BIAS
5025  DA2B50            JC      ERROR   ; < 0
5028  FE0A              CPI     10
502A  D8                RC              ;NUMBER 0-9
                    ;
                    ; PRINT ? ON IMPROPER INPUT
                    ;
502B  3E3F     ERROR:   MVI     A,'?'
502D  CD0658            CALL    OUTT
5030  C30050            JMP     START   ;TRY AGAIN
                    ;
5033              END
```

With the BCD notation, there is a 2:1 correspondence between the number of BCD digits and the necessary number of bytes. Or, put another way, two decimal digits are stored in each byte. This arrangement is sometimes called *packed decimal.* The right decimal digit is encoded in the low-order four bits and the left digit is encoded into the high-order four bits.

$$
\begin{array}{ll}
38 & 0011\ 1000 \\
27 & 0010\ 0111 \\
59 & 0101\ 1001
\end{array}
$$

BCD encoding involves essentially the same steps as does the hex-to-binary routine, except that only the characters 0 through 9 are allowed. The bit patterns corresponding to the hexadecimal numbers A through F are not allowed.

CONVERSION OF AN 8-BIT BINARY NUMBER IN C
TO A STRING OF EIGHT ASCII BINARY CHARACTERS

In the first part of this chapter we developed programs to convert strings of ASCII-encoded characters into binary numbers. The programs in the following sections will perform the reverse operation. Binary numbers will be converted into strings of ASCII-encoded characters. Furthermore, we will combine the new routines with those already developed so that they may be more easily tested.

The program shown in Listing 8.9 can be used to convert an 8-bit binary number in register C into eight ASCII-encoded binary characters. The resulting characters are sent to the console in this case, but they could be

placed into sequential memory locations instead. This routine is incorporated into the system monitor developed in Chapters 6 and 7.

```
Listing 8.9  Binary in C to ASCII binary.

                    ; THIS PROGRAM IS DESIGNED TO RUN WITH
                    ; THE SYSTEM MONITOR AND WITH THE
                    ; PROGRAM SHOWN IN LISTING 8.1
                    ;
                    ; PRINT AN 8-BIT BINARY NUMBER IN C AS
                    ; 8 ASCII-ENCODED BITS
                    ;
504A 0608   BITS:   MVI     B,8     ;8 BITS
504C 79     BIT2:   MOV     A,C     ;GET BYTE
504D 87             ADD     A       ;SET CARRY
504E 4F             MOV     C,A     ;PUT BACK
504F 3E18           MVI     A,'0'/2 ;HALF OF 0
5051 8F             ADC     A       ;DOUBLE+CARRY
5052 CD0658         CALL    OUTT    ;ONE BIT
5055 05             DCR     B       ;COUNT
5056 C24C50         JNZ     BIT2    ;8 TIMES
5059 C9             RET
            ;
505A                END
```

Make a duplicate copy of the source program shown in Listing 8.1. This routine was used to convert ASCII-encoded binary characters into an 8-bit binary number in C. Remove the semicolon from the instruction that reads

```
;       CALL    BITS    ;BIN TO ASCII
```

Also delete the END directive if you used one. Add the lines given in Listing 8.9 to the end of the program.

The new routine works in the following way. Register B is initialized with the value of 8, the number of bits to be generated. Register C begins with the original binary byte. The bits of this byte are shifted to the left one at a time into the carry flag. The carry flag is then added to an ASCII zero to produce a 0 or a 1 at the console. For the 8080 version, the byte is moved to the accumulator, shifted left with an add instruction, then returned to register C.

If the current high-order bit is a zero, then the carry flag is reset and a zero is printed. If the current high-order bit is a 1, then the carry flag is set and a 1 is printed. The count in the B register is decremented after each character is printed. When the count reaches zero, the process is terminated.

Notice that the addition of the carry flag to the ASCII zero could have been accomplished with the instructions

```
MVI     A,'0'
ACI     0
```

However, this will require four bytes. The code we will use, which is not so obvious, requires only three bytes.

```
MVI     A,'0'/2
ADC     A
```

If you have a Z-80 CPU, this routine can be simplified and shortened by three bytes. Performing the rotation directly in the C register reduces the program by one byte. Two additional bytes are gained by using the decrement B, jump-not-zero operation. Now the accumulator can be zeroed with an exclusive-or operation and the carry can be added directly to an ASCII zero.

```
BITS:   LD      B,8       ;8 BITS
BIT2:   XOR     A         ;ZERO A
        SLA     L         ;SHIFT L LEFT
        ADC     A,'0'     ;ADD CARRY TO 0
        CALL    OUTT      ;SEND
        DJNZ    BIT2      ;8 TIMES
        RET
```

Assemble the combined program, load it into memory, and start it up. Be sure that the monitor is in place at the address of MONIT. The new binary-to-ASCII binary routine has been added in addition to the original binary to ASCII hex in the system monitor (OUTHX). Consequently, each number will now be rendered in both hex and binary. Type in the following binary numbers.

```
>0                  (you type this)
00 00000000         (both hex and binary are given)
>1
01 00000001
>101
05 00000101
>10101010
AA 10101010
>11110000
F0 11110000
```

Remember that the error-correction features of the monitor are available. If you inadvertently type a control-X, you will end up in the monitor itself. You can return from the monitor to the new program, however, by typing

```
>G5000
```

if this is where you assembled the new routine.

CONVERSION OF AN 8-BIT BINARY NUMBER
INTO THREE ASCII DECIMAL CHARACTERS

An 8-bit binary number can be converted into a string of ASCII-encoded decimal characters by repeated subtraction of powers of 10, the number base. The corresponding decimal number will lie in the range of zero to 255. The value of 100 (decimal) is repeatedly subtracted from the original binary number until the result becomes negative. One less than the number of subtractions is the number of hundreds in the decimal form. The result, which in this case can only be 0, 1, or 2, is added to the value of an ASCII zero, then sent to the console.

As an example of the 100s subtraction, consider the number 137.

$$
\begin{array}{rl}
137 & \\
-100 & \text{(one subtraction)} \\
\hline
37 & \\
-100 & \text{(too many)} \\
\hline
\text{(negative number)} &
\end{array}
$$

Since there was one subtraction of 100 before the number became negative, the number is in the range 100 to 199.

The value of the last 100 is added back to make the number positive again. Then the value of 10 is repeatedly subtracted from the new value until a negative result is again obtained. The number of tens in the decimal form is one smaller than the number of subtractions. This count is added to an ASCII zero and sent to the console for the middle digit. The value of ten is added back to the remainder. This adjusted remainder is then added to an ASCII zero to produce the units digit. It too is sent to the console.

Continuing with the example:

$$
\begin{array}{rl}
\text{(negative number)} & \\
+100 & \text{(add back last 100)} \\
\hline
37 & \\
-10 & \text{(first subtraction)} \\
\hline
27 & \\
-10 & \text{(2nd subtraction)} \\
\hline
17 & \\
-10 & \text{(3rd subtraction)} \\
\hline
7 & \\
-10 & \text{(too many)} \\
\hline
\text{(negative number)} & \\
+10 & \text{(add back last 10)} \\
\hline
7 & \text{(units)}
\end{array}
$$

Since there were three subtractions of 10 before the remainder became negative, the middle digit is a 3. Finally, the right digit is 7, the remainder after the last subtraction of 10.

Lisiting 8.10 gives the instructions for the conversion of an 8-bit binary number in register H. Register D initially contains the value of 100 (decimal) that is to be repeatedly subtracted from the number in H. As soon as the result of the subtraction becomes negative, the last 100 is added back, and the value in D is changed to a 10 by subtraction of 90. Register C is used to count the number of subtractions. It is initialized with the value of one less than an ASCII zero to simplify the conversion.

```
Listing 8.10. Binary in A to ASCII decimal.

              # THIS PROGRAM IS DESIGNED TO RUN WITH
              # THE SYSTEM MONITOR AND WITH THE
              # PROGRAM SHOWN IN LISTING 8.4
              #
              # FEB 27, 80
              #
              #
              # PRINT BINARY NUMBER IN A AS ASCII
              # DECIMAL DIGITS. LEADING ZEROS SUPPRESSED
              #
5057 D5       DEC8:   PUSH    D
5058 C5               PUSH    B
5059 1E00             MVI     E,0       #LEADING 0 FLAG
505B 1664             MVI     D,100
505D 0E2F     DEC81:  MVI     C,'0'-1
505F 0C       DEC82:  INR     C
5060 92               SUB     D         #100 OR 10
5061 D25F50           JNC     DEC82     #STILL +
5064 82               ADD     D         #ADD BACK
5065 47               MOV     B,A       #REMAINDER
5066 79               MOV     A,C       #GET 100/10
5067 FE31             CPI     '1'       #ZERO?
5069 D27250           JNC     DEC84     #YES
506C 7B               MOV     A,E       #CHECK FLAG
506D B7               ORA     A         #RESET?
506E 79               MOV     A,C       #RESTORE BYTE
506F CA7750           JZ      DEC85     #LEADING ZERO
5072 CD0658   DEC84:  CALL    OUTT      #PRINT IT
5075 1EFF             MVI     E,0FFH    #SET 0 FLAG
5077 7A       DEC85:  MOV     A,D
5078 D65A             SUI     90        #100 TO 10
507A 57               MOV     D,A
507B 78               MOV     A,B       #REMAINDER
507C D25D50           JNC     DEC81     #AGAIN
507F C630             ADI     '0'       #ASCII BIAS
5081 CD0658           CALL    OUTT
5084 C1               POP     B
5085 D1               POP     D
5086 C9               RET
              #
5087                  END
```

There is an additional feature added to this routine: leading-zero suppression. Leading zeros are typically suppressed when a number is expressed

in decimal form. On the other hand, leading zeros are commonly left in place for binary, octal, and hexadecimal numbers. Thus, we write

$$1$$
$$2$$
$$18$$
$$197$$
$$207$$

for decimal numbers, but

00001111   (binary)
      040   (octal)
     0FE3   (hexadecimal)

for the others.

One reason for keeping leading zeros is to make it easier to distinguish octal or hex numbers from decimal numbers. With this convention, the number 0137 would be interpreted as an octal or hex value rather than a decimal number. The suppression of leading zeros is not a difficult task, but it does require some additional code. It is not sufficient to merely remove all zeros, for then the number 0307 becomes 37.

One technique is to utilize a zero-suppression flag which is initially reset. Zeros are omitted as long as the flag remains reset. Then the flag is set when the first nonzero character is encountered. Subsequent zeros are not removed since the flag is set.

The necessary zero-suppression code has been included in the routine shown in Listing 8.10. Register E is used for the flag; it is initially reset. Then each character is checked with a CPI '1' instruction to see if it is an ASCII zero. If the value is not a zero, it is printed and the flag is set to FF hex. On the other hand, if the digit is a zero, the flag is checked. If it is found to be reset, the zero is not printed. Only three decimal characters can be produced from the original byte; consequently, just the first two need to be checked. If the value of the byte is zero, a single ASCII zero is printed.

The B, C, D, and E registers are utilized in the operations. Consequently, the original values are initially saved on the stack, then restored at the conclusion of the routine.

Duplicate the program shown in Listing 8.4, the ASCII-hex to binary routine. Keep one of the copies as a backup, then rename the other one HEXDEC.ASM. Remove the semicolon at the beginning of the line

```
;        CALL    DEC8
```

and remove the END directive at the end of the program. Add the lines given in Listing 8.10. Assemble the combination program, load it into memory, and start it up by branching to the address of START. We have coupled the 16-bit hex input program with the 8-bit decimal output program. Consequently, only the high-order byte will be converted to decimal. This is the

byte in the H register. Try the combined program with the following hex numbers.

```
>0
0000 0
>1
0001 0
>100
0100 1
>A00
0A00 10    (hex A is decimal 10)
>1000
1000 16    (10 hex is 16 decimal)
>FFFF
FFFF 255   (FF hex is 255 decimal)
```

This binary-to-decimal routine can be very useful at the CP/M systems level. Suppose that you want to save a program that starts at 100 hex and runs to 2736 hex. If the decimal routine is incorporated into a hexadecimal math routine of the system monitor, you have only to type

```
>H2800 100        (command)
2900 2700 39      (response)
```

The response of 39 is the decimal number of 256-byte blocks to be saved. Then you can give the CP/M command

```
A>SAVE 39  FILENAME.EXT
```

CONVERSION OF A 16-BIT BINARY NUMBER INTO FIVE ASCII DECIMAL CHARACTERS

In the previous section, we developed a routine to convert an 8-bit binary number into three ASCII-encoded decimal characters. We will now write a routine for converting a 16-bit binary number in HL into 5 ASCII-encoded decimal characters. This double-precision decimal number will range from zero to 65,535.

Duplicate the decimal-to-16-bit binary program in Listing 8.2. Remove the semicolon from the line

```
;       CALL    DBIN
```

and the END directive if you used one. Add the program shown in Listing 8.11 to the end.

```
        Listing 8.11   Binary in HL to ASCII decimal.

                         ; THIS PROGRAM IS DESIGNED TO RUN WITH
                         ; THE SYSTEM MONITOR AND WITH THE
                         ; PROGRAM SHOWN IN LISTING 8.2
                         ;
                         ; FEB 22, 79
                         ;
                         ; PRINT BINARY NUMBER IN H,L AS ASCII
                         ; DECIMAL DIGITS. LEADING ZERO SUPPRESSED.
                         ;
5055 0600      BIND:     MVI     B,0        ;LEADING 0 FLAG
5057 11F0D8              LXI     D,-10000   ;2'S COMPL
505A CD7550              CALL    SUBTR      ;10 THOUS
505D 1118FC              LXI     D,-1000
5060 CD7550              CALL    SUBTR      ;THOUS
5063 119CFF              LXI     D,-100
5066 CD7550              CALL    SUBTR      ;HUNDREDS
5069 11F6FF              LXI     D,-10
506C CD7550              CALL    SUBTR      ;TENS
506F 7D                  MOV     A,L
5070 C630                ADI     '0'        ;ASCII BIAS
5072 C30658              JMP     OUTT       ;UNITS
                         ;
                         ; SUBTRACT POWER OF TEN AND COUNT
                         ;
5075 0E2F      SUBTR:    MVI     C,'0'-1    ;ASCII COUNT
5077 0C        SUBT2:    INR     C
5078 19                  DAD     D          ;ADD NEG NUMBER
5079 DA7750              JC      SUBT2      ;KEEP GOING
                         ;
                         ; ONE TOO MANY, ADD ONE BACK
                         ;
507C 7A                  MOV     A,D        ;COMPLEMENT
507D 2F                  CMA                ; D,E
507E 57                  MOV     D,A
507F 7B                  MOV     A,E
5080 2F                  CMA
5081 5F                  MOV     E,A
5082 13                  INX     D          ;AND
5083 19                  DAD     D          ;ADD BACK
5084 79                  MOV     A,C        ;GET COUNT
                         ;
                         ; CHECK FOR ZERO
                         ;
5085 FE31                CPI     '1'        ;LESS THAN 1?
5087 D29150              JNC     NZERO      ;NO
508A 78                  MOV     A,B        ;CHECK 0 FLAG
508B B7                  ORA     A          ;SET?
508C 79                  MOV     A,C        ;RESTORE
508D C8                  RZ                 ;SKIP LEADING 0
508E C30658              JMP     OUTT       ;INTERIOR ZERO
                         ;
                         ; SET FLAG FOR NON-ZERO CHARACTER
                         ;
5091 06FF      NZERO:    MVI     B,0FFH     ;SET 0 FLAG
5093 C30658              JMP     OUTT       ;PRINT IT
                         ;
5096                     END
```

This 16-bit version is similar to the 8-bit version of the previous section. This time we start with the subtraction of the decimal value 10,000 instead of 100. The number of subtractions is counted as before. When the result becomes negative, the last 10,000 is added back. The number of subtractions that was performed is the desired digit for the ten-thousandths position.

Since the 8080 CPU does not incorporate a 16-bit subtraction operation, the subtraction is obtained by adding the corresponding two's complement

```
LXI       D,-10000
 .  .  .
 .  .  .
DAD       D
```

The carry flag will be set for each addition (subtraction) except the last. The carry flag is then reset for the operation corresponding to the result becoming negative. The JC instruction in subroutine SUBTR causes the computer to loop the correct number of times. Suppose, for example, that the binary number in HL corresponds to the decimal number 32,128. This is the equivalent of the hexadecimal value 7D80. The two's complement of 10,000 is D8F0 hex. The sum of these two is

```
decimal     hexadecimal
32,128        7D80
-10,000      +D8F0
-------       ----
22,128        5670
```

Thus the addition of 7D80 and D8F0 hex is equivalent to subtracting 10,000 from 32,128.

The last subtraction that causes the result to become negative has to be undone. This could be accomplished by adding 10,000. However, the addition is accomplished in subroutine SUBTR which is also used to add back the 1,000, 100, and 10 for the equivalent steps of each decade. Therefore, we won't know, in general, which value to add. The solution is to obtain the necessary value from the two's complement of the two's complement for the current value. This two's complement is first obtained by complementing both the D and the E register to produce the one's complement. Then the DE register pair is incremented. Subroutine SUBTR is first called with DE set to -10,000, then to -1,000, -100, and -10. At this point, the units digit is contained in the L register.

This double-precision routine also incorporates instructions for suppressing leading zeros. The approach is similar to the one used in the previous section except that the H register is used for the zero flag.

Assemble the combination program, load it into memory, and start it up. Enter the following decimal numbers. The response will include both the hexadecimal and the decimal values of the input number.

```
>0
0000 0
>1
0001 1
>100
0064 100
>1024
0400 1024
>65535
FFFF 65535
```

At this point you may want to incorporate decimal numbers into the system monitor. When we incorporated an ASCII-input feature into the monitor we used the apostrophe to indicate this fact. It is customary to precede decimal numbers by a number sign. For example, the following input would indicate decimal input.

```
>H#1024 #200
```

CONVERSION OF AN 8-BIT BINARY NUMBER
INTO TWO ASCII HEXADECIMAL CHARACTERS

The conversion of an 8-bit binary byte into two ASCII-encoded hexadecimal characters is an interesting exercise. The high-order four bits are represented by one hex character, and the low-order four bits are represented by the other hex character. Since the upper character is printed first, the upper four bits are rotated down to the lower position. These new lower four bits are converted to ASCII to produce the first character. Then the original low-order four bits are converted to ASCII to get the second character.

The nibble conversion appears to be straightforward. The upper four bits are zeroed by performing a masking AND with the value of 0F hex. The lower four bits are then converted to ASCII by the addition of an ASCII 0. If the result is in the range 0–9, then the conversion is complete. Otherwise, a binary 7 is added to the result, converting it to an ASCII-encoded letter of A through F.

To see why this conversion works, look at the ASCII table in Appendix A. The ASCII number 9 has a decimal value of 57. The ASCII letter A has a decimal value of 65. But the hexadecimal value of A follows the value of 9. Therefore, we need to add 7 to any valid hex number larger than 9 to convert it into the appropriate ASCII letter A through F.

The program shown in Listing 8.12 will convert an 8-bit binary number in the C register into two ASCII characters and send them to the console. Duplicate the program in Listing 8.5. Remove the external reference to subroutine OUTHX near the beginning.

```
OUTHX    EQU      MONIT+12H
```

Our new program will perform the same function. Also remove the final END directive if you used one. Copy the lines from Listing 8.12 on the end of the program. Assemble the combined program, load it into memory, and

start it up. Our monitor will still have to be in memory since we will need the I/O routines. This current version, Listing 8.12, with the built-in binary-to-hex routine, should respond exactly the same as the earlier version, Listing 8.5. The only difference is that we are converting binary to hex within the program rather than using a routine in the monitor.

```
Listing 8.12 Binary in C to ASCII hex

                    ; THIS PROGRAM IS DESIGNED TO RUN WITH
                    ; THE SYSTEM MONITOR AND WITH THE
                    ; PROGRAM SHOWN IN LISTING 8.5
                    ;
                    ; JAN 18, 80
                    ;
                    ; ROUTINE TO OUTPUT 2 HEX CHARACTERS FROM C
                    ; 8-BIT BINARY TO ASCII HEX CONVERSION
                    ;
5043 79      OUTHX:  MOV      A,C        ;GET BYTE
5044 1F              RAR                 ;ROTATE
5045 1F              RAR                 ; FOUR
5046 1F              RAR                 ; BITS TO
5047 1F              RAR                 ; THE RIGHT
5048 CD4C50          CALL     HEX1       ;UPPER CHAR
504B 79              MOV      A,C        ;LOWER CHAR
             ;
504C E60F    HEX1:   ANI      0FH        ;LOW 4 BITS
504E C630            ADI      '0'        ;ASCII ZERO
5050 FE3A            CPI      '9'+1      ;0 TO 9
5052 DA0658          JC       OUTT       ;YES
5055 C607            ADI      7          ;CONVERT
5057 C30658          JMP      OUTT       ;A TO F
             ;
505A                 END
```

The algorithm used to convert the binary nibble to a hex character clearly demonstrates the technique. But there is a more efficient method for CPUs such as the 8080 and Z-80 that incorporate the decimal adjust accumulator (DAA) instruction. Change the second, third, fourth, and fifth lines of subroutine HEX1 so the subroutine looks like

```
HEX1:   ANI      0FH      (same)
        ADI      90H      (new)
        DAA               (new)
        ACI      40H      (new)
        DAA               (new)
        JMP      OUTT     (same)
```

Conversion of a 16-bit binary value into four hex characters is obtained by calling the 8-bit routine twice. For example, the HL register pair can be printed with the following routine.

```
OUTHL:  MOV      C,H
        CALL     OUTHX
        MOV      C,L
        CALL     OUTHX
```

Conversion of a binary number to a string of ASCII-encoded BCD characters does not require a special routine. It is performed simply by calling the binary-to-hex routine OUTHX.

CONVERSION OF A 16-BIT BINARY NUMBER INTO SIX ASCII OCTAL CHARACTERS

A 16-bit binary number in the HL register pair can be converted into six ASCII-encoded octal characters by repeatedly shifting the double register to the left. We make use of the double-register add instruction DAD H. This instruction adds the register pair HL to itself. The operation is equivalent to a double-precision arithmetic shift left. All 16 bits are shifted left and a zero is moved into the lowest order bit. The carry flag is set if the original highest-order bit was a logical one. The carry bit is reset otherwise.

The routine is shown in Listing 8.13. As the bits of the double register are shifted out the high end, they are converted to the corresponding octal number in the accumulator. The largest 16-bit octal number is 177777; consequently, the first octal character (starting from the left) can only be a zero or a one. The remaining five characters can range from zero through 7. They are obtained from groups of three bits.

```
Listing 8.13 Binary in HL to ASCII octal.

                    ; THIS PROGRAM IS DESIGNED TO RUN WITH
                    ; THE SYSTEM MONITOR AND WITH THE
                    ; PROGRAM SHOWN IN LISTING 8.6
                    ;
                    ; JAN 18, 80
                    ;
                    ; ROUTINE TO OUTPUT A 16-BIT BINARY
                    ; VALUE IN H,L AS OCTAL CHARACTERS
                    ;
5052 E5     OUTOCT: PUSH    H           ;SAVE VALUE
5053 C5             PUSH    B
5054 0605           MVI     B,5         ;5 CHAR
5056 AF             XRA     A           ;ZERO
5057 29             DAD     H           ;HIGH BIT
5058 CE30           ACI     '0'         ;ADDED IN
505A CD0658         CALL    OUTT        ;PRINT IT
505D 3E06   OCT2:   MVI     A,6         ;ROTATE 60Q
505F 29             DAD     H           ;CARRY
5060 17             RAL                 ;ROTATE TO A
5061 29             DAD     H           ;AGAIN
5062 17             RAL                 ;TO A
5063 29             DAD     H           ;3RD TIME
5064 17             RAL                 ;TO A
5065 CD0658         CALL    OUTT        ;PRINT CHAR
5068 05             DCR     B           ;COUNT
5069 C25D50         JNZ     OCT2        ;5 TIMES
506C C1             POP     B
506D E1             POP     H
506E C9             RET
                    ;
506F                END
```

The first step shown in Listing 8.13 saves the HL and BC registers on the stack. This operation may not always be necessary. The XRA operation is used to zero the accumulator. It must be performed before the DAD H instruction since it resets the carry flag. The DAD instruction will set the carry flag if the high-order bit was a 1, or reset the flag if the high-order bit was a zero. The carry flag is then added to an ASCII zero and sent to the console.

The remaining five digits are generated in a loop starting at label OCT2. Register B is preloaded with the value of 5 to count the remaining digits. We need to transfer the current three high-order bits from the H register into the accumulator. This is accomplished by three DAD H instructions. After each one, the carry flag will reflect the state of the most recent high-order bit of H. After each DAD instruction, we perform a rotate accumulator instruction. This moves the carry bit into the low-order bit of A. After three such operations, the three low-order bits of the accumulator will contain the proper octal bit pattern for the appropriate character. But they are in binary form and we need to convert them to ASCII for printing.

The bit pattern for the ASCII zero is 011 0000. Notice that it contains zeros in the lower four bit positions. At the beginning of the OCT2 loop we preloaded the accumulator with a binary 6 which has a bit pattern of 000 0110. At the conclusion of the OCT2 loop, the three rotations will convert this binary 6 into a 60 octal which is equivalent to an ASCII zero. This effectively converts the three lower-order bits, shifted in from the carry flag, into ASCII-encoded octal.

The Z-80 version can be a little shorter if the instruction

```
DJNZ      OCT2
```

is used in place of

```
DCR       B
JNZ       OCT2
```


CONVERSION OF AN 8-BIT BINARY NUMBER INTO THREE ASCII OCTAL CHARACTERS

In the previous section we derived a subroutine for the conversion of a 16-bit binary number into ASCII characters. The conversion of an 8-bit binary number to octal will be considered here. We could use the H,L double register, as previously, to perform the necessary shifts. However, if the H,L register is needed for something else, such as a pointer to memory, then another method would be better.

The routine shown in Listing 8.14 performs the needed rotations in the accumulator. The original binary byte is in the C register. The byte is moved to the accumulator and two left circular rotate instructions are performed. This effectively moves the two high-order bits down to the two low-order

positions. It is equivalent to performing six right circular rotations. The remaining bits are zeroed with a logical AND 3 step. The ubiquitous ASCII zero is added, and the result is sent to the console.

The middle character is obtained by rotating the original byte to the right. A logical AND 7 isolates these low-order bits. The ASCII zero is added and the byte is sent to the console. The original byte is retrieved a third time. Now the three bits of the third character are properly positioned. Hence no rotation is needed. The masking AND operation is still needed, however. Finally, the ASCII zero is added prior to printing.

Type the program shown in Listing 8.14. Add the new program to the end of the octal-to-binary program shown in Listing 8.7. Assemble the combination, load it into memory, and branch to the beginning. Remember that the input requires exactly three octal characters. If less than three are used, an error message of a question mark will be printed. If more than three characters are typed, only the first three will be used.

```
Listing 8.14. 8-bit binary in C to ASCII

                        ; THIS PROGRAM IS DESIGNED TO RUN WITH
                        ; THE SYSTEM MONITOR AND WITH THE
                        ; PROGRAM SHOWN IN LISTING 8.7
                        ;
                        ; JAN 22, 80
                        ;
                        ; ROUTINE TO OUTPUT AN 8-BIT BINARY
                        ; VALUE AS THREE OCTAL CHARACTERS
                        ;
5053 79        OCT:     MOV     A,C        ;GET IT
5054 07                 RLC                ;2 HIGH BITS
5055 07                 RLC
5056 E603               ANI     3          ;MASK
5058 CD6550             CALL    OCT3
505B 79                 MOV     A,C        ;GET AGAIN
505C 0F                 RRC                ;MIDDLE BITS
505D 0F                 RRC
505E 0F                 RRC
505F CD6350             CALL    OCT2
5062 79                 MOV     A,C        ;RIGHT BITS
5063 E607      OCT2:    ANI     7          ;3 BITS
5065 C630      OCT3:    ADI     '0'        ;ASCII BIAS
5067 C30658             JMP     OUTT       ;PRINT
                        ;
506A                    END
```

CONVERSION OF A 16-BIT BINARY NUMBER TO SPLIT OCTAL

Some of the 8080 and Z-80 instructions can have either 8-bit or 16-bit operands. Typical 8-bit operations for the 8080 are

```
MVI     A,10
ADI     3
ANI     7
```

The 16-bit operations include

```
CALL    100H
JMP     5005H
LXI     H,0
```

But the 8-bit architecture of microcomputers means that 16-bit operands are stored as two consecutive bytes. Each byte can be represented as two hexadecimal characters. And the entire 16-bit value can be represented by a combination of all four of these hex characters. For example, the 16 bits

11110000 10101010

can be represented with the hex characters

F0AA

Alternately, the left byte can be represented by an F0 hex, and the right byte can be expressed as AA hex. There is no problem here since each hex character represents four bits, and both 8 and 16 are evenly divisible by 4.

Octal representation is more complex. In this case, each octal character represents three bits (or sometimes two). Since neither 8 nor 16 is evenly divisible by 3, a problem can occur. Consider the 16-bit value

1 111 010 011 101 010

It can be represented in the octal notation as

172352

This is the result that the program in Listing 8.13 would produce at the system console. The problem is that the 16 bits are actually stored in two adjacent 8-bit locations. If the bit pattern is grouped into 8-bit bytes, it looks like this.

11 110 100   11 101 010

In this arrangement, the two corresponding octal bytes are represented as

364 352

The result, which has been termed split octal or crazy octal, looks very different from the corresponding 16-bit octal value of 172352. The two octal bytes of split-octal notation are sometimes separated by a colon to distinguish the representation from the regular 16-bit octal.

364:352

The split-octal notation can be readily implemented, as shown in Listing 8.15. This program is adapted from the 8-bit octal-to-binary and binary-to-octal routines given in Listings 8.7 and 8.14. The first part takes two separate octal bytes and converts them to an 8-bit binary number. The second part converts the binary byte into two octal bytes. Each split-octal number is entered from the console as two groups of three characters. A space or colon can be used to separate the two parts.

```
Listing 8.15. Split-octal routines

                        ; 6 OCTAL CHARACTERS SEPARATED BY A
                        ; SPACE ARE ENTERED FROM THE CONSOLE.
                        ; A 16-BIT BINARY NUMBER IS PRODUCED
                        ; IN D,E. THIS IS RECONVERTED TO OCTAL
                        ;
                        ; THIS PROGRAM IS DESIGNED TO OPERATE
                        ; WITH THE SYSTEM MONITOR AT 5800 HEX
                        ;
                        ; JAN 22, 80
                        ;
  5000                  ORG      5000H
                        ;
  5800 =               MONIT    EQU      5800H
  5806 =               OUTT     EQU      MONIT+6
  580C =               INPLN    EQU      MONIT+0CH
  580F =               GETCH    EQU      MONIT+0FH
  5812 =               OUTHX    EQU      MONIT+12H
                        ;
  5000 3E0D    START:   MVI      A,0DH    ;CARR RET
  5002 CD0658           CALL     OUTT
  5005 3E0A             MVI      A,0AH    ;LINE FEED
  5007 CD0658           CALL     OUTT
  500A CD0C58           CALL     INPLN    ;GET A LINE
  500D CD2350           CALL     OCT88    ;6 OCT CHAR
  5010 4A               MOV      C,D      ;FIRST
  5011 CD1258           CALL     OUTHX    ;TO HEX
  5014 4B               MOV      C,E      ;SECOND
  5015 CD1258           CALL     OUTHX    ;TO HEX
  5018 3E20             MVI      A,' '    ;BLANK
  501A CD0658           CALL     OUTT
  501D CD6850           CALL     OUT80    ;TO BINARY
  5020 C30050           JMP      START    ;NEXT VALUE
                        ;
                        ; 6 SPLIT-OCTAL CHAR TO 16-BIT BINARY
                        ;
  5023 CD3250   OCT88:  CALL     OCT8     ;FIRST
  5026 51               MOV      D,C      ;SAVE
  5027 CD0F58           CALL     GETCH    ;SPACE
  502A DA5F50           JC       ERR3     ;ONLY 1 CHAR
  502D CD3250           CALL     OCT8     ;SECOND
  5030 59               MOV      E,C      ;SAVE
  5031 C9               RET
                        ;
                        ; CONVERT ASCII-ENCODED OCTAL
                        ; TO 8-BIT BINARY NUMBER IN C
                        ;
```

```
5032 CD4C50    OCT8:    CALL    OCTIN    ;1ST CHAR
5035 FE04               CPI     4        ;FIRST
5037 D25E50             JNC     ERROR    ;TOO LARGE
503A 87                 ADD     A        ;TIMES 2
503B 87                 ADD     A        ;TIMES 4
503C 87                 ADD     A        ;TIMES 8
503D 4F                 MOV     C,A      ;SAVE BYTE
503E CD4C50             CALL    OCTIN    ;2ND CHAR
5041 B1                 ORA     C        ;COMBINE
5042 87                 ADD     A        ;TIMES 2
5043 87                 ADD     A        ;TIMES 4
5044 87                 ADD     A        ;TIMES 8
5045 4F                 MOV     C,A
5046 CD4C50             CALL    OCTIN    ;3RD CHAR
5049 B1                 ORA     C        ;COMBINE
504A 4F                 MOV     C,A      ;SAVE IN C
504B C9                 RET
                   ;
                   ; CONVERT INPUT CHARACTER 0-7 TO BINARY
                   ;
504C CD0F58    OCTIN:   CALL    GETCH
504F DA5D50             JC      ERR2     ;NO CHAR
5052 D630               SUI     '0'      ;ASCII BIAS
5054 DA5D50             JC      ERR2     ;TOO SMALL
5057 FE08               CPI     8
5059 D25D50             JNC     ERR2     ;TOO LARGE
505C C9                 RET
                   ;
                   ; PRINT ? ON IMPROPER INPUT
                   ;
505D C1        ERR2:    POP     B        ;RAISE STACK
505E C1        ERROR:   POP     B
505F C1        ERR3:    POP     B
5060 3E3F               MVI     A,'?'
5062 CD0658             CALL    OUTT
5065 C30050             JMP     START    ;TRY AGAIN
                   ;
                   ; 16-BIT BINARY IN D,E TO SPLIT OCTAL
                   ;
5068 4A        OUT8O:   MOV     C,D      ;FIRST BYTE
5069 CD7250             CALL    OCT      ;TO OCT
506C 3E3A               MVI     A,':'
506E CD0658             CALL    OUTT     ;SEPARATOR
5071 4B                 MOV     C,E      ;SECOND
                   ;
                   ; ROUTINE TO OUTPUT AN 8-BIT BINARY
                   ; VALUE AS THREE OCTAL CHARACTERS
                   ;
5072 79        OCT:     MOV     A,C      ;GET IT
5073 07                 RLC              ;2 HIGH BITS
5074 07                 RLC
5075 E603               ANI     3        ;MASK
5077 CD8450             CALL    OCT3
507A 79                 MOV     A,C      ;GET AGAIN
507B 0F                 RRC              ;MIDDLE BITS
507C 0F                 RRC
507D 0F                 RRC
507E CD8250             CALL    OCT2
```

```
5081  79                    MOV     A,C      ;RIGHT BITS
5082  E607        OCT2:     ANI     7        ;3 BITS
5084  C630        OCT3:     ADI     '0'      ;ASCII BIAS
5086  C30658                JMP     OUTT     ;PRINT
                     ;
5089                        END
```

The input number is converted into a 16-bit binary number in the D,E register pair by calling the 8-bit routine twice. The hex value is printed out as usual, then the split-octal version. A colon in the middle separates the two halves.

Assemble the program and try it out.

```
>177 377  (a space separator)
7FFF 177:377
>100:200  (a colon separator)
4080 100:200
```

This completes the base-conversion routines. At this point, you may want to incorporate some of these routines into your system monitor.

CHAPTER NINE

Paper Tape and
Magnetic Tape Routines

It is possible to encode complete programs, such as a BASIC interpreter, into ROM so that calculations, such as the square root of 19, can be performed as soon as the computer is turned on. But more complicated problems will require a source program. If the source program is used frequently, then it would be inconvenient to reenter the source program each time it is needed. One way to avoid this reentry problem is to save the source program somehow and then reload it into the computer when it is needed.

But BASIC is not the only computer language. Some tasks are more easily performed with other languages, such as Pascal or APL. Assembly language is useful for systems programming. A full text editor program has more features than the most complex BASIC interpreter. Thus, it is better not to have the BASIC interpreter in ROM. Instead, a small monitor program, such as the one developed in Chapter 6, can be placed in ROM. We can use this small monitor to load larger programs from an external medium.

The floppy disk is a convenient medium for saving and reloading programs. The cost, however, is greater than other storage media such as paper tape or magnetic tape. Even if a floppy-disk system is utilized for program storage, it might be wise to make backup copies on magnetic or paper tape.

The simplest storage method is to utilize the paper tape accessory available on some Teletype machines. With this approach, a separate computer I/O port is unnecessary. Furthermore, paper tapes can be read directly on the Teletype, without using a computer. The disadvantage of this method is that the transfer rate is low, since the Teletype operates at only ten characters per second.

A more complicated, but faster, method utilizes an ordinary magnetic tape machine designed for home recording. In this case a separate I/O port will usually be necessary, but the advantage is that the recording rate is higher than for paper tape. Common data transfer rates range from 30 to over 120 characters per second.

The frequency response of audio tape recorders is limited to a maximum of 10 to 20 kHz. But since the computer operates at 2 or 4 MHz, the signals from the computer cannot be directly copied onto tape.

One solution is to convert the computer's digital signals into sine waves that can be easily recorded. A digital-to-analog (D/A) circuit is used for this purpose. When the recorded program is subsequently played back into the computer, a separate analog-to-digital (A/D) circuit reverses the process. It converts the signal from a sine wave back into the digital form. The D/A and A/D circuits are combined on a printed circuit board with the usual parallel-to-serial converter for the I/O port.

THE CHECKSUM METHOD

Two separate tape-handling routines are given in this chapter; both may be used with paper tape or magnetic tape. They are both suitable for storing binary object programs, ASCII-encoded source programs, or just a set of numbers. The information is stored in a file consisting of a sequence of records. Each record contains a checksum that is used to detect errors.

Errors can be introduced at several places in the tape-recording and playback process. The proximity of AC power cords to audio signal lines can change the transmitted signal. Oxide layers may fall off the tape, or there may be a defective spot on the recording surface. If the recording and playback heads are dirty, they can incorrectly render the signal. The A/D conversion step, when the tape is played back, can also give rise to errors.

In addition to the data, each record stored on the tape contains the record length, the memory address of the record, and a checksum byte. The checksum byte is obtained by adding all of the data bytes in the record. When the tape is read back, the computer sums up the data and compares the result to the checksum value written on the tape at the end of the record. A discrepancy indicates an error.

Since an 8-bit checksum is used in both programs, there are 256 possible combinations. Any single load error in the record will be discovered by this method. In principle, it is possible that two errors in the same record will combine to produce the expected checksum value. In practice, however, this is not likely to be a problem. Double errors occur much less frequently than single errrors. Furthermore, in a well-tuned system, single errors should be infrequent. They are most likely to be caused by low-quality tape, a dirty head, or a mistuned A/D converter circuit. Buy the best tape you can and clean the heads often. A routine that can be used for aligning the A/D circuit is incorporated in the second tape routine given later in this chapter.

AN ASCII-HEX TAPE PROGRAM

The tape program given in Listing 9.1 is based on an ASCII-encoded hexadecimal format. It can be used to produce paper tapes or magnetic tapes of

computer programs. It can even produce a tape of itself. The program is self-contained and assembled to run at 100 hex. No outside routines are required. An additional feature of this program is that it can punch readable labels on the leader of a paper tape. (Of course, this feature is not very useful for magnetic tape recordings.) The label routine is discussed in the next section of this chapter.

Listing 9.1.Hexadecimal tape routines.

```
                        ; HEXMON: A MONITOR TO DUMP, LOAD, AND
                        ;        VERIFY INTEL HEX CHECKSUM TAPES
                        ;        WITH TAPE LABEL FOR HEADER
                        ;
                                TITLE    'hexmon with tlabel'
                        ;
0100                    ORG      100H
                        ;
                        ;
                        ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                        ;
0010 =                  RLEN     EQU     16      ;RECORD LENGTH
                        ;
0010 =                  CSTAT    EQU     10H     ;CONSOLE STATUS
0011 =                  CDATA    EQU     CSTAT+1 ;CONSOLE DATA
0001 =                  CIMSK    EQU     1       ;IN MASK
0002 =                  COMSK    EQU     2       ;OUT MASK
0006 =                  PSTAT    EQU     6       ;PUNCH STATUS
0007 =                  PDATA    EQU     PSTAT+1 ;PUNCH DATA
0001 =                  PIMSK    EQU     1       ;PUNCH IN MASK
0080 =                  POMSK    EQU     80H     ;PUNCH OUT MASK
                        ;
000D =                  CR       EQU     13      ;CARRAGE RETURN
000A =                  LF       EQU     10      ;LINE FEED
007F =                  DEL      EQU     127
0008 =                  CTRH     EQU     8       ;^H CONSOLE BACKUP
0000 =                  NNULS    EQU     0       ;CONSOLE NULLS
                        ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                        ;
0100 C37D01             START:   JMP     CONTIN
                        ;
                        ; INPUT A BYTE FROM THE CONSOLE
                        ;
0103 DB10               INPUTT:  IN      CSTAT
0105 E601                        ANI     CIMSK
0107 CA0301                      JZ      INPUTT
010A DB11                        IN      CDATA
010C E67F                        ANI     7FH     ;STRIP PARITY
010E C9                          RET
                        ;
                        ; OUTPUT A CHARACTER TO CONSOLE
                        ;
```

```
010F F5          OUTT:   PUSH    PSW
0110 DB10         OUTW:   IN      CSTAT
0112 E602                 ANI     COMSK
0114 CA1001               JZ      OUTW
0117 F1                   POP     PSW
0118 D311                 OUT     CDATA
011A C9                   RET
                  ; OUTPUT H,L TO CONSOLE
                  ; 16-BIT BINARY TO HEX
                  ;
011B 4C          OUTHL:  MOV     C,H      ;FETCH H
011C CD2001               CALL    OUTHX    ;PRINT IT
011F 4D                   MOV     C,L      ;FETCH L, PRINT IT
                  ;
                  ; CONVERT A BINARY NUMBER TO TWO
                  ; HEX CHARACTERS, AND PRINT THEM
                  ;
0120 79          OUTHX:  MOV     A,C
0121 1F                   RAR              ;ROTATE
0122 1F                   RAR              ; UPPER
0123 1F                   RAR              ; CHARACTER
0124 1F                   RAR              ; TO LOWER
0125 CD2901               CALL    HEX1     ;OUTPUT UPPER
0128 79                   MOV     A,C      ;OUTPUT LOWER
                  ;
                  ; OUTPUT A HEX CHARACTER
                  ; FROM LOWER FOUR BITS
                  ;
0129 E60F        HEX1:   ANI     0FH      ;TAKE 4 BITS
012B C690                 ADI     144
012D 27                   DAA              ;DAA TRICK
012E CE40                 ACI     64
0130 27                   DAA              ;ONCE AGAIN
0131 C30F01               JMP     OUTT
                  ;
                  ; CONVERT ASCII CHARACTER FROM CONSOLE
                  ; TO 4 BINARY BITS
                  ;
0134 D630        NIB:    SUI     '0'      ;ASCII BIAS
0136 D8                   RC               ; < '0'
0137 FE17                 CPI     'F'-'0'+1
0139 3F                   CMC              ;INVERT
013A D8                   RC               ;ERROR, > 'F'
013B FE0A                 CPI     10
013D 3F                   CMC              ;INVERT
013E D0                   RNC              ;NUMBER IS 0-9
013F D607                 SUI     'A'-'9'-1
0141 FE0A                 CPI     10
0143 C9                   RET              ;CHARACTER IS A-F
                  ;
                  ; INPUT H,L FROM CONSOLE
                  ;
0144 D5          READHL: PUSH    D
0145 C5                   PUSH    B
0146 210000               LXI     H,0      ;START WITH 0
0149 CD0402      RDHL2:  CALL    GETCH
```

```
014C DA6801              JC      RDHL5    ;END OF LINE
014F CD3401              CALL    NIB      ;CONVERT TO BINARY
0152 DA5E01              JC      RDHL4    ;NOT HEX
0155 29                  DAD     H        ;16-BIT
0156 29                  DAD     H        ; SHIFT LEFT
0157 29                  DAD     H
0158 29                  DAD     H
0159 B5                  ORA     L        ;COMBINE NEW
015A 6F                  MOV     L,A
015B C34901              JMP     RDHL2    ;NEXT
             ;
             ; CHECK FOR COMMA OR BLANK
             ; AT END OF ADDRESS
             ;
015E FEFC    RDHL4:      CPI     ',','-'0' ;COMMA?
0160 CA6801              JZ      RDHL5    ;YES, OK
0163 FEF0                CPI     ' ','-'0' ;BLANK?
0165 C26B01              JNZ     ERROR    ;NO
0168 C1      RDHL5:      POP     B
0169 D1                  POP     D
016A C9                  RET
             ;
016B 3E3F    ERROR:      MVI     A,'?'    ;IMPROPER INPUT
016D CD0F01              CALL    OUTT
0170 C30001              JMP     START    ;TELL HOW AGAIN
             ;
             ; SEND CHRACTERS POINTED TO BY D,E
             ; UNTIL A BINARY ZERO IS FOUND
             ;
0173 1A      SENDM:      LDAX    D        ;NEXT BYTE
0174 B7                  ORA     A        ;SEE IF ZERO
0175 C8                  RZ               ;DONE
0176 CD0F01              CALL    OUTT
0179 13                  INX     D
017A C37301              JMP     SENDM
             ;
017D 312106  CONTIN:     LXI     SP,STACK
0180 118603              LXI     D,SIGN   ;MESSAGE
0183 CD7301              CALL    SENDM    ;SEND IT
             ;
0186 312106  RSTRT:      LXI     SP,STACK
0189 CDAC01              CALL    INPLN    ;GET A LINE
018C CD0402              CALL    GETCH    ;INPUT THE TASK
018F FE57                CPI     'W'      ;DUMP
0191 CA1A02              JZ      PDUMP
0194 FE52                CPI     'R'      ;READ, NO AUTOSTART
0196 CAE602              JZ      PLOAD
0199 FE45                CPI     'E'      ;LOAD AND EXECUTE
019B CAE602              JZ      PLOAD
019E FE56                CPI     'V'      ;VERIFY
01A0 CAE602              JZ      PLOAD
01A3 FE47                CPI     'G'      ;GO SOMEWHERE
01A5 C26B01              JNZ     ERROR
             ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
             ;
```

```
                        ; JUMP TO ANOTHER PROGRAM
                        ;
 01A8 CD4401            CALL      READHL    ;JUMP ADDRESS
 01AB E9       JPCHL:   PCHL                ;OK, GOODBYE
                        ;
                        ; INPUT A LINE FROM THE CONSOLE
                        ; AND PUT IT INTO A BUFFER
                        ;
 01AC CDEE01   INPLN:   CALL      CRLF
 01AF 3E3E              MVI       A,'>'     ;COMMAND PROMPT
 01B1 CD0F01            CALL      OUTT      ;SEND TO CONSOLE
 01B4 212406   INPL2:   LXI       H,IBUFF   ;BUFFER ADDRESS
 01B7 222106            SHLD      IBUFP     ;INITIALIZE POINTER
 01BA 0E00              MVI       C,0       ;INITIALIZE COUNT
 01BC CD0301   INPLI:   CALL      INPUTT    ;CHAR FROM CONSOLE
 01BF FE20              CPI       ' '       ;CONTROL CHAR?
 01C1 DAE001            JC        INPLC     ;YES, GO PROCESS
 01C4 FE7F              CPI       DEL       ;DELETE CHAR?
 01C6 CAF801            JZ        INPLB     ;YES
 01C9 FE5B              CPI       'Z'+1     ;UPPER CASE?
 01CB DAD001            JC        INPL3     ;NO
 01CE E65F              ANI       5FH       ;MAKE UPPER
 01D0 77       INPL3:   MOV       M,A       ;PUT IN BUFFER
 01D1 3E20              MVI       A,32      ;GET BUFFER SIZE
 01D3 B9                CMP       C         ;TEST IF FULL
 01D4 CABC01            JZ        INPLI     ;YES, LOOP
 01D7 7E                MOV       A,M       ;RECALL CHARACTER
 01D8 23                INX       H         ;INCR POINTER
 01D9 0C                INR       C         ;AND INCR COUNT
 01DA CD0F01   INPLE:   CALL      OUTT      ;ECHO CHARACTER
 01DD C3BC01            JMP       INPLI     ;GET NEXT CHAR
                        ;
                        ; PROCESS CONROL CHARACTER
                        ;
 01E0 FE08     INPLC:   CPI       CTRH      ;^H?
 01E2 CAF801            JZ        INPLB     ;YES
 01E5 FE0D              CPI       CR        ;TEST IF RETURN
 01E7 C2BC01            JNZ       INPLI     ;NO, IGNORE CHAR
                        ;
                        ; END OF INPUT LINE
                        ;
 01EA 79                MOV       A,C       ;LINE COUNT
 01EB 322306            STA       IBUFC     ;SAVE
                        ;
                        ; CARRIAGE RETURN, LINE FEED
 01EE 3E0D     CRLF:    MVI       A,CR
 01F0 CD0F01            CALL      OUTT
 01F3 3E0A              MVI       A,LF
                        ;
                        ; IF NULLS REQUIRED AFTER CR, LF
                        ; USE REPEAT MACRO
                        ;
```

```
                         IF       NNULS > 0  ;ASSEMBLE
                         CALL     OUTT
                         XRA      A          ;GET A NULL
                         REPT     NNULS-1
                         CALL     OUTT
                         ENDM
                         ENDIF               ;NULLS
                  ;
01F5 C30F01              JMP      OUTT
                  ;
                  ; DELETE ANY PRIOR CHARACTER
                  ;
01F8 79           INPLB:  MOV     A,C         ;CHAR COUNT
01F9 B7                   ORA     A           ;ZERO?
01FA CABC01               JZ      INPLI       ;YES
01FD 2B                   DCX     H           ;BACK POINTER
01FE 0D                   DCR     C           ;AND COUNT
01FF 3E08                 MVI     A,CTRH      ;BACK CURSOR
0201 C3DA01               JMP     INPLE       ;PRINT IT
                  ;
                  ; OBTAIN A CHARACTER FROM THE CONSOLE
                  ; BUFFER. SET CARRY IF EMPTY.
                  ;
0204 E5           GETCH:  PUSH    H           ;SAVE REGS
0205 2A2106               LHLD    IBUFP       ;GET POINTER
0208 3A2306       GETC2:  LDA     IBUFC       ;GET COUNT
020B D601                 SUI     1           ;DECR WITH CARRY
020D DA1802               JC      GETC4       ;NO CHARACTERS
0210 322306               STA     IBUFC       ;REPLACE COUNT
0213 7E                   MOV     A,M         ;GET CHARACTER
0214 23           GETC3:  INX     H           ;INCR POINTER
0215 222106               SHLD    IBUFP       ;REPLACE POINTER
0218 E1           GETC4:  POP     H           ;RESTORE REGS
0219 C9                   RET                 ;CARRY IF NO CHAR
                  ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                  ;
                  ; PUNCH A PAPER TAPE
                  ;
021A CD4401       PDUMP:  CALL    READHL      ;START ADDRESS
021D DA6B01               JC      ERROR       ;TOO FEW PARAM
0220 EB                   XCHG
0221 CD4401               CALL    READHL      ;STOP ADDRESS
0224 EB                   XCHG
0225 13                   INX     D
0226 E5                   PUSH    H
0227 CD4401               CALL    READHL      ;AUTOSTART ADDR
022A E3                   XTHL                ;PUT ON STACK
022B CD8502               CALL    LEADR       ;PUNCH LEADER
022E CD8404               CALL    LABEL       ;PUNCH LABEL
                  ;
                  ; START NEW RECORD,   ZERO THE CHECKSUM
                  ; PUNCH CR, LF, 2 NULLS AND COLON
                  ;
0231 CDD002       NEWREC: CALL    PCRLF       ;CR, LF, NULLS
                  ;
                  ; FIND THE RECORD LENGTH
                  ;
```

```
0234 7B              MOV     A,E      ;COMPARE LOW STOP
0235 95              SUB     L        ; TO LOW POINTER
0236 4F              MOV     C,A      ;DIFFERENCE IN C
0237 7A              MOV     A,D      ;COMPARE HIGH STOP
0238 9C              SBB     H        ; TO HIGH POINTER
0239 47              MOV     B,A      ;DIFFERENCE TO B
023A DA6B01          JC      ERROR    ;IMPROPER, H,L > D,E
023D 3E10            MVI     A,RLEN   ;FULL RECORD
023F C24C02          JNZ     NEW2
0242 B9              CMP     C        ;COMPARE TO E-L
0243 DA4C02          JC      NEW2     ;FULL RECORD LENGTH
0246 78              MOV     A,B      ;ARE BOTH E-L AND
0247 B1              ORA     C        ; D-E ZERO?
0248 CA6802          JZ      DONE     ;YES, REC LENGTH = 0
024B 79              MOV     A,C      ;SHORT RECORD
024C 4F     NEW2:    MOV     C,A      ;RECORD LENGTH TO C
024D 0600            MVI     B,0      ;ZERO THE CHECKSUM
024F CD9502          CALL    PNHEX    ;PUNCH RECORD LENGTH
0252 CD9002          CALL    PUNHL    ;PUNCH H/L
0255 AF              XRA     A
0256 CD9502          CALL    PNHEX    ;PUNCH RECORD TYPE 0
0259 7E     PMEM:    MOV     A,M
025A CD9502          CALL    PNHEX    ;PUNCH MEMORY BYTE
025D 23              INX     H        ;INCR. MEMORY POINTER
025E 0D              DCR     C        ;DECR RECORD LENGTH
025F C25902          JNZ     PMEM
0262 CD6703          CALL    CSUM     ;PUNCH CHECKSUM
0265 C33102          JMP     NEWREC   ;NEXT RECORD
           ;
           ; FINISHED, PUNCH LAST RECORD, RECORD
           ; LENGTH 00, THE START ADDRESS,
           ; AND  A RECORD TYPE OF 01
           ;
0268 AF     DONE:    XRA     A
0269 47              MOV     B,A      ;ZERO CHECKSUM
026A CD9502          CALL    PNHEX    ;ZERO RECORD LEN.
026D E1              POP     H
026E CD9002          CALL    PUNHL    ;AUTOSTART H/L
0271 7C              MOV     A,H      ;CHECK FOR
0272 B5              ORA     L        ; AUTOSTART
0273 3E00            MVI     A,0      ;0 WITH CARRY
0275 CA7902          JZ      DON2     ;NO AUTOSTART
0278 3C              INR     A
0279 CD9502  DON2:   CALL    PNHEX    ;RECORD TYPE 1
027C CD6703          CALL    CSUM     ;PUNCH CHECKSUM
027F CD8502          CALL    LEADR    ;PUNCH TRAILER
0282 C38601          JMP     RSTRT    ;NEXT JOB
           ;
           ; PUNCH BLANK HEADER AND TRAILER
           ;
0285 AF     LEADR:   XRA     A
0286 063C            MVI     B,60     ;TAPE NULLS
0288 CDB802  NLDR:   CALL    POUT
028B 05              DCR     B
028C C28802          JNZ     NLDR
028F C9              RET
           ;
```

```
                    ; PUNCH THE H,L REGISTER PAIR
                    ;
0290 7C     PUNHL:   MOV      A,H       ;FETCH H
0291 CD9502          CALL     PNHEX     ;PUNCH IT
0294 7D              MOV      A,L       ;GET L, PUNCH IT
                    ;
                    ; CONVERT A BINARY NUMBER TO TWO HEX
                    ; CHARACTERS, PUNCH THEM, ADD TO CHECKSUM
                    ;
0295 F5     PNHEX:   PUSH     PSW       ;SAVE ON STACK
0296 80              ADD      B         ;ADD TO CHECKSUM,
0297 47              MOV      B,A       ;SAVE IT IN B
0298 F1              POP      PSW       ;RETRIEVE BYTE
0299 F5              PUSH     PSW
029A 1F              RAR
029B 1F              RAR                ;ROTATE UPPER
029C 1F              RAR
029D 1F              RAR                ;TO LOWER
029E CDA202          CALL     PHEX1     ;LEFT CHARACTER
02A1 F1              POP      PSW       ;RIGHT CHARACTER
                    ;
                    ; PUNCH A HEX CHARACTER FROM
                    ; LOWER FOUR BITS
                    ;
02A2 E60F    PHEX1:   ANI      0FH       ;MASK UPPER 4 BITS
02A4 C690            ADI      144
02A6 27              DAA
02A7 CE40            ACI      64
02A9 27              DAA
02AA C3B802          JMP      POUT
                    ;
                    ; INPUT A HEX CHARACTER FROM TAPE
                    ;
02AD CDC402  HEX:     CALL     PIN
02B0 D630            SUI      '0'
02B2 FE0A            CPI      10
02B4 D8              RC                 ;0-9
02B5 D607            SUI      7         ;A-F
02B7 C9              RET
                    ;
                    ; OUTPUT A BYTE TO THE PUNCH
                    ;
02B8 F5     POUT:    PUSH     PSW
02B9 DB06   POUTW:   IN       PSTAT
02BB E680            ANI      POMSK
02BD C2B902          JNZ      POUTW
02C0 F1              POP      PSW
02C1 D307            OUT      PDATA
02C3 C9              RET
                    ;
                    ; INPUT A BYTE FROM PAPER TAPE
                    ;
02C4 DB06   PIN:     IN       PSTAT
02C6 E601            ANI      PIMSK
02C8 C2C472          JNZ      PIN
02CB DB07            IN       PDATA
02CD E67F            ANI      7FH       ;STRIP PARITY
02CF C9              RET
                    ;
```

```
                        ; PUNCH CR, LF, NULLS AND COLON
                        ;
02D0 3E0D       PCRLF:  MVI    A,CR
02D2 CDB802             CALL   POUT
02D5 3E0A               MVI    A,LF
02D7 CDB802             CALL   POUT
02DA AF                 XRA    A
02DB CDB802             CALL   POUT       ;TWO NULLS
02DE CDB802             CALL   POUT
02E1 3E3A               MVI    A,':'      ;COLON
02E3 C3B802             JMP    POUT
                        ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                        ; ENTRY FOR LOAD, EXECUTE AND VERIFY
                        ;
02E6 320006     PLOAD:  STA    TASK
02E9 3E11               MVI    A,17       ;TAPE READER ON
02EB CDB802             CALL   POUT
02EE CD4401             CALL   READHL     ;OFFSET
02F1 220106             SHLD   OFSET      ;SAVE IT
                        ; PROCESS THE RECORD HEADING ON INPUT
                        ;
02F4 CDC402     HEAD:   CALL   PIN        ;INPUT FROM TAPE
02F7 FE3A               CPI    ':'        ;COLON?
02F9 C2F402             JNZ    HEAD       ;NO, TRY AGAIN
02FC 0600               MVI    B,0        ;ZERO THE CHECKSUM
02FE CD3303             CALL   PHEX       ;RECORD LENGTH
0301 B7                 ORA    A          ;IS IT ZERO?
0302 CA4403             JZ     ENDFL      ;YES, DONE
0305 4F                 MOV    C,A        ;SAVE REC. LEN.
0306 CD2B03             CALL   TAPEHL     ;GET H/L
0309 EB                 XCHG              ;ADDR TO D,E
030A 2A0106             LHLD   OFSET      ;GET OFFSET
030D 19                 DAD    D          ;ADD
030E CD3303     LOOP:   CALL   PHEX       ;INPUT DATA BYTE
0311 5F                 MOV    E,A        ;SAVE BYTE
0312 3A0006             LDA    TASK       ;GET TASK
0315 FE56               CPI    'V'        ;SEE IF VERIFYING
0317 7B                 MOV    A,E        ;MOVE BACK
0318 CA1C03             JZ     SKIP       ;JUMP IF VERIFYING
031B 77                 MOV    M,A        ;DATA TO MEMORY
031C BE        SKIP:    CMP    M          ;CHECK MEMORY
031D C27603             JNZ    MERROR     ;BAD MEMORY
0320 23                 INX    H          ;INCREMENT POINTER
0321 0D                 DCR    C          ;DECR RECORD LEN
0322 C20E03             JNZ    LOOP       ;NOT YET ZERO
0325 CD6D03             CALL   CHECK      ;PROCESS CHECKSUM
0328 C3F402             JMP    HEAD       ;START NEXT RECORD
                        ;
                        ; INPUT H,L AND RECORD TYPE FROM TAPE
                        ;
032B CD3303     TAPEHL: CALL   PHEX       ;READ H
032E 67                 MOV    H,A
032F CD3303             CALL   PHEX       ;READ L
0332 6F                 MOV    L,A        ;READ RECORD TYPE
                        ;
                        ; CONVERT 2 CHAR FROM TAPE TO ONE BINARY
                        ; WORD, STORE IN A AND ADD TO CHECKSUM
```

```
                      ;
0333 CDAD02    PHEX:   CALL    HEX         ;UPPER CHARACTER
0336 07                RLC
0337 17                RAL                 ;MOVE TO UPPER
0338 17                RAL
0339 17                RAL                 ;HALF
033A 5F                MOV     E,A         ;SAVE IT
033B CDAD02            CALL    HEX         ;LOWER CHARACTER
033E 83                ADD     E           ;COMBINE BOTH
033F 5F                MOV     E,A         ;SAVE IT
0340 80                ADD     B           ;ADD TO CHECKSUM
0341 47                MOV     B,A         ;SAVE IT
0342 7B                MOV     A,E         ;RETRIEVE DATA
0343 C9                RET
                      ;
                      ; ROUTINE TO CHECK FOR AUTOSTART
                      ;
0344 CD2B03    ENDFL:  CALL    TAPEHL      ;AUTOSTART ADDRESS
                                           ;AND RECORD TYPE
0347 F5                PUSH    PSW         ;SAVE RECORD TYPE
0348 CD3303            CALL    PHEX        ;INPUT CHECKSUM
034B CD6203            CALL    TOFF        ;TAPE READER OFF
034E F1                POP     PSW         ;RETRIEVE REC TYPE
034F FE01              CPI     1           ;AUTOSTART?
0351 C28601            JNZ     RSTRT       ;NO
0354 3A0006            LDA     TASK        ;CHECK TASK
0357 FE45              CPI     'E'         ;EXECUTE?
0359 CAAB01            JZ      JPCHL       ;YES, GO THERE
035C CD1B01            CALL    OUTHL       ;NO, PRINT HL
035F C38601            JMP     RSTRT       ;NEXT TASK
                      ;
                      ; TURN OFF TAPE READER
                      ;
0362 3E13      TOFF:   MVI     A,19
0364 C3B802            JMP     POUT
                      ;
                      ; CALCULATE AND PUNCH THE CHECKSUM
                      ;
0367 78        CSUM:   MOV     A,B         ;CHECKSUM TO A
0368 2F                CMA                 ;ONE'S COMPLEMENT
0369 3C                INR     A           ;TWO'S COMPLEMENT
036A C39502            JMP     PNHEX       ;PUNCH CHECKSUM
                      ;
                      ; SEE IF CHECKSUM IS CORRECT (ZERO)
                      ;
036D CD3303    CHECK:  CALL    PHEX        ;INPUT CHECKSUM
0370 AF                XRA     A
0371 80                ADD     B           ;IS CHECKSUM ZERO?
0372 C8                RZ                  ;YES, RETURN
              ;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;;
                      ;
                      ; ERROR MESSAGES
                      ;
0373 3E43              MVI     A,'C'       ;CHECKSUM ERROR
0375 01                DB      1           ;DB TRICK TO SKIP
0376 3E4D      MERROR:  MVI     A,'M'       ;M FOR BAD MEMORY
0378 F5                PUSH    PSW
0379 CD6203            CALL    TOFF        ;TAPE READER OFF
```

```
037C F1                    POP      PSW
037D CD0F01                CALL     OUTT       ;PRINT ERROR TYPE
0380 CD1B01                CALL     OUTHL      ;PRINT H/L
0383 C38601                JMP      RSTRT
                       ;
0386 0D0A        SIGN:     DB       CR,LF
0388 4865782070           DB       'Hex paper-tape program'
039E 0D0A0A               DB       CR,LF,LF
03A1 45202D206C           DB       'E - load and execute'
03B5 0D0A                 DB       CR,LF
03B7 47202D2067           DB       'G - go to addresses given'
03D0 0D0A                 DB       CR,LF
03D2 52202D2072           DB       'R - read tape into memory'
03EB 0D0A                 DB       CR,LF
03ED 2020202028           DB       '    (with optional offset)'
0407 0D0A                 DB       CR,LF
0409 56202D2076           DB       'V - verify tape against'
0420 206D656D6F           DB       ' memory',CR,LF
0429 57202D2077           DB       'W - write paper tape'
043D 2028616E64           DB       ' (and label)',CR,LF,'    '
044F 2877697468           DB       '(with optional autostart)'
0468 0D0A00               DB       CR,LF,0

046B 0D0A456E74LMESG:     DB       CR,LF,'Enter leader message'
0481 0D0A00               DB       CR,LF,0
                       ;
                       ; PUNCH READABLE LABELS ON PAPER TAPE
                       ;
0484 E5        LABEL:     PUSH     H
0485 D5                   PUSH     D
0486 116B04               LXI      D,LMESG    ;LABEL MESS.
0489 CD7301               CALL     SENDM      ;SEND IT
048C CDAC01               CALL     INPLN      ;GET A LINE
048F CD0402    LABL1:     CALL     GETCH      ;GET CHARACTER
0492 DABF04               JC       LABL2      ;DONE ON CARRY
0495 DE20                 SBI      20H        ;ASCII BIAS
0497 DA8F04               JC       LABL1      ;< SPACE
049A FE3F                 CPI      63
049C D28F04               JNC      LABL1      ;TOO BIG
049F 6F                   MOV      L,A
04A0 5F                   MOV      E,A
04A1 2600                 MVI      H,0
04A3 1600                 MVI      D,0
04A5 29                   DAD      H          ;DOUBLE IT
04A6 29                   DAD      H          ;TIMES 4
04A7 19                   DAD      D          ;TIMES FIVE
04A8 EB                   XCHG
04A9 21C504               LXI      H,TABL
04AC 19                   DAD      D
04AD 0E05                 MVI      C,5
04AF 7E        NEXTC:     MOV      A,M
04B0 CDB802               CALL     POUT
04B3 23                   INX      H
04B4 0D                   DCR      C
04B5 C2AF04               JNZ      NEXTC
04B8 AF                   XRA      A
04B9 CDB802               CALL     POUT
04BC C38F04               JMP      LABL1      ;NEXT CHARACTER
```

```
04BF CD8502    LABL2:  CALL    LEADR
04C2 D1                POP     D
04C3 E1                POP     H
04C4 C9                RET
                ;
04C5 0000000000TABL:   DB      0,   0,   0,   0,   0   ; SPACE
04CA 0000CFCF00        DB      0,   0,   207,207,0     ; EXCL
04CF 0007000700        DB      0,   7,   0,   7,   0   ; "
04D4 28FE28FE28        DB      40,  254,40,  254,40    ; #
04D9 4689FF8972        DB      70,  137,255,137,114    ; $
04DE 462610C8C4        DB      70,  38,  16,  200,196  ; %
04E3 6C92AC40A0        DB      108,146,172,64,  160    ; &
04E8 0004030300        DB      0,   4  ,3,  3,   0     ; '
04ED 003C428100        DB      0,   60,  66,129,  0    ; (
04F2 0081423C00        DB      0,   129,66,  60,  0    ; )
04F7 8850F85088        DB      136,80,  248,80,  136   ; *
04FC 08087E0808        DB      8,   8,   126,8,   8    ; +
0501 0080703000        DB      0,   128,112,48,  0     ; ,
0506 0808080808        DB      8,   8,   8,   8,   8   ; -
050B 00C0C00000        DB      0,   192,192,0,   0     ; .
0510 4020100804        DB      64,  32,  16,  8,   4   ; /
0515 7EA189857E        DB      126,161,137,133,126     ; 0
051A 8482FF8080        DB      132,130,255,128,128     ; 1
051F C2A1918986        DB      194,161,145,137,134     ; 2
0524 4289898976        DB      66,  137,137,137,118    ; 3
0529 0C0A89FF88        DB      12,  10,137,255,136      ; 4
052E 6789898971        DB      103,137,137,137,113     ; 5
0533 7E89898972        DB      126,137,137,137,114     ; 6
0538 0101F90503        DB      1,   1,   249,5,   3    ; 7
053D 7689898976        DB      118,137,137,137,118     ; 8
0542 468989897E        DB      70,  137,137,137,126    ; 9
0547 00D8D80000        DB      0,   216,216,0,   0     ; :
054C 00807636300        DB      0,   128,118,54,  0    ; ;
0551 1028448200        DB      16,  40,  68,  130,0    ; <
0556 2828282828        DB      40,  40,  40,  40,  40  ; =
055B 8244281000        DB      130,68,  40,  16,  0    ; >
0560 0601B90906        DB      6,   1,   185,9,   6    ; ?
0565 7E819D910E        DB      126,129,157,145,14      ;
056A FE090909FE        DB      254,9,   9,   9,   254  ; A
056F 81FF898976        DB      129,255,137,137,118     ; B
0574 7E81818142        DB      126,129,129,129,  66    ; C
0579 81FF81817E        DB      129,255,129,129,126     ; D
057E FF89898989        DB      255,137,137,137,137     ; E
0583 FF09090901        DB      255,9,   9  ,9  ,1      ; F
0588 7E81919172        DB      126,129,145,145,114     ; G
058D FF080808FF        DB      255,8,   8,   8,   255  ; H
0592 0081FF8100        DB      0,   129,255,129,0      ; I
0597 6080817F01        DB      96,  128,129,127,1      ; J
059C FF081422C1        DB      255,8,   20,  34,  193  ; K
05A1 FF80808080        DB      255,128,128,128,128     ; L
05A6 FF020C02FF        DB      255,2,   12,  2,   255  ; M
05AB FF023C40FF        DB      255,2,   60,  64,   255 ; N
05B0 FF818181FF        DB      255,129,129,129,255     ; O
05B5 0509090906        DB      5,   9,   9,   9,   6   ; P
05BA 7E81A141BE        DB      126,129,161,65,  190    ; Q
05BF FF19294986        DB      255,25,  41,  73,  134  ; R
05C4 4689898972        DB      70,  137,137,137,114    ; S
05C9 0101FF0101        DB      1,   1,   255,1,   1    ; T
```

```
05CE  7F8080807F          DB      127,128,128,128,127  ; U
05D3  0F30C0300F          DB      15, 48, 192,48, 15    ; V
05D8  7F8070807F          DB      127,128,112,128,127  ; W
05DD  C3241824C3          DB      195,36, 24, 36, 195  ; X
05E2  0304F80403          DB      3,  4,  248,4  ,3     ; Y
05E7  C1A1918987          DB      193,161,145,137,135  ; Z
05EC  00FF818181          DB      0,  255,129,129,129  ; [
05F1  0408102040          DB      4,  8,  16, 32, 64   ; \
05F6  818181FF00          DB      129,129,129,255,0    ; ]
05FB  0C0201020C          DB      12, 2,  1,  2,  12   ; ^

0600              TASK:   DS      1               ;SAVE IT
0601  0000        OFSET:  DW      0               ;LOAD OFFSET
0603                      DS      30              ;STACK SPACE
                  STACK:
0621              IBUFP:  DS      2               ;BUFFER POINTER
0623              IBUFC:  DS      1               ;BUFFER COUNT
0624              IBUFF:  DS      20              ;INPUT BUFFER
                  ;
0638                      END
```

Symbols:

0011	CDATA	036D	CHECK	0001	CIMSK	0002	COMSK
017D	CONTIN	000D	CR	01EE	CRLF	0010	CSTAT
0367	CSUM	0008	CTRH	007F	DEL	0279	DON2
0268	DONE	0344	ENDFL	016B	ERROR	0208	GETC2
0214	GETC3	0218	GETC4	0204	GETCH	02F4	HEAD
0129	HEX1	02AD	HEX	0623	IBUFC	0624	IBUFF
0621	IBUFP	01B4	INPL2	01D0	INPL3	01F8	INPLB
01E0	INPLC	01DA	INPLE	01BC	INPLI	01AC	INPLN
0103	INPUTT	01AB	JPCHL	0484	LABEL	048F	LABL1
04BF	LABL2	0285	LEADR	000A	LF	046B	LMESG
030E	LOOP	0376	MERROR	024C	NEW2	0231	NEWREC
04AF	NEXTC	0134	NIB	0288	NLDR	0000	NNULS
0601	OFSET	011B	OUTHL	0120	OUTHX	010F	OUTT
0110	OUTW	02D0	PCRLF	0007	PDATA	021A	PDUMP
02A2	PHEX1	0333	PHEX	0001	PIMSK	02C4	PIN
02E6	PLOAD	0259	PMEM	0295	PNHEX	0080	POMSK
02B8	POUT	02B9	POUTW	0006	PSTAT	0290	PUNHL
0149	RDHL2	015E	RDHL4	0168	RDHL5	0144	READHL
0010	RLEN	0186	RSTRT	0173	SENDM	0386	SIGN
031C	SKIP	0621	STACK	0100	START	04C5	TABL
032B	TAPEHL	0600	TASK	0362	TOFF		

This program generates tapes with a modified Intel format. A typical record is shown in Figure 9.1.


```
                ┌────────── record header (colon
                │    ┌────────── record length (2 characters)
                │    │   ┌────────── address (4 characters)
                │    │   │   ┌────────── record type 00 or 01
                │    │   │   │     ┌──── data bytes ────┐  ┌── checksum (2 characters)
                │    │   │   │     │                    │  │
 :10010000C37D01DB10E601CA0301DB11E67FC9F5FF
```
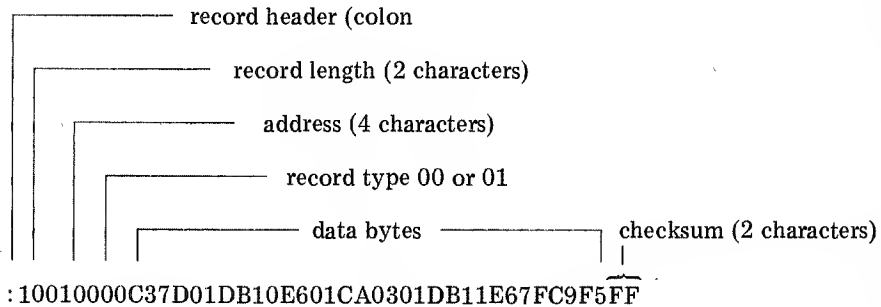
Figure 9.1. The hex tape format.

In this example, the record length is 10 hex, the address is 100 hex, the record type is 00, the first data byte is C3, the last data byte is F5 hex, and the checksum is FF hex. This is the format used by the CP/M assemblers ASM and MAC to generate HEX files.

Each record starts with a colon and is followed by the hex-encoded data. Since the data are encoded in ASCII, two bytes on the tape are needed to represent each original byte. Two hex characters, representing the record length, follow the header character. This hex value gives the actual number of data bytes contained in the record. It does not include the other characters in the record which designate the record address, the record type, and the checksum. A zero value for the record length is used for the last record to indicate the end of the file.

The record address, the address of the first byte in the record, comes next. This address is encoded into four hex characters, high-order byte first. The next item is the record type; it consists of two characters and can be 00 or 01. The value is usually 00, however; 01 is used for the end-of-file record for autostart tapes.

The data from memory are encoded next. Two bytes on the tape represent each data byte. The checksum byte is the last item in the record. It is formed by taking the two's complement of the sum of all the previous bytes in the record (in binary form). A carriage return, line feed, and optional nulls follow the checksum.

When the hex tape is loaded into the computer, the bytes within each record including the checksum are added together. The checksum byte is formed from the two's complement of the original sum. Since the sum of a number and its two's complement is zero, the total at this point should be zero. A nonzero result indicates an error.

The last record in the file has a record length of zero. This end-of-file record can indicate an autostart address in place of the usual record address. The computer can branch to this autostart address after the program is loaded. The record type in this case is 01—the end-of-file record.

Since the tape is written with an ASCII-encoded format, it is easy to read. Listing 9.2 shows the first part of the monitor made with the monitor itself.

Listing 9.2 A hex dump of the beginning of the monitor.

```
:10010000C37D01DB10E601CA0301DB11E67FC9F5FF
:10011000DB10E602CA1001F1D311C94CCD20014D0C
:10012000791F1F1F1FCD290179E60FC69027CE40EA
:1001300027C30F01D630D8FE173FD8FE0A3FD0D6CE
```

The disadvantage of this format is that the tape takes twice as long to make and twice as long to read as a corresponding binary tape. A BASIC interpreter that loads in 20 minutes from a binary format would take 40 minutes to load from hex format.

You may want to reassemble the hex tape routine for some other memory location, or you may want to incorporate it into your system monitor. But wait until you've learned about the binary tape monitor shown later in this chapter before you do.

Type in the hex program, assemble it, and start it up by branching to the beginning. A list of commands will be printed as a guide to operation.

Hex paper-tape program:

E   load and execute
G   go to address given
R   read tape into memory (with optional offset)
V   verify tape against memory
W   write and label paper tape (with optional autostart)

Console input is buffered just as it is in our system monitor. In fact, you will notice that many of the monitor I/O routines have been duplicated in this tape program. To create a tape, type the letter W (for write), the start address, and an optional autostart address. Finish the line with a carriage return. Typing errors can be corrected as usual with a DEL or backspace key. When the statement "Enter leader message" appears, either type the characters that you want on the tape leader, or just type a carriage return to skip the title.

After the tape has been made, it should be verified. Type the letter V and a carriage return. If you have a Teletype with an automatic tape reader, the computer can turn it on at the beginning and turn it off at the end. This is accomplished by sending a control-Q at the beginning and a control-S at the end. Each entry on the tape will be compared to the corresponding value in memory. If a checksum or verify error is detected, the process will be terminated. The appropriate error message and the address of the error will appear. In the case of a checksum error, the address is not meaningful.

A tape can be loaded into memory by typing the letter R (for read) and the optional offset value. This offset is added to the record address, after the record address has been added into the checksum. An offset of 1000 hex will

load a program 4K bytes higher than the regular address. An offset of F000 hex will load the program 4K bytes lower. If you want, the computer will branch to the autostart address after the tape has been loaded; simply type an E (for execute) rather than an R.

If a leader message has been punched on the tape, it is not necessary to position the tape past this message. The loader routine is looking for a colon to indicate the start of a record. But the colon symbol will never appear in the label itself. There is a GO command so that you can easily leave the tape program. Type the letter G (GO) and the address.

A TAPE-LABELING ROUTINE

The assembly language instructions that punch readable labels on paper tape begin at LABEL and continue on down to TABL. The data used by this portion starts at TABL and goes down to TASK. The characters that are available include the complete set of ASCII characters from the blank (20 hex) through the underline (5F hex). The uppercase letters are included but the lowercase letters are not. One line of data in the source program is used for each character punched on the tape. The characters can be identified by the comment at the end of the line. The lines of data are arranged in sequence corresponding to the ASCII character set. The characters punched on the tape are generated in a five-by-eight matrix, with a row of blanks between the characters.

When the label subroutine is called, it first prints a message requesting input. In response, the user enters one line of characters and concludes the line with a carriage return. The message is then punched on the tape. Each ASCII character is obtained from the console input buffer as needed. The ASCII character is converted to binary by subtraction of an ASCII blank. The result is then used as a pointer to find the corresponding entry in the table. This is done by multiplying the binary value by 5 and adding it to the table address. The next five bytes of the table are then sent to the punch. The complete set of characters is shown in Figure 9.2.
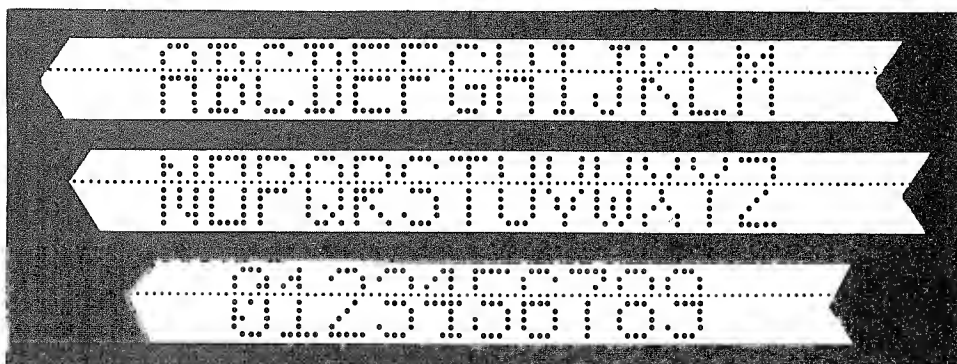
Figure 9.2.   The set of letters and numbers produced by HEXMON.

The label subroutine with its necessary I/O routines can be removed from the tape program and used separately. It can be placed into high memory and called by another program such as a BASIC interpreter.

A BINARY TAPE MONITOR

The hexadecimal program given in the previous section is useful for paper tape. But a binary tape routine is much more suitable for magnetic tape. With a magnetic tape format, the tape cannot be visually inspected. Therefore, there is no advantage in coding the data in hexadecimal format.

Files are organized into records just as they are with the hex program. Each record starts with a record header, then continues with the record length, the address, the data, and the checksum. But the binary format is a bit different. As shown in Figure 9.3, there are three types of records: a header record, a data record, and an end-of-file record. The first record in the file is the file-header record. It begins with a 55-hex character. An optional filename appears next. The record header ends with a carriage-return character.

Header Record	55H	Filename		Carriage Return	
Data Record	3CH	Rec. Len.	Addr.	Data	Checksum
EOF Record	74H	Autostart Addr.		Checksum	

Figure 9.3. Three different record types are used with the binary tape format: A header record, one or more data records, and an end-of-file record.

The data record follows the header record. It starts with a 3C-hex header byte, a record-length byte, and two bytes giving the record address. The record address is written with the low-order byte first. The data bytes appear next, and then the checksum concludes the record.

With this format, the checksum byte consists of the sum of the data record bytes rather than the two's complement of the sum as used with the hex format. This checksum includes the record address and the data bytes, but it does not include the record length. The record length is not needed, since an incorrectly read record length will point to an incorrect byte that is to be used for the checksum.

The end-of-file record is four bytes long. It begins with a 74-hex character. It is followed by the autostart address, written as low byte, high byte. The fourth byte in this record is the checksum of the two-byte autostart address.

The routine given in Listing 9.3 is not a complete program. It is meant to be added to the end of the system monitor developed in Chapter 6. The

I/O and conversion routines of the monitor are used whenever possible. If you want to use it as a stand-alone program, you will have to include the necessary I/O routines. The addition of the tape program to the monitor will increase its size to one-and-a-half K bytes.

Add the new instructions to the end of the monitor, then change the monitor command-branch table for the letter T (tape)

```
DW      TAPE    ;T
```

so that a command line starting with the letter T will cause a branch to the new tape routines.

```
             Listing 9.3. Binary tape routines.

                    ; LOCATIONS IN THE STACK AREA
                    ;
57C6 =              FBUF    EQU     IBUFF+32 ;FILENAME BUFF
57E6 =              OFSET   EQU     FBUF+20H ;LOAD OFFSET
57E8 =              TASK    EQU     OFSET+2
57E9 =              LFLAG   EQU     TASK+1   ;LOAD-ERROR FLAG
                    ;
0055 =              SBYTE   EQU     55H      ;SYNC BYTE
003C =              RHEAD   EQU     3CH      ;RECORD HEADER
0074 =              EOF     EQU     74H      ;END OF FILE
                    ;
0006 =              PSTAT   EQU     6        ;PUNCH STATUS
0007 =              PDATA   EQU     PSTAT+1  ;PUNCH DATA
0001 =              PIMSK   EQU     1        ;INPUT MASK
0080 =              POMSK   EQU     80H      ;OUTPUT MASK
                    ;
                    ;
5BFA 210000  TAPE:  LXI     H,0
5BFD 22E657         SHLD    OFSET    ;ZERO OFFSET
5C00 CD2559         CALL    GETCH    ;COMMAND
                    ;
                    ; TAPE-COMMAND PROCESSOR
                    ;
5C03 FE45           CPI     'E'
5C05 CAD25C         JZ      TLOAD    ;LOAD AND EXEC
5C08 FE4C           CPI     'L'
5C0A CAD25C         JZ      TLOAD    ;LOAD
5C0D FE4D           CPI     'M'
5C0F CA805D         JZ      TMAKE    ;MAKE TEST TAPE
5C12 FE4F           CPI     'O'
5C14 CACA5C         JZ      OFFST    ;OFFSET LOAD
5C17 FE54           CPI     'T'
5C19 CA9A5D         JZ      TTEST    ;TAPE TEST
5C1C FE56           CPI     'V'
5C1E CAD25C         JZ      TLOAD    ;VERIFY TAPE/MEM
5C21 FE44           CPI     'D'      ;DUMP TO TAPE
5C23 C2D459         JNZ     ERROR
                    ;
```

```
                       ; DUMP MEMORY TO TAPE IN 8-BIT BINARY FORMAT
                       ;
     5C26 CD8659             CALL    RDHLDE   ;ADDRESS LIMITS
     5C29 E5                 PUSH    H        ;START ADDR
     5C2A CD9D59             CALL    READHL   ;AUTOSTART
     5C2D E3                 XTHL             ;SWITCH WITH H,L
     5C2E CD885C             CALL    LEADR    ;TAPE LEADER
     5C31 3E55               MVI     A,SBYTE  ;SYNC BYTE
     5C33 CD935C             CALL    TOUT
     5C36 CD2559     TDMP:   CALL    GETCH    ;FILE-NAME CHAR
     5C39 DA425C             JC      PD4      ;FILENAME END
     5C3C CD935C             CALL    TOUT     ;SEND TO TAPE
     5C3F C3365C             JMP     TDMP     ;NEXT CHAR
     5C42 3E0D       PD4:    MVI     A,CR
     5C44 CD935C             CALL    TOUT     ;PUT CR ON TAPE
     5C47 3E3C       PD0:    MVI     A,RHEAD  ;RECORD HEADER
     5C49 CD935C             CALL    TOUT     ;PUT ON TAPE
     5C4C 7B                 MOV     A,E
     5C4D 95                 SUB     L
     5C4E 3C                 INR     A        ;RECORD LENGTH
     5C4F 4F                 MOV     C,A
     5C50 CD935C             CALL    TOUT     ;PUT ON TAPE
     5C53 7D                 MOV     A,L
     5C54 CD935C             CALL    TOUT     ;L TO TAPE
     5C57 45                 MOV     B,L      ;START CHECKSUM
     5C58 7C                 MOV     A,H
     5C59 CD935C             CALL    TOUT     ;H TO TAPE
     5C5C 7E       PD1:      MOV     A,M      ;GET DATA
     5C5D CD935C             CALL    TOUT     ;SEND TO TAPE
     5C60 0D                 DCR     C        ;RECORD COUNT
     5C61 CA685C             JZ      PD2      ;DONE
     5C64 23                 INX     H        ;BUMP POINTER
     5C65 C35C5C             JMP     PD1      ;NEXT BYTE
                       ;
                       ; END OF RECORD
                       ;
     5C68 78         PD2:    MOV     A,B      ;GET CHECKSUM
     5C69 CD935C             CALL    TOUT     ;SEND IT
     5C6C 7C                 MOV     A,H
     5C6D BA                 CMP     D        ;END OF FILE?
     5C6E CA755C             JZ      PD3      ;YES
     5C71 23                 INX     H
     5C72 C3475C             JMP     PD0      ;NEXT RECORD
                       ;
                       ; END OF FILE
                       ;
     5C75 3E74       PD3:    MVI     A,EOF
     5C77 CD935C             CALL    TOUT     ;SEND IT
     5C7A E1                 POP     H        ;AUTOSTART ADDR
     5C7B 7D                 MOV     A,L      ;LOW
     5C7C CD935C             CALL    TOUT     ;SEND IT
     5C7F 45                 MOV     B,L      ;START CHECKSUM
     5C80 7C                 MOV     A,H      ;HIGH
     5C81 CD935C             CALL    TOUT     ;SEND IT
     5C84 78                 MOV     A,B      ;CHECKSUM
     5C85 CD935C             CALL    TOUT     ;SEND IT
```

```
                    ;
                    ; MAKE A LEADER/TRAILER ON TAPE
                    ;
5C88 AF             LEADR:  XRA     A       ;GET A NULL
5C89 0648                   MVI     B,72    ;# OF NULLS
5C8B CD935C         NLDR:   CALL    TOUT    ;SEND NULL
5C8E 05                     DCR     B
5C8F C28B5C                 JNZ     NLDR
5C92 C9                     RET
                    ;
                    ; OUTPUT BYTE TO TAPE, ADD TO CHECKSUM
                    ;
5C93 F5             TOUT:   PUSH    PSW
5C94 80                     ADD     B       ;TO CHECKSUM
5C95 47                     MOV     B,A     ;PUT BACK
5C96 F1                     POP     PSW
5C97 F5             POUT:   PUSH    PSW
5C98 DB06           POUTW:  IN      PSTAT   ;STATUS
5C9A E680                   ANI     POMSK
                    ;
                    ; NEXT LINE MAY NEED TO BE JZ POUTW
5C9C C2985C                 JNZ     POUTW   ;NOT READY
5C9F F1                     POP     PSW
5CA0 D307                   OUT     PDATA   ;SEND BYTE
5CA2 C9                     RET
                    ;
                    ; INPUT BYTE FROM TAPE
                    ; ADD TO CHECKSUM
                    ;
5CA3 CDB25C         TIN4:   CALL    PIN     ;GET BYTE
5CA6 F5                     PUSH    PSW
5CA7 80                     ADD     B       ;ADD TO CHECKSUM
5CA8 47                     MOV     B,A     ;PUT BACK
5CA9 F1                     POP     PSW
                    ;
                    ; SEND TO CONSOLE IF NOT A CONROL CHARACTER
                    ;
5CAA E67F                   ANI     7FH
5CAC FE20                   CPI     ' '
5CAE D8                     RC              ;CONTROL
5CAF D311                   OUT     CDATA
5CB1 C9                     RET
                    ;
5CB2 DB06           PIN:    IN      PSTAT   ;STATUS
5CB4 E601                   ANI     PIMSK
                    ;
                    ; NEXT LINE MAY NEED TO BE JZ  PIN
5CB6 C2B25C                 JNZ     PIN     ;NOT READY
5CB9 DB07                   IN      PDATA   ;GET BYTE
5CBB C9                     RET             ;KEEP 8 BITS
                    ;
                    ; LOOK FOR HEADER ON PAPER TAPE
                    ;
```

```
5CBC 3E11        PIN4:    MVI     A,CTRQ   ;^Q
5CBE CD975C               CALL    POUT     ;TURN ON READER
5CC1 CDB25C      PIN5:    CALL    PIN      ;GET BYTE
5CC4 FE55                 CPI     SBYTE    ;SYNC BYTE?
5CC6 C2C15C               JNZ     PIN5     ;NO, TRY AGAIN
5CC9 C9                   RET
                 ;
                 ; LOAD A TAPE WITH 16-BIT OFFEST
                 ;
5CCA 57          OFFST:   MOV     D,A      ;SAVE TASK
5CCB CD9D59               CALL    READHL   ;GET OFFSET
5CCE 22E657               SHLD    OFSET    ;SAVE IT
5CD1 7A                   MOV     A,D      ;RESTORE TASK
                 ;
                 ; LOAD/ VERIFY BINARY TAPE
                 ;
5CD2 32E857      TLOAD:   STA     TASK     ;SAVE COMMAND
5CD5 21C657               LXI     H,FBUF   ;FILENAME BUFFER
5CD8 AF                   XRA     A        ;GET A ZERO
5CD9 32E957               STA     LFLAG    ;RESET FLAG
5CDC CD2559      TLD1:    CALL    GETCH    ;READ FILENAME
5CDF DAE75C               JC      TLD5     ;END OF FILENAME
5CE2 77                   MOV     M,A      ;PUT IN FBUF
5CE3 23                   INX     H
5CE4 C3DC5C               JMP     TLD1     ;NEXT CHARACTER
5CE7 3E0D        TLD5:    MVI     A,CR
5CE9 32A657               STA     IBUFF
5CEC CDBC5C               CALL    PIN4     ;FIND HEADER
5CEF 21C657               LXI     H,FBUF   ;FILENAME BUFFER
5CF2 7E                   MOV     A,M      ;1ST CHARACTER
5CF3 FE0D                 CPI     CR
5CF5 CA1C5D               JZ      TL0      ;NO FILENAME
5CF8 11A657               LXI     D,IBUFF  ;INPUT BUFFER
                 ;
                 ; INPUT FILENAME FROM TAPE, PUT IN IBUF
                 ;
5CFB CDA35C      TLD2:    CALL    TIN4     ;BYTE FROM TAPE
5CFE 12                   STAX    D        ;PUT IN IBUFF
5CFF 13                   INX     D
5D00 FE0D                 CPI     CR
5D02 CA125D               JZ      TLD4     ;NO FILENEME
5D05 BE                   CMP     M        ;COMP FILENAMES
5D06 23                   INX     H
5D07 CAFB5C               JZ      TLD2     ;NEXT CHARACTER
                 ;
                 ; FILENAME ENTERED FROM CONSOLE
                 ; DOESN'T MATCH NAME ON TAPE
                 ;
5D0A 3E46                 MVI     A,'F'    ;SET ERROR FLAG
5D0C 32E957               STA     LFLAG
5D0F C3FB5C               JMP     TLD2
5D12 AF          TLD4:    XRA     A
5D13 1B                   DCX     D
5D14 12                   STAX    D
5D15 3AE957               LDA     LFLAG    ;CHECK FLAG
5D18 B7                   ORA     A        ;ZERO?
5D19 C2C05D               JNZ     FNERR    ;FILENAME ERROR
```

```
5D1C  CDA35C    TL0:     CALL     TIN4     ;BYTE FROM TAPE
5D1F  FE74               CPI      EOF
5D21  CA605D             JZ       EXEC     ;DONE
5D24  FE3C               CPI      RHEAD    ;RECORD HEADER
5D26  C21C5D             JNZ      TL0      ;TRY AGAIN
5D29  CDA35C             CALL     TIN4     ;RECORD LENGTH
5D2C  4F                 MOV      C,A      ;PUT IN C
5D2D  CDA35C             CALL     TIN4     ;ADDR, LOW BYTE
5D30  5F                 MOV      E,A      ;INTO E
5D31  47                 MOV      B,A      ;PUT IN CHECKSUM
5D32  CDA35C             CALL     TIN4     ;ADDR, HIGH BYTE
5D35  57                 MOV      D,A      ;INTO D
5D36  2AE657             LHLD     OFSET    ;GET LOAD OFFSET
5D39  19                 DAD      D        ;ADD TO ADDRESS
5D3A  3AE857             LDA      TASK     ;GET TASK
5D3D  57                 MOV      D,A      ;PUT IN D
5D3E  CDA35C    TL1:     CALL     TIN4     ;DATA BYTE
5D41  5F                 MOV      E,A      ;SAVE IN E
5D42  7A                 MOV      A,D      ;CHECK THE TASK
5D43  FE56               CPI      'V'      ;VERIFYING?
5D45  7B                 MOV      A,E      ;GET BYTE AGAIN
5D46  CA4A5D             JZ       SKIP     ;VERIFYING, SKIP
5D49  77                 MOV      M,A      ;INTO MEMORY
5D4A  BE        SKIP:    CMP      M        ;IS IT THERE?
5D4B  C2AE5D             JNZ      PERROR   ;NO
5D4E  23                 INX      H        ;INCR ADDRESS
5D4F  0D                 DCR      C        ;RECORD COUNT
5D50  C23E5D             JNZ      TL1      ;NEXT BYTE
          ;
          ; END OF RECORD, GET CHECKSUM
          ;
5D53  48                 MOV      C,B      ;CHECKSUM TO C
5D54  CDA35C             CALL     TIN4     ;TAPE CHECKSUM
5D57  B9                 CMP      C        ;THE SAME?
5D58  CA1C5D             JZ       TL0      ;YES
5D5B  3E43      CSERR:   MVI      A,'C'    ;ERROR
5D5D  C3455A             JMP      ERR2
          ;
          ; END OF TAPE, GET AUTOSTART ADDRESS
          ; SEE IF EXECUTING
          ;
5D60  CDA35C    EXEC:    CALL     TIN4     ;START, LOW
5D63  6F                 MOV      L,A      ;PUT IN L
5D64  47                 MOV      B,A      ;START CHECKSUM
5D65  CDA35C             CALL     TIN4     ;START, HIGH
5D68  67                 MOV      H,A      ;PUT IN H
5D69  48                 MOV      C,B      ;GET SUM
5D6A  CDA35C             CALL     TIN4     ;READ CHECKSUM
5D6D  B9                 CMP      C        ;SAME
5D6E  C25B5D             JNZ      CSERR    ;NO
5D71  CDB45D             CALL     POFF     ;READER OFF
5D74  7A                 MOV      A,D      ;CHECK TASK
5D75  FE45               CPI      'E'      ;EXECUTING?
5D77  CA7F5D             JZ       PCHLT    ;YES
5D7A  3E45               MVI      A,'E'    ;EXEC ADDRESS
5D7C  C3455A             JMP      ERR2
```

```
                    ;
                    ; THE NEXT LABEL CAN BE PLACED AFTER
                    ; THE LABEL CALLS/GO NEAR THE BEGINNING
                    ;
5D7F E9             PCHLT:  PCHL
                    ;
                    ; MAKE BINARY TEST TAPE, EACH BYTE
                    ; IS ONE LARGER THAN PREVIOUS BYTE
                    ; WITH OVERFLOW, 00 IS AFTER FF
                    ;
5D80 21F401         TMAKE:  LXI     H,500   ;ABORT CHECK
5D83 7A             TMAK2:  MOV     A,D     ;GET A BYTE
5D84 CD935C                 CALL    TOUT    ;SEND TO TAPE
5D87 14                     INR     D       ;INCREMENT IT
5D88 2B                     DCX     H       ;DECR COUNT
5D89 7C                     MOV     A,H
5D8A B5                     ORA     L       ;SEE IF ZERO
5D8B C2835D                 JNZ     TMAK2   ;NO
5D8E CD2558                 CALL    INSTAT  ;TERMINATION?
5D91 CA805D                 JZ      TMAKE   ;NO
5D94 CD1558                 CALL    INPUTT  ;^X FOR ABORT
5D97 C3805D                 JMP     TMAKE   ;NO
                    ;
                    ; READ BINARY TEST TAPE
                    ; EACH BYTE MUST BE ONE LARGER
                    ; THAN THE PREVIOUS ONE
                    ;
5D9A CDB25C         TTEST:  CALL    PIN     ;GET A BYTE
5D9D 57                     MOV     D,A     ;SAVE IT
5D9E CDB25C         TTEST2: CALL    PIN     ;NEXT BYTE
5DA1 14                     INR     D       ;INCR FIRST
5DA2 BA                     CMP     D       ;SAME?
5DA3 CA9E5D                 JZ      TTEST2  ;YES
5DA6 3E43                   MVI     A,'C'   ;NO
5DA8 CD2A58                 CALL    OUTT    ;C FOR ERROR
5DAB C39A5D                 JMP     TTEST   ;START AGAIN
                    ;
                    ; TAPE ERROR, PRINT B AND ADDRESS
                    ;
5DAE CDB45D         PERROR: CALL    POFF
5DB1 C3435A                 JMP     ERRB
                    ;
                    ; TURN OFF TAPE READER
                    ;
5DB4 3E13           POFF:   MVI     A,CTRS  ;READER OFF
5DB6 C3935C                 JMP     TOUT
                    ;
                    ; FILENAME ERROR, PRINT ACTUAL
                    ; FILENAME ON TAPE
                    ;
5DB9 205472793AEMESS:  DB      ' Try: ',0
5DC0 CDB45D         FNERR:  CALL    POFF    ;READER ON
5DC3 11B95D                 LXI     D,EMESS ;ERROR MESSAGE
5DC6 CD3B59                 CALL    SENDM   ;SEND IT
5DC9 11A657                 LXI     D,IBUFF ;FILE NAME
5DCC C33B59                 JMP     SENDM   ;SEND IT TOO
                    ;
5DCF                        END
```

Symbols:

5B07 ADMP2	5B23 ADMP3	5B26 ADMP4	5B04 ADUMP
5AED ALOD2	FFF7 APOS	5AD5 ASCII	5B2C ASCS
0008 BACKUP	5B4C BIT2	5B4A BITS	5A09 CALLS
0011 CDATA	0011 CDATA0	5A3E CHEKM	5809 CIN
5858 COLD	5806 COUT	000D CR	59DC CRHL
590F CRLF	5D5B CSERR	0010 CSTAT	0010 CSTAT0
0008 CTRH	0011 CTRQ	0013 CTRS	0018 CTRX
007F DEL	5945 DUMP	5948 DUMP2	594B DUMP3
595E DUMP4	5967 DUMP5	5DB9 EMESS	0074 EOF
5A45 ERR2	5A43 ERRB	59D4 ERROR	5A42 ERRP
001B ESC	5D60 EXEC	57C6 FBUF	5A5D FILL
5A66 FILL2	5A6C FILL3	5A75 FILL4	5DC0 FNERR
580F GCHAR	5939 GETC4	5925 GETCH	5A08 GO
59F5 HEX1	5991 HHLDE	5A7C HLDEBC	5A8A HLDECK
5B73 HMATH	57A5 IBUFC	57A6 IBUFF	57A3 IBUFP
00DB INC	580C INLN	0001 INMSK	58D5 INPL2
58F1 INPL3	5919 INPLB	5901 INPLC	58FB INPLE
58DD INPLI	58D0 INPLN	581B INPUT2	5815 INPUTT
5825 INSTAT	5B3D IPORT	5BA5 JERR	5B85 JUST
5B89 JUST2	5B92 JUST3	5C88 LEADR	000A LF
57E9 LFLAG	5A0D LOAD	5A10 LOAD2	5A33 LOAD3
5A30 LOAD4	5A37 LOAD6	5A96 MOVDN	5A93 MOVE
5AA0 MOVIN	5878 MSIZE	59C4 NIB	5C8B NLDR
586A NPAGE	5CCA OFFST	57E6 OFSET	0002 OMSK
5B5A OPORT	5800 ORGIN	582B OUT2	5839 OUT3
5844 OUT4	00D3 OUTC	5812 OUTH	59E4 OUTHEX
59DF OUTHL	59EC OUTHX	59E3 OUTLL	59E7 OUTSP
582A OUTT	5981 PASC2	5983 PASC3	5976 PASCI
5D7F PCHLT	5C47 PD0	5C5C PD1	5C68 PD2
5C75 PD3	5C42 PD4	0007 PDATA	5DAE PERROR
0001 PIMSK	5CB2 PIN	5CBC PIN4	5CC1 PIN5
5DB4 POFF	0080 POMSK	57A0 PORTN	5C97 POUT
5C98 POUTW	0006 PSTAT	5B63 PUTIO	59A2 RDHL2
59B7 RDHL4	59C1 RDHL5	5989 RDHLD2	5986 RDHLDE
599D READHL	5A4E REGS	5BB4 REPL	5BC1 REPL2
5BCC REPL3	0055 SBYTE	5AAD SEAR2	5AB8 SEAR3	5ACF SEAR4
5AC9 SEAR5	5AAA SEARCH	593B SENDM	584F SIGNON
5D4A SKIP	57A0 STACK	5800 START	0009 TAB
589C TABLE	5BFA TAPE	57E8 TASK	5C36 TDMP
5CA3 TIN4	5D1C TL0	5D3E TL1	5CDC TLD1
5CFB TLD2	5D12 TLD4	5CE7 TLD5	5CD2 TLOAD
5D83 TMAK2	5D80 TMAKE	0018 TOP	5C93 TOUT
5A00 TSTOP	5D9A TTEST	5D9E TTEST2	5BD2 VERM
5BD5 VERM2	5BF3 VERM3	3831 VERS	5861 WARM
5A55 ZERO			

There are seven tape commands that can be given. The appropriate command letter must immediately follow the letter T. The first thing that should be done is to make a test tape. In fact, the test pattern should be recorded onto the beginning of each tape you own. Give the command

```
>TM
```

(tape make), and start recording. The computer will send a sequence of bytes, each being one larger than the previous one. When the maximum value of FF hex has been sent, the next byte will be a zero. Record the pattern for 15 to 30 seconds. Type a control-X to end the procedure.

The integrity of the whole tape-recording system can now be tested. Rewind the test section of the tape and play it back. Type a command of

```
>TT
```

(tape test). The computer will read a byte from the tape, increment the value, then read another byte. If the two values don't agree, then a letter C will be printed on the console. The process will then be repeated until you terminate it.

If the two values do agree, then the computer will increment the first byte again, read another byte, and compare the two. This process will be repeated over and over. Each byte on the tape will be compared to see that it is exactly one larger than the previous byte. If you can go through a one-hour cassette recording without a single error, then you have a reliable system.

You may have an adjustment on the A/D converter circuit that allows you to set the frequency of the phase-locked loop (PPL). The MITS audio cassette boards have this feature. Make a test tape at least 10 minutes long, then play it back. Adjust the PPL frequency until a stream of Cs appear on the console; then adjust the PPL frequency in the opposite direction. The Cs should not print. Continue adjusting the PPL in the opposite direction again until the Cs appear again. You have now bracketed the usable range of the PPL. Set the PPL adjustment halfway between these two extremes.

There are some other tests you can make while the test tape is playing. Try moving both the audio cables and the AC line cords around to see if certain positions will cause an error. You can also try tapping the tape recorder, the computer case, the boards in the computer, and so on to see how delicate the system is. Pretty soon you will know if you have a reliable tape storage system. Remember to run the test tape at least once a week.

To save data from the computer's memory, including the tape program itself, type

```
>TD<start> <stop> <autostart> <filename>
```

After the D (for dump), give the start address, the stop address, the required autostart address, and an optional filename. A filename is important on

magnetic tape to ensure that you are loading the right program. The auto-start address can be the system monitor address. CP/M programs can be saved on tape using the original filename. Load the program into memory with DDT, SID, or the program FETCH given in the next chapter. Branch to the tape program and give the command

```
>TD100 9AF 100 TAPE.ASM
```

The filename can include the decimal point and the file type.

Each time a new tape is made, it should be verified with the command

```
>TV<filename>
```

A tape can be loaded into memory, at its normal position by typing

```
>TL<filename>
```

At the conclusion of the load, the autostart address is printed on the console then control returns to the monitor. If an incorrect filename is entered, the load operation is aborted and the actual filename on the tape is printed on the console.

During the load operation, all printable characters are displayed on the console. If your console is a printer rather than a video console, you will have to remove this feature to prevent the computer from falling behind. In this case, take out the following three lines from subroutine POUTW.

```
CPI          ' '
RC
OUT          CDATA
```

It is not necessary to verify the load step because of the checksum feature. If the load step was completed, then the tape was correctly read into memory.

The E command can be used instead of the L command for loading data. In this case the computer will branch to the autostart address at the completion of the load. A BASIC interpreter could be saved with the auto-start address set to the BASIC start address. BASIC will then automatically start up at the completion of the E load command. The O command is used to load a tape at an offset from its regular address.

While this binary format is designed for magnetic tape systems, it can be used for paper tape as well. If a tape is punched on a Teletype machine, there will be a strange sound. The reason is that binary, rather than ASCII characters, are being punched. The printout will also be meaningless. But when the resulting tape is read back, the operation is quiet, since the inputted characters are not echoed back on the Teletype.

CHAPTER TEN

Linking Programs to the
CP/M Operating System

The system monitor we developed in Chapters 6 and 7 allows us to communicate with the computer through the console. But this program only provides the bare minimum of operations such as memory display, block move, hex addition and subtraction, and so on. Computers are capable of performing more complicated tasks such as decimal arithmetic, keeping business records, formatting text, and game playing. Computer languages, such as FORTRAN, COBOL, and Pascal, make these tasks easier. These languages will operate on programs (called source programs) that are written by the user.

As an example, a BASIC interpreter, which may be as large as 24K bytes, needs a user's source program for direction. An assembler needs a source file to generate the desired machine code. And, of course, a formatting program needs a work file to produce a finished file.

Because programs to perform these common tasks are so large, an efficient method of loading them into memory is needed. In addition, the output generated by these programs needs to be stored somewhere. Magnetic tape can be used for this purpose, but it tends to be slow. The floppy disk currently is a better medium. It is relatively inexpensive, and the recording medium, the diskette, can be removed. This means that backup copies can be easily generated. In addition, programs can be readily exchanged between users.

We wrote our system monitor to transfer data between the console and the computer proper. Likewise, we need a disk-operating system (DOS) to effect an orderly transfer of information between the disk and the computer. Several different floppy disk systems are available for the 8080 and the Z-80. The disk-operating system that is provided with the disk drives may be relatively primitive, or it may be very elaborate.

A very popular DOS available today for the 8080 and Z-80 is called CP/M. CP/M was initially developed for the 8080 S-100 buss and the 8-inch

soft-sectored floppy disk. It is now available for most of the other configurations, including the 5-inch floppies and the Winchester hard disk. Versions are supplied for computers that don't have an S-100 buss, such as the TRS-80.

CP/M is a software system that must be interfaced to each different computer configuration through a set of software interface routines. Once the interfacing is accomplished, the computer programs that run with CP/M become system independent.

The operating system integrates all of the common tasks. Before CP/M came along, each assembler and BASIC interpreter had to incorporate its own text editor. The user could then write and correct the source program with the built-in editor. But with the CP/M operating system, the editing can be performed separately from program execution. An independent system editor is used to create an ASCII source file. Then a processor program such as BASIC, FORTRAN, Pascal, an assembler, or a text-output formatter can be directed to utilize the source file. The results can be stored in a separate ASCII file on the disk.

It is possible to generate an assembly-language program with the system editor, then assemble it as we did when we developed the system monitor in Chapters 6 and 7. In this case we had to tailor the console input and output routines to the host computer. In particular, we included in the program the address of the console status and data ports, and the read-ready and write-ready status bits. The sense of the status flags was selected with a JZ command corresponding to an active-high flag. As a result of this approach, our system monitor is not portable. The monitor runs on your system, but it might not run on someone else's unless the I/O details are changed.

We approached a solution to this problem in Chapter 8, where we wrote some base-conversion routines. We did not have to write the I/O subroutines into each program because we utilized the ones in the monitor.

When we wrote the monitor, we placed five jump vectors at the beginning. These provided an easy access to the commonly used routines. While this technique greatly simplifies things, it has the disadvantage that three bytes must be set aside for each different entry point. Also, the programmer must keep track of which entry is used for which task.

A better approach is to have only a single entry address for all operations. When this special address is called by an external program, the values in the CPU registers indicate the desired operation and provide the data. The CP/M operating system utilizes this approach. All of the systems operations are performed by calling memory address 5. Up to 37 different operations can be performed in this way. Operations 1 through 11 allow interaction with the four logical peripherals named CONSOLE, LIST, PUNCH, and READER. They are summarized in Table 10.1. Operation 12 allows a program to determine the current CP/M version. The remaining function numbers are used for disk operations such as reading, writing, and head positioning.

The desired operation is selected by placing the proper function number into register C. Sixteen-bit data are transferred in the DE register.

Eight-bit data are transferred in Register E or the accumulator. For example, the console input status can be determined by placing the function number of 11 (decimal) in the C register, and calling address 5.

```
MVI     C,11
CALL    5
```

Table 10.1.   CP/M I/O operations. The function number is placed into register C. Single bytes are in register E. Double bytes are in the D, E register pair.

Function number (in C)	Operation	Value sent	Value returned
1	read CONSOLE		char in A
2	write CONSOLE	char in E	
3	read READER		char in A
4	write PUNCH	char in E	
5	write LIST	char in E	
6	direct console I/O	FF (input; char (output)	char/stat in A
7	get I/O byte		IOBYTE in A
8	set I/O byte	IOBYTE in E	
9	print CONSOLE buffer	buffer address in D, E	
10	read CONSOLE buffer	buffer address in D, E	characters in buffer:
11	CONSOLE status		0 = not ready FF = ready

On return, the accumulator and register E contain the value of FF hex if the console is ready for input, or a zero if not. The byte in the console data register can then be read by calling address 5 with the value of 1 in register C. The byte that is read will be returned in the accumulator.

CP/M MEMORY ORGANIZATION

When CP/M is in operation, the main memory is divided into several regions. In order of decreasing memory, they are:

1. Basic Input/Output System (BIOS)
2. Basic Disk-Operating System (BDOS)
3. Console-Command Processor (CCP)
4. Transient-Program Area (TPA)
5. System parameter area

If the BIOS is especially tailored to a particular system, then it is called the customized BIOS or CBIOS. The BIOS and BDOS regions are collectively known as the Full Disk-Operating System (FDOS). The memory layout is shown in Figure 10.1.

```
        !--------------------! high memory
      -- !       BIOS         !
FDOS {    !--------------------!
      -- !       BDOS         !
        !--------------------!
        !       CCP          !
        !--------------------!
        !       TPA          !
        !--------------------! 100 hex
        ! system parameters  !
        !--------------------! low memory
```
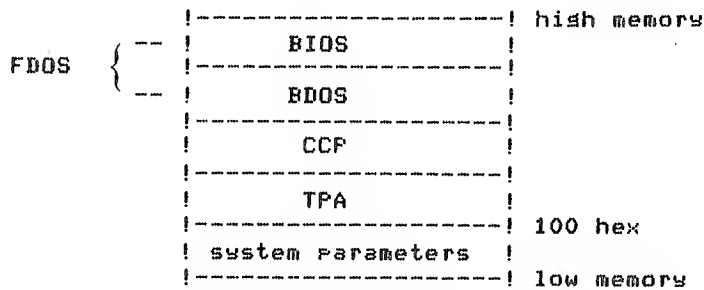
Figure 10.1   A memory map for CP/M.

BIOS contains the tailor-made routines for operation of all the peripheral devices such as the console, printer, disk drives, phone modem, and tape drives. BDOS has the hardware-independent routines for the disk operating system. The CCP handles the console commands. It contains the built-in routines such as DIR, LIST, and ERA. Separate programs such as PIP, DDT, and user-written programs execute in the TPA.

The lowest memory area contains several different items. The first is a warm-boot entry to BIOS. The first few entries are:

Address	Action	Purpose
0	JMP BIOS+3	warm start entry
3	IOBYTE	peripheral assignment
4	disk	current drive number
5	JMP BDOS+6	peripheral control
5C hex	FCB	command-line argument

CHANGING THE PERIPHERAL ASSIGNMENT

CP/M can interact with four logical peripheral devices. These are termed:

    CON: console
    LST: list (printer)
    PUN: punch
    RDR: (tape) reader

Each of these four logical devices can be assigned to four different physical devices. The 16 different possible combinations can all be encoded into the IOBYTE located at memory address 3. The colon is part of the name; it is used when referring to peripheral devices. Disk filenames, on the other hand, are written without the colon.

The actual mapping of the logical devices into the desired physical devices must be accomplished in BIOS. Since there are so many different possibilities, it is not likely that the system supplied by your dealer will have

the IOBYTE features fully implemented. The CP/M logical console is probably mapped into your video terminal and the logical list device will be mapped into your printer. But the punch and reader might be mapped into your video terminal.

Even if you have only two peripherals, it may be useful to set up the IOBYTE feature. For example, suppose that you have both a video terminal and a printer such as a Decwriter or Teletype that has its own keyboard. Then either peripheral can be used for the console input and either can be used for the console output. The four physical console arrangements could correspond to:

IOBYTE	Input	Output
0	video	video (default)
1	video	printer
2	printer	printer
3	printer	video

Your customized BIOS (CBIOS) will set the default combination on a cold start. But any user program can change the IOBYTE to a new configuration. Also, the CP/M programs STAT and DDT can be used to alter the IOBYTE. The instructions in CBIOS will sample the IOBYTE and act accordingly.

Suppose that the IOBYTE is set to zero, and you load a BASIC interpreter. You develop a program that sends information to the console. The program will include statements like

```
. . .
PRINT I, X(I), Y(I)
. . .
```

The resulting output appears on the console video screen. After the program is debugged, you would like a hard-copy output of the program results. This is easily done if you have incorporated the IOBYTE feature. You can change the IOBYTE with the POKE command in the BASIC interpreter.

```
POKE 3, 1
RUN
```

The POKE command will change the IOBYTE at address 3 from a zero to a 1. Console output will now appear at the printer when the BASIC program is run. Of course, console input has not changed; it still comes from the video terminal. At the conclusion of the run, the IOBYTE can be restored with another POKE command.

```
POKE 3, 0
```

As another example, suppose that you have a Teletype for your list device and it has a paper tape reader and punch. You can easily make BASIC

tapes and reload them using the IOBYTE features. POKE the IOBYTE to a value of 1 for punching a source tape. This will map the Teletype output into the logical console output. Give the BASIC commands

```
NULL 3
LIST
```

to make a tape of the source program.

Later, you can reload the tape into BASIC by setting the IOBYTE to a value of 3.

```
POKE  3, 3
```

Just put the tape into the reader and turn it on. With this configuration, the Teletype keyboard and tape reader perform the console input. But the video screen is used for console output. After the tape has been read, give the command

```
POKE 3, 0
```

from the Teletype keyboard to return to the console keyboard.

INCORPORATING THE IOBYTE INTO YOUR CBIOS

You will have to reassemble your CBIOS if you want to incorporate the IOBYTE feature. A sample CBIOS that uses the IOBYTE is given in Listing 5.1. This version additionally features such things as an interrupt-driven keyboard and connection to a telephone modem.

At the beginning of BIOS there are seven jump vectors that are used by other parts of CP/M.

```
JMP     INIT    ;initialization
JMP     CONST   ;console status
JMP     CONIN   ;console input
JMP     CONOUT  ;console output
JMP     LOUT    ;list output
JMP     PUNCH   ;punch
JMP     READR   ;reader
```

Because of these fixed entry points, BIOS can be altered without having to alter any other part of CP/M. There are four regions of BIOS that need to be changed if the IOBYTE feature is incorporated into console routines. These are the routines for initialization, console status, console input, and console output. We have to set the IOBYTE to the default value in the initialization section of BIOS. Then, at the beginning of the three console routines, we have to read the IOBYTE at address 3, and branch to the appropriate subroutine.

In accordance with the step-by-step approach to programming we used in Chapter 6, we will not make all the changes at one time. The first alteration will be to the initialization and output routines.

Incorporating the IOBYTE into Output Routines

First locate the initialization region of BIOS. This area is referenced by the first jump instruction at the beginning of BIOS. Add the following instructions somewhere in the initialization routine.

```
MVI       A,0      ;set a zero
STA       3        ;SET IOBYTE
```

The safest places to put them are at the very beginning of the initialization section or at the end, just before the RET instruction. We could, of course, use an XRA A instruction rather than the MVI A,0 instruction shown above. This would reduce the size of BIOS by one byte. But if we later wanted BIOS to initialize the IOBYTE to 3 we would have to reassemble BIOS. With the MVI instruction, we can easily change the argument of zero to a 3 by using the system debugger.

Refer to the label START at the beginning of Listing 4.1 where there is a series of jump instructions.

```
        . . .
START:
        JMP       INIT     ;INITIALIZATION
        JMP       CONST    ;CONSOLE STATUS
        JMP       CONIN    ;CONSOLE INPUT
        JMP       CONOUT   ;CONSOLE OUTPUT
        . . .
```

Locate the address of the console-output routine. This can be found from the fourth jump instruction, JMP CONOUT in this case. We will now alter the console-output routine so that it will read the IOBYTE at memory address 3 and act accordingly. The upper six bits, which refer to the list, punch, and reader, are reset by performing a masking AND with the value of 3.

```
XXXX XX01  or   XXXX XX10    IOBYTE
        11               11   AND with 3
---------      ---------
0000 0001  or   0000 0010    IOBYTE
```

The two low-order bits then determine whether output is sent to the console or to the printer. If the resulting value is a 1 or a 2, then a branch is made to the printer-output routine. Otherwise, output goes to the video console. Printer output corresponds to the following IOBYTE bit patterns.

```
0000 0001   or    0000 0010    IOBYTE
        11                11    AND with 3
---------          ---------
0000 0001 = 1      0000 0010  = 2
```

The other two possible IOBYTE patterns correspond to console output.

```
0000 0000 = 0   or   0000 0011 = 3
```

Notice that parity is odd for printer output but parity is even for console output. Thus the BIOS code at this point is programmed to jump to the list-output routine if parity is odd.

```
;
; LOGICAL CONSOLE OUTPUT
;
CONOUT: LDA     IOBYTE   ;GET ASSIGNMENT
        ANI     3        ;MASK FOR CONSOLE
        JPO     LOUT     ;LIST OUTPUT
;
; VIDEO-OUTPUT ROUTINE
;
VIDEO:. . . (existing routine)
        . . .
;
; LIST-OUTPUT ROUTINE
;
LOUT:   . . . (existing routine)
        . . .
```

Assemble the new BIOS and try it out. We can use the system debugger DDT or SID to load the new CBIOS over the old one. The command is

```
A>DDT CBIOS.HEX
```

One word of caution: Since the debugger uses the routines in CBIOS, there may be a problem. A safer way to put the new CBIOS into place is to first load it somewhere else.

Use the hex arithmetic command of DDT to calculate the offset. Suppose that BIOS is assembled for the address DB00 hex and you want to load it temporarily at 100 hex. Then the command

```
H100 DB00
```

will give both the sum and difference of the two addresses. The difference is what we need. Load CBIOS with the indicated offset

```
ICBIOS.HEX
R(offset)
```

DDT will indicate the location of the end of BIOS. The move command can now be used to put BIOS into its proper place.

```
M100   2FF   DB00
```

The second address will be the present end of BIOS. The new BIOS is now in place. If the debugger no longer works, there may be an error in BIOS or there may have been an error in the move command.

If everything appears to be all right, try out the IOBYTE feature. Use the S (set) command of the debugger to change the IOBYTE at address 3. Change the value of the IOBYTE from a zero to a 1.

```
S3
0003   00   1 (type a 1)
0004   00   . (type a decimal point)
```

The (logical) console output should now appear at the printer instead of the console. Notice that this is different from typing a control-P when the IOBYTE has a value of zero. In fact, if a control-P is typed at this time, each typed character should be printed twice. Return the logical console output to the console by changing the IOBYTE back to zero using DDT.

```
S3
0003   01   0 (type a 0)
0004   00   . (type a decimal point)
```

Output should return to the console.

If everything appears to be all right, you are still not finished. You have a working copy of BIOS in memory; now you must get a copy onto the system tracks of the disk. *Continue with this section if you want to write a permanent copy of the new BIOS onto the disk. Otherwise, go on to the second part of the alteration where you will add the IOBYTE feature to the console input routines.* Then come back to this section to save the completed BIOS. If you have a Lifeboat version of CP/M, you can easily copy the new version of BIOS to the disk. Just give the command

```
A>SAVEUSER
```

and the new BIOS will be copied to the system disk.

Another method of getting the new CBIOS on the disk system tracks is to use SYSGEN. The current version of CPM is loaded into memory with the DDT command

```
A>DDT CPMXX.COM
```

where XX refers to the memory size. Then move the working version of BIOS down to the proper SYSGEN position using the DDT move command. Alternately, the HEX file of CBIOS could be copied from disk into memory.

The SYSGEN location for BIOS should be given in your CP/M documentation. Perform a warm start with a control-C, and then give the command

```
A>SYSGEN
```

Answer the first question about where to get the system by typing just a carriage return. The second question asks where to put the system. Give the appropriate drive name, A, B, etc. The new BIOS will now be copied to disk.

Incorporating the IOBYTE into Input Routines.

We are now ready to implement the second part of the console IOBYTE feature. This will allow the logical console input to be obtained from either of two keyboards. One of these keyboards will be the video terminal; the other will be the printer. If you don't have a second keyboard, go on to the next section.

Locate the console status and the console input routines. These are found from the second and third entries of the jump table of BIOS. Your present console-input routine may be coded in one of two ways. One method is straight-forward. The input routine has a status check independent of the regular BIOS status routine.

```
;
; CONSOLE INPUT ROUTINE
;
CONIN:  IN      CSTAT   ;GET STATUS
        ANI     CIMSK   ;MASK FOR INPUT
        JZ      CONIN   ;LOOP UNTIL READY
        . . .
```

The other method uses the BIOS status routine.

```
;
; CONSOLE INPUT ROUTINE
;
CONIN:  CALL    CONST   ;GET STATUS
        JZ      CONIN   ;LOOP UNTIL READY
        . . .
```

Although either method can be altered to include the IOBYTE feature, the former method will be demonstrated here. We will need two separate input routines. One is for the video screen and the other is for the printer or other keyboard. Our new console input routine might look like this.

```
;
; LOGICAL CONSOLE INPUT
;
CONIN:  LDA     IOBYTE  ;GET ASSIGNMENT
        ANI     2       ;MASK FOR LIST
        JNZ     LISTIN  ;LIST INPUT
```

```
;
; VIDEO INPUT
;
VIDIN:  IN      CSTAT   ;GET STATUS
        ANI     CIMSK   ;MASK FOR INPUT
        JZ      VIDIN   ;LOOP UNTIL READY
        IN      CDATA   ;GET DATA
        ANI     7FH     ;MASK PARITY
        RET
;
; INPUT FROM PRINTER
;
LISTIN: IN      LSTAT   ;GET STATUS
        ANI     LIMSK   ;MASK FOR INPUT
        JZ      LISTIN  ;LOOP UNTIL READY
        IN      CDATA   ;GET DATA
        ANI     7FH     ;MASK PARITY
        RET
```

The third jump statement at the beginning of BIOS should branch to the label CONIN. The IOBYTE at memory address 3 is read. All bits but bit 1 (the second bit) are zeroed with the ANI 2 command. List input corresponds to an IOBYTE of 2 or 3. The logical AND with 2 and either value will produce the result of 2.

```
0000 0010  or   0000 0011   IOBYTE
        10               10  AND with 2
---------       ---------
0000 0010       0000 0010  = 2
```

The JNZ instruction will then cause a branch to the list-input routine. Otherwise, program flow will continue on to the console-input routine.

A similar construction can be used for the console status routine.

```
;
; LOGICAL CONSOLE-INPUT STATUS
;
CONST:  LDA     IOBYTE  ;GET ASSIGNMENT
        ANI     2       ;MASK FOR LIST
        JNZ     LISTST  ;LIST
;
; INPUT FROM VIDEO
;
VSTAT:  IN      CSTAT   ;CHECK STATUS
        ANI     CIMSK   ;MASK FOR INPUT
        RZ              ;NO READY
        MVI     A,OFFH  ;SET FOR READY
        RET
;
; INPUT FROM LIST
;
LISTST: IN      LSTAT   ;CHECK STATUS
        ANI     LIMSK   ;MASK FOR INPUT
        RZ              ;NOT READY
        MVI     A,OFFH  ;SET FOR READY
        RET
```

Assemble the new version of BIOS and try it out as we did in the previous section. Load the debugger, then use it to change the IOBYTE at address 3. First, change the IOBYTE to a value of 3. This will assign the logical console input to the printer (or other alternate keyboard) and logical console output to the video screen. As soon as you make the change, all further input must come from the printer. Use the debugger to change the IOBYTE to a value of 2. Now logical console input must come from the printer, and logical console output will appear at the printer. Finally, change the IOBYTE back to the value of zero. Console input and output should both go through the video terminal.

USING STAT TO CHANGE THE IOBYTE

The CP/M program called STAT can be used to symbolically change the IOBYTE. STAT can also be used to determine the current value of the IOBYTE. Each of the four logical devices CON: (console), RDR: (reader), PUN: (punch), and LST: (list) can be assigned to four different physical devices.

Logical device		Physical device		
	1	2	3	4
CON: console	TTY:	CRT:	BAT:	UC1:
RDR: reader	TTY:	PTP:	UR1:	UR2:
PUN: punch	TTY:	PTP:	UP1:	UP2:
LST: list	TTY:	CRT:	LPT:	UL1:

The first column represents the four logical peripherals. The remaining entries on each line represent the four physical devices. You can easily change these names in STAT to something more descriptive. Load STAT into memory with the debugger.

```
DDT STAT.COM
```

Then dump the first few lines.

```
D100 16F
```

You will see the names of the logical peripherals and the physical peripherals encoded in ASCII. You can now change any of the names to something else. You might want to choose the names

    CRT:
    LST:
    LPT:
    LCR:

for the four console devices. These four names correspond to the IOBYTE values of 0 through 3. After you change the names with the debugger, return to CP/M and save the altered STAT. If the IOBYTE is currently set to zero and you type the command

```
A>STAT  CON:=LST:
```

STAT will change the IOBYTE to a value of 1 and console output will appear at the printer. The IOBYTE can be set back to zero with the command

```
A>STAT CON:=CRT:
```

If you have other peripherals, such as a phone modem, these can also be incorporated into IOBYTE. The logical punch can then be sent to the modem, the printer, or the console. A disk file can be sent over the phone modem with the command

```
A>STAT  PUN:=B:CPMIO.ASM
```

where CPMIO.ASM is a disk file on drive B. As you can see, there is room for a lot of imagination.

A ROUTINE TO GO ANYWHERE IN MEMORY

The assembly language program shown in Listing 10.1 can be used to branch to any location in memory. Executable programs in CP/M are usually designed to be run starting at address 100 hex, since this is where programs are loaded by CP/M. There are times, however, when it is desirable to assemble a program for operation at some other location. The system monitor developed in Chapter 6 is one such program. If this monitor is to be located in ROM, then it must be placed above the CP/M operating system. A location of F000 hex would be ideal. But there is no easy way to get to the monitor from the CP/M system. If the GO routine is located on disk drive A, then we have only to give the CP/M command

```
A>GO  F000
```

and a branch will occur to the address F000 hex.

The GO program demonstrates several of the I/O features available with CP/M. The branch address given as an argument on the above command line is read from a region of memory called the file-control block (FCB). The address of the FCB is 5C hex but the ASCII-encoded address starts at 5D hex. The input address, F000 in this example, is a valid hexadecimal number; it is to be converted from ASCII into a 16-bit binary number. The result is placed into the CPU program counter so that the computer will branch to the desired address. The address format is free-form, and leading zeros are

Listing 10.1 A program to go anywhere in memory.

```
                  ; (date goes here)
                  ;
                          TITLE    'GO (jump anywhere)'
                  ;
                  ; USAGE: TYPE GO F800 TO JUMP TO F800 HEX
                  ;
0100                      ORG      100H
                  ;
0005 =            BDOS     EQU      5           ;DOS ENTRY POINT
005C =            FCB      EQU      5CH         ;FILE CONTROL BLOCK
0009 =            PBUF     EQU      9           ;PRINT BUFFER
000A =            RDBUF    EQU      10          ;READ CONSOLE BUFFER
000D =            CR       EQU      0DH         ;CARRIAGE RETURN
000A =            LF       EQU      0AH         ;LINE FEED
                  ;
                  START:
0100 215D00                LXI      H,FCB+1 ;GET ARGUMENT IF ANY
0103 7E                    MOV      A,M     ;FIRST BYTE
0104 FE20                  CPI      ' '     ;BLANK?
0106 CA3B01                JZ       ERROR   ;NO ARGUMENT
0109 229B01       AGAIN:   SHLD     RBUFP   ;SAVE POINTER
010C CD1001                CALL     READHL  ;GET ADDRESS
010F E9                    PCHL             ;GO TO ADDRESS
                  ;
                  ; CONVERT ASCII-HEX CHARACTERS
                  ; TO 16-BIT BINARY NUMBER IN H,L
                  ;
0110 210000       READHL:  LXI      H,0     ;START WITH 0
0113 CD6301       RDHL2:   CALL     GETCH   ;GET A BYTE
0116 FE20                  CPI      ' '     ;END?
0118 C8                    RZ               ;YES
0119 CD2801                CALL     NIB     ;TO BINARY
011C DA3801                JC       RDHL4   ;NOT HEX
011F 29                    DAD      H       ;TIMES 2
0120 29                    DAD      H       ;TIMES 4
0121 29                    DAD      H       ;TIMES 8
0122 29                    DAD      H       ;TIMES 16
0123 B5                    ORA      L       ;COMBINE NEW
0124 6F                    MOV      L,A     ;PUT BACK
0125 C31301                JMP      RDHL2   ;NEXT
                  ;
                  ; CONVERT ASCII TO BINARY
                  ;
0128 D630         NIB:     SUI      '0'     ;ASCII BIAS
012A D8                    RC               ; < 0
012B FE17                  CPI      'F'-'0'+1
012D 3F                    CMC
012E D8                    RC               ; > F
012F FE0A                  CPI      10
0131 3F                    CMC
0132 D0                    RNC              ;A NUMBER 0-9
0133 D607                  SUI      'A'-'9'-1
0135 FE0A                  CPI      10
0137 C9                    RET
                  ;
```

```
                    ; BLANK AT END OF LINE IS OK
                    ; ELSE AN ERROR
                    ;
0138 FEF0   RDHL4:  CPI     ' '-'0'
013A C8             RZ
                    ;
                    ; IMPROPER ARGUMENT, TRY AGAIN
                    ;
013B 117501 ERROR:  LXI     D,MESG   ;POINT TO MESSAGE
013E CD5901         CALL    PRINT    ;SEND IT
0141 119D01         LXI     D,RBUFM  ;INPUT BUFFER
0144 CD5E01         CALL    READB    ;GET A LINE
0147 1600           MVI     D,0
0149 3A9E01         LDA     RBUFL    ;BUFFER LENGTH
014C 5F             MOV     E,A
014D 219F01         LXI     H,RBUF
0150 19             DAD     D        ;PAST BUFFER
0151 3620           MVI     M,' '    ;PUT IN BLANK
0153 219F01         LXI     H,RBUF
0156 C30901         JMP     AGAIN    ;TRY AGAIN
                    ;
                    ; PRINT CHARACTERS UNTIL $ IS FOUND
                    ;
0159 0E09   PRINT:  MVI     C,PBUF   ;SET FOR PRINT
015B C30500         JMP     BDOS
                    ;
                    ; INPUT A LINE FROM CONSOLE
                    ;
015E 0E0A   READB:  MVI     C,RDBUF  ;READ INPUT BUFFER
0160 C30500         JMP     BDOS
                    ;
                    ; GET A CHARACTER FROM THE INPUT BUFFER
                    ;
0163 E5     GETCH:  PUSH    H
0164 2A9B01         LHLD    RBUFP    ;GET POINTER
0167 7E             MOV     A,M      ;GET NEXT CHAR
0168 23             INX     H        ;INCREMENT POINTER
0169 229B01         SHLD    RBUFP    ;SAVE POINTER
016C FE61           CPI     'Z'+7    ;UPPER CASE?
016E DA7301         JC      GETC2    ;NO
0171 E65F           ANI     5FH      ;MAKE UPPER CASE
0173 E1     GETC2:  POP     H
0174 C9             RET
            MESG:
0175 474F206572     DB      'GO error, Input '
0185 7468652061     DB      'the address again,'
0197 0D0A2A24       DB      CR,LF,'*$'
                    ;
019B 9F01   RBUFP:  DW      RBUF     ;BUFFER POINTER
019D 0A     RBUFM:  DB      10       ;MAX SIZE
019E        RBUFL:  DS      1        ;ACTUAL SIZE
019F        RBUF:   DS      1        ;INPUT BUFFER
                    ;
01A0                END
```

unnecessary. If more than four characters are entered, only the last four are used. Thus, all of the following are valid.

0	F000
900	PF800
6000	

If no argument is given to the GO command, or if an invalid hexadecimal address is entered, then an error message is printed. This step uses the console string-output feature, selected with the function code of 9 in register C. The DE register pair is loaded with a pointer to the string location in memory. A dollar sign ($) is used to indicate the end of the string. In subroutine SENDM of Chapter 6, a binary zero is used for this purpose since it requires less code.

The user can retype the desired address after the error message has been printed. This time, however, the program reads the input string data in a different way. The console string-input operation is selected by loading the C register with the function number of 10. If the new string is a valid hex number, it is converted to a 16-bit binary number. The computer then jumps to this address. If the input is still invalid, the error routine is repeated again.

During the input operation, the usual CP/M commands are available for error correction. For example, the most recently typed character can be deleted by pressing the DEL key. A control-R will reprint the current line in its corrected form. A control-U cancels the entire line so that it can be retyped. If Version 2 of CP/M is being used, then the backspace character, control-H, can also be used for correcting errors. Finally, a control-C can be entered to abort the entire program. This returns control to the CP/M operating system.

Enter the GO program in Listing 10.1. Assemble it and try it out. GO is a universal program; it will work on any system. If you have a monitor located in memory, use GO to branch to it; if not, you can still try out the GO program. Type just the command of GO without an argument. An error message should be printed. Type some characters, then delete some of them with the DEL key. The deleted characters will be printed a second time. Reprint the line with a control-R to see the correct version. Finally return to CP/M by giving the address of zero.

```
GO 0
```

A control-C can also be used to return to CP/M.

A LIST ROUTINE WITH DATE AND TIME

In Chapter 7 we developed a monitor routine for sending data to a separate list device. When this routine is activated with a control-P command, the output appears at both the console and the printer. CP/M has a similar

arrangement. A control-P command will activate the list device, too. Output is then sent to both the console and the printer.

But the console and list routines are entirely separate in CP/M. Output can therefore be sent specifically to the list device and it will not appear on the console. In CP/M I/O operations, a function number of 2 corresponds to console output, and a function number of 5 corresponds to list output. If memory address 5 is called with a value of 2 in the C register, then the byte in the E register will be displayed on the system console. On the other hand, if a function number of 5 is placed in the C register, then the byte in register E will appear on the list device. The byte in the E register can be sent to the punch by loading a function number of 4 into the C register.

This complexity may seem unnecessary, since the list device can be turned on by typing a control-P. If the command

```
A>TYPE <filename>
```

were given, then the file would be sent to both the console and the printer. The disadvantage of this method is that the TYPE command line will appear on the printer output. Also, when the listing is finished, the new prompt of A> will be printed on the listing.

The CP/M utility program PIP can be used to send a disk file specifically to the list device. The command is

```
A>PIP  LST:=<filename>[T8]
```

The argument T8, embedded in brackets, will expand the ASCII tab character to 8-column fields. PIP, however, does not automatically eject a new page when a form feed is encountered.

The LIST program in Listing 10.2 can be used to send an ASCII disk file to the printer, too. It will automatically expand the ASCII tab character. Furthermore, when a form-feed character is encountered, LIST will add the correct number of lines to the end of the page. At the end of the disk file, additional line feeds are issued to finish the page. This will ensure that the printer will start the next task on a new page. If the file contains an odd number of pages, then an extra blank page is added to the end. Without this feature you will have to refold about half of the output.

If your computer keeps track of the date and time, LIST can print current values at the top of the first page. The name of the disk file is also printed on this line.

LIST is a very small program, requiring only 1K bytes of memory. It was derived from the program called DUMP in the CP/M *Interface Guide*. LIST bears only a passing resemblance to DUMP, however. DUMP is designed to convert binary files to ASCII-hex characters and display them on the console. LIST, on the other hand, prints ASCII files directly with no conversion. Since the CP/M BDOS is used for all I/O and disk operations, LIST will operate with all standard CP/M systems.

Listing 10.2. List an ASCII disk file.

```
                        ; SEND ASCII DISK FILE TO LIST
                        ; PUT DATE AND TIME AT TOP OF PAGE
                        ; ENTIRE FILE LOADS INTO MEMORY FIRST
                        ; FORMFEEDS ADDED WITH F ARGUMENT
                        ; EXTRA PAGE ADDED TO MAKE TOTAL EVEN
                        ;   UNLESS A P OPTION IS GIVEN
                        ;
                        ; USAGE:
                        ;       LIST <filename>
                        ;       LIST <filename> F (add form feeds)
                        ;       LIST <filename> P (no extra page)
                        ;       LIST <filename> n (skip n lines)
                        ;
                        ; (date goes here)
                        ;
                        TITLE   'List an ASCII disk file.'
                        ;
0100                    ORG     100H
0005 =                  BDOS    EQU     5           ;DOS ENTRY POINT
0001 =                  CONS    EQU     1           ;READ CONSOLE
0005 =                  TYPEF   EQU     5           ;LIST OUTPUT
0009 =                  PBUF    EQU     9           ;PRINT CONSOLE BUFFER
000B =                  BRKF    EQU     11          ;KILL? (TRUE IF CHAR)
000F =                  OPENF   EQU     15          ;FILE OPEN
0014 =                  READF   EQU     20          ;READ FUNCTION
000D =                  CR      EQU     0DH         ;CARRIAGE RETURN
000A =                  LF      EQU     0AH         ;LINE FEED
001A =                  EOF     EQU     1AH         ;END OF FILE
0009 =                  TAB     EQU     9           ;^I
000C =                  FORMFD  EQU     0CH         ;FORM FEED
003A =                  LINES   EQU     58          ;LINES/PAGE
0042 =                  LMAX    EQU     66          ;MAX LINES
                        ;
005C =                  FCB     EQU     5CH         ;FILE CONTROL BLOCK
0080 =                  BUFF    EQU     80H         ;DISK BUFFER ADDR
                        ;
                        ; FILE-CONTROL BLOCK DEFINITIONS
                        ;
005D =                  FCBFN   EQU     FCB+1       ;FILE NAME
0068 =                  FCBRL   EQU     FCB+12      ;CURRENT REEL #
007C =                  FCBCR   EQU     FCB+32      ;NEXT REC #(0-127)
                        ;
                        ; TIME AND DATE FROM A COMPU/TIME BOARD
                        ;
00C4 =                  ADATA   EQU     0C4H        ;PORT A DATA
00C5 =                  ACONT   EQU     ADATA+1     ;PORT A CONTROL
00C7 =                  BCONT   EQU     ADATA+3     ;PORT B CONTROL
00C6 =                  BDATA   EQU     ADATA+2     ;PORT B DATA
                        ;
                        ; SAVE OLD STACK AND SET UP A NEW ONE
                        ;
0100 210000    START:   LXI     H,0
0103 39                 DAD     SP
0104 22E004             SHLD    OLDSP       ;SAVE STACK
0107 310005             LXI     SP,STACK
010A 111E04             LXI     D,RULES
010D CD3E02             CALL    PRINT       ;HOW TO ABORT
```

```
                         ;
                         ; HOW MANY LINES TO SKIP BEFORE STARTING?
                         ;
0110 210000              LXI    H,0
0113 016D00              LXI    B,6DH      ;3RD ARGUMENT
0116 0A         SKIP2:   LDAX   B          ;GET CHARACTER
0117 FE20                CPI    ' '        ;BLANK AT END
0119 CA4001              JZ     SKIP3      ;DONE
011C FE46                CPI    'F'        ;NEED FORM FEEDS?
011E CA3C01              JZ     FORM       ;YES
0121 FE50                CPI    'P'        ;EXTRA PAGE?
0123 CA3601              JZ     NOPAGE     ;NO
0126 D630                SUI    '0'        ;REMOVE ASCII BIAS
                         ;
                         ; CONVERT ASCII DECIMAL TO BINARY IN H,L
                         ;
0128 54                  MOV    D,H        ;DUPLICATE
0129 5D                  MOV    E,L        ;H,L IN D,E
012A 29                  DAD    H          ;TIMES 2
012B 29                  DAD    H          ;TIMES 4
012C 19                  DAD    D          ;TIMES 5
012D 29                  DAD    H          ;TIMES 10
012E 5F                  MOV    E,A
012F 1600                MVI    D,0
0131 19                  DAD    D          ;ADD NEW BYTE
0132 03                  INX    B          ;INCR POINTER
0133 C31601              JMP    SKIP2      ;NEXT
                         ;
0136 32D904   NOPAGE:    STA    PFLAG      ;NO EXTRA PAGE
0139 C33F01              JMP    ZERO
                         ;
013C 32D804   FORM:      STA    FFLAG      ;SET FOR FORM FEEDS
013F AF       ZERO:      XRA    A          ;RESET COUNT
0140 22DA04   SKIP3:     SHLD   SKIPB      ;SAVE BINARY CNT
                         ;
                         ; READ AS MUCH AS POSSIBLE INTO MEMORY
                         ;
0143 CDB302              CALL   SETUP      ;SET UP INPUT FILE
0146 3E80                MVI    A,80H
0148 32DE04              STA    IBP        ;SET POINTER TO 80H
014B 32D304              STA    TIME2      ;SET 1ST PASS
                         ;
014E 2ADA04              LHLD   SKIPB      ;HOW MANY LINES?
0151 7C       MAIN6:     MOV    A,H
0152 B5                  ORA    L          ;H,L = 0?
0153 CA6401              JZ     MAIN5      ;NO SKIP
0156 E5       MAIN7:     PUSH   H
0157 CD4302              CALL   GNB        ;NEXT BYTE
015A E1                  POP    H
015B FE0D                CPI    CR
015D C25601              JNZ    MAIN7      ;LOOK FOR CR
0160 2B                  DCX    H          ;DECR COUNT
0161 C35101              JMP    MAIN6
                         ;
0164 AF       MAIN5:     XRA    A
0165 32D504              STA    FULL       ;RESET FLAG
0168 CD4302   MAIN2:     CALL   GNB        ;GET A BYTE
016B E5                  PUSH   H
```

```
016C 2ADC04              LHLD    BUFFP    ;MEMORY POINTER
016F 77                  MOV     M,A      ;PUT BYTE IN
0170 23                  INX     H
0171 22DC04              SHLD    BUFFP    ;SAVE POINTER
0174 47                  MOV     B,A
0175 3EFF                MVI     A,0FFH
0177 BD                  CMP     L        ;L=0?
0178 C28B01              JNZ     MAIN4    ;NO
            ; CHECK FDOS
017B 3A0700              LDA     7        ;FDOS
017E D60A                SUI     10       ;CCP -1
0180 BC                  CMP     H        ;TOO BIG?
0181 D28B01              JNC     MAIN4    ;NO
0184 3E1A                MVI     A,EOF
0186 77                  MOV     M,A      ;PUT IN MEMORY
0187 32D504              STA     FULL     ;SET FOR FULL
018A 47                  MOV     B,A
018B 78        MAIN4:    MOV     A,B      ;GET BYTE
018C E1                  POP     H
018D FE1A                CPI     EOF
018F C26801              JNZ     MAIN2    ;NO
            ;
            ; CHECK FOR EOF AT END
            ;
0192 2ADC04              LHLD    BUFFP    ;GET POINTER
0195 2B                  DCX     H
0196 3E1A                MVI     A,EOF
0198 BE                  CMP     M        ;EOF?
0199 CAA101              JZ      MAIN3    ;YES
019C 23                  INX     H
019D 77                  MOV     M,A      ;PUT IN EOF
019E 22DC04              SHLD    BUFFP
            ;
01A1 CD7C02    MAIN3:    CALL    RESET    ;POINTER
            ;
            ; PUT TIME AT START OF LISTING
            ; REMOVE FORMFEED IF FIRST
            ;
01A4 CD5D03              CALL    CLOCK    ;GET TIME
01A7 3AD804              LDA     FFLAG    ;FORMFEEDS?
01AA B7                  ORA     A
01AB C4F601              CNZ     TWOLN    ;YES
01AE CD5F02              CALL    GETB     ;GET BYTE
01B1 FE0C                CPI     FORMFD   ;FORMFEED
01B3 C2BC01              JNZ     GLOP2    ;NO
01B6 CDF601              CALL    TWOLN    ;SEND 2 LF
            ;
01B9 CD5F02    GLOOP:    CALL    GETB     ;GET NEXT BYTE
01BC 47        GLOP2:    MOV     B,A      ;SAVE BYTE
01BD CDFD02              CALL    TABO     ;PRINT BYTE
01C0 78                  MOV     A,B      ;GET BYTE AGAIN
01C1 FE0A                CPI     LF       ;END OF LINE?
01C3 C2B901              JNZ     GLOOP    ;NO
01C6 3AD604              LDA     LCOUNT   ;GET COUNT
01C9 3C                  INR     A        ;INCREMENT IT
01CA 32D604              STA     LCOUNT   ;SAVE IT
01CD FE42                CPI     LMAX     ;TOO MANY?
01CF D43202              CNC     NPAGE    ;YES, RESET
01D2 3AD804              LDA     FFLAG    ;FORM FEEDS?
```

```
01D5 B7                  ORA     A
01D6 CAB901              JZ      GLOOP      ;NO
01D9 3AD604              LDA     LCOUNT     ;GET COUNT
01DC FE3A                CPI     LINES      ;END OF PAGE?
01DE DAB901              JC      GLOOP      ;NO
01E1 CD1B02              CALL    FILL       ;NEW PAGE
01E4 CDF601              CALL    TWOLN
01E7 C3B901              JMP     GLOOP
                 ;
                 ; CHECK FOR ABORT, ANY KEY PRESSED
                 ;
01EA E5          ABORT:  PUSH    H          ;SAVE
01EB D5                  PUSH    D
01EC C5                  PUSH    B
01ED 0E0B                MVI     C,BRKF     ;CONSOLE READY?
01EF CD0500      PCHAR2: CALL    BDOS
01F2 C1                  POP     B          ;RESTORE
01F3 D1                  POP     D
01F4 E1                  POP     H
01F5 C9                  RET
                 ;
01F6 060A        TWOLN:  MVI     B,LF       ;TWO LINES
01F8 3AD604              LDA     LCOUNT
01FB 3C                  INR     A          ;ADD 2 TO
01FC 3C                  INR     A          ;COUNT
01FD 32D604              STA     LCOUNT
0200 CD0302      OUTT2:  CALL    OUTT       ;DOUBLE OUTPUT
                 ;
0203 78          OUTT:   MOV     A,B        ;OUTPUT FROM B
                 ;
                 ; SEND CHARACTER FROM A TO LIST
                 ;
0204 E5          PCHAR:  PUSH    H
0205 D5                  PUSH    D
0206 C5                  PUSH    B          ;SAVED
0207 0E05                MVI     C,TYPEF    ;LIST
0209 5F                  MOV     E,A
020A FE0C                CPI     FORMFD     ;FORMFEED?
020C C2EF01              JNZ     PCHAR2     ;PRINT BYTE
                 ;
                 ; FILL OUT PAGE AFTER FORMFEED
                 ;
020F CD1B02              CALL    FILL
0212 060A                MVI     B,LF       ;FOR FORMFEED
0214 CD0302              CALL    OUTT
0217 C1                  POP     B
0218 D1                  POP     D
0219 E1                  POP     H
021A C9                  RET
                 ;
                 ; FILL OUT END OF PAGE
                 ;
021B 3AD604      FILL:   LDA     LCOUNT     ;LINE COUNT
021E 4F                  MOV     C,A
021F CD3202              CALL    NPAGE      ;INCR PAGE
0222 3E42                MVI     A,LMAX
0224 91                  SUB     C
0225 D8                  RC                 ;TOO BIG
```

```
0226  C8                       RZ
0227  4F                       MOV     C,A
0228  060A                     MVI     B,LF
022A  CD0302     FILL2:        CALL    OUTT       ;SEND LF
022D  0D                       DCR     C
022E  C22A02                   JNZ     FILL2
0231  C9                       RET
                  ;
                  ; RESET LINE COUNT, INCREMENT PAGES
                  ;
0232  AF         NPAGE:        XRA     A          ;GET A ZERO
0233  32D604                   STA     LCOUNT     ;LINE COUNT
0236  3AD704                   LDA     PAGES      ;PAGE COUNT
0239  3C                       INR     A
023A  32D704                   STA     PAGES
023D  C9                       RET
                  ;
                  ; SEND MESSAGE TO CONSOLE
                  ;
023E  0E09       PRINT:        MVI     C,PBUF
0240  C30500                   JMP     BDOS
                  ;
                  ; GET NEXT BYTE FROM DISK BUFFER
                  ;
0243  3ADE04     GNB:          LDA     IBP
0246  FE80                     CPI     80H
0248  C24F02                   JNZ     READ
                  ;
                  ; READ ANOTHER BUFFER
                  ;
024B  CDDA02                   CALL    DISKR
024E  AF                       XRA     A
                  ;
                  ; READ THE BYTE AT BUFF+REG A
                  ;
024F  5F         READ:         MOV     E,A
0250  1600                     MVI     D,0
0252  3C                       INR     A
0253  32DE04                   STA     IBP
                  ; POINTER IS INCREMENTED
                  ; SAVE THE CURRENT FILE ADDRESS
0256  E5                       PUSH    H
0257  218000                   LXI     H,BUFF
025A  19                       DAD     D
025B  7E                       MOV     A,M
                  ; BYTE IS IN THE ACCUMULATOR
                  ; RESTORE FILE ADDRESS AND INCREMENT
025C  E1                       POP     H
025D  23                       INX     H
025E  C9                       RET
                  ;
                  ; GET A BYTE FROM MEMORY BUFFER
                  ;
025F  E5         GETB:         PUSH    H
0260  2ADC04                   LHLD    BUFFP
0263  7E                       MOV     A,M
0264  23                       INX     H
0265  22DC04                   SHLD    BUFFP
```

```
0268 E1                      POP     H
0269 E67F                    ANI     7FH      ;STRIP PARITY
026B FE1A                    CPI     EOF
026D C0                      RNZ
026E F1                      POP     PSW      ;RAISE STACK
                     ;
026F 3AD504                  LDA     FULL     ;CHECK FLAG
0272 B7                      ORA     A        ;ZERO?
0273 CA8E02                  JZ      FINIS    ;YES, DONE
0276 CD7C02                  CALL    RESET    ;POINTER
0279 C36401                  JMP     MAIN5    ;GET MORE
                     ;
                     ; RESET MEMORY POINTER
                     ;
027C E5              RESET:  PUSH    H
027D 210005                  LXI     H,BUFFER
0280 22DC04                  SHLD    BUFFP
0283 E1                      POP     H
0284 C9                      RET
                     ;
0285 110204          NONAME: LXI     D,MES1   ;POINT TO MESSAGE
0288 CD3E02          FINI3:  CALL    PRINT
028B C3AE02                  JMP     ABOR2
                     ;
                     ; NORMAL END OF OF LISTING
                     ;
028E 32D404          FINIS:  STA     EOFFL    ;SET EOF FLAG
                     ;
0291 CD1B02                  CALL    FILL     ;OUT PAGE
                     ;
                     ; ADD AN EXTRA PAGE IF THERE IS AN ODD NUMBER
                     ; AND P FLAG IS NOT SET
                     ;
0294 3AD904                  LDA     PFLAG
0297 B7                      ORA     A        ;ZERO?
0298 C2AE02                  JNZ     ABOR2    ;NO
029B 3AD704                  LDA     PAGES    ;HOW MANY?
029E E601                    ANI     1        ;ODD?
02A0 CAAE02                  JZ      ABOR2    ;NO
                     ;
                     ; ADD BLANK PAGE TO MAKE EVEN
                     ;
                     ; (CAN WE CALL FILL?)
02A3 0642                    MVI     B,LMAX   ;LINES
02A5 3E0A            EPAGE:  MVI     A,LF
02A7 CD0402                  CALL    PCHAR
02AA 05                      DCR     B
02AB C2A502                  JNZ     EPAGE
                     ;
                     ABOR2:
                     ABOR3:
02AE 2AE004                  LHLD    OLDSP    ;OLD STACK POINTER
02B1 F9                      SPHL
02B2 C9                      RET
                     ;
                     ; SETUP FILE AND OPEN FOR INPUT
                     ;
```

```
02B3 115C00    SETUP:  LXI     D,FCB
02B6 0E0F              MVI     C,OPENF
02B8 CD0500            CALL    BDOS
               ;
               ; CHECK FOR ERRORS
               ;
02BB FEFF              CPI     255
02BD CAC502            JZ      BADOPN  ;NO GOOD
               ;
               ; OPEN IS OK
               ;
02C0 AF                XRA     A
02C1 327C00            STA     FCBCR
02C4 C9               RET
               ;
               ; BAD OPEN
               ;
02C5 215D00    BADOPN: LXI     H,FCBFN ;1ST CHAR
02C8 7E                MOV     A,M     ;GET IT
02C9 FE20              CPI     ' '     ;FILE NAME?
02CB CA8502            JZ      NONAME  ;NO
02CE 213F24            LXI     H,'?$'  ;SET UP FOR PRINT
02D1 226800            SHLD    FCBRL   ;USE INPUT FILENAME
02D4 115D00            LXI     D,FCBFN ;FILENAME
02D7 C38802            JMP     FINI3   ;QUIT
               ;
               ; READ DISK FILE RECORD
               ;
02DA E5        DISKR:  PUSH    H
02DB D5                PUSH    D
02DC C5                PUSH    B
02DD 115C00            LXI     D,FCB
02E0 0E14              MVI     C,READF
02E2 CD0500            CALL    BDOS
02E5 C1                POP     B
02E6 D1                POP     D
02E7 E1                POP     H
02E8 B7                ORA     A       ;CHECK FOR ERRS
02E9 C8                RZ              ;OK
               ; MAY BE EOF
02EA FE01              CPI     1
02EC CAF502            JZ      FEND    ;EOF
               ;
02EF 111104            LXI     D,MES2
02F2 C3AE02            JMP     ABOR3
               ;
               ; FOUND DISK EOF
               ;
02F5 2ADC04    FEND:   LHLD    BUFFP   ;GET POINTER
02F8 361A              MVI     M,EOF   ;PUT IN 1A
02FA C3A101            JMP     MAIN3
               ;
               ; TAB COUNTER ROUTINE
               ; JUMP HERE WITH BYTE IN B
               ;
```

```
02FD 78          TABO:    MOV      A,B        ;GET BYTE
02FE FE20                 CPI      ' '        ;CONTROL CHAR?
0300 DA1E03               JC       TABCR      ;YES
0303 CD0903               CALL     TABN       ;INCR COUNTER
0306 C30302               JMP      OUTT       ;SEND BYTE
                 ;
                 ;  INCREMENT TAB COUNTER
                 ;  MAKE MODULO 8
                 ;
0309 3AD204      TABN:    LDA      TABC       ;GET TAB COUNT
030C 3C                   INR      A          ;INCREMENT IT
030D E607                 ANI      7          ;MODULO 8
030F 32D204               STA      TABC       ;SAVE IT
0312 C9                   RET
                 ;
                 ;  READ THE BYTE AFTER ABORT
                 ;
0313 CD1B02      DONE:    CALL     FILL       ;OUT PAGE
0316 0E01                 MVI      C,CONS     ;READ CONSOLE
0318 CD0500               CALL     BDOS
031B C3AE02               JMP      ABOR3      ;RETURN
                 ;
                 ;  IF CARRIAGE RETURN THEN ZERO COUNT
                 ;
031E FE0D        TABCR:   CPI      CR
0320 C23103               JNZ      TABI       ;NOT CR
0323 CDEA01               CALL     ABORT
0326 0F                   RRC                 ;KEY PRESSED?
0327 DA1303               JC       DONE       ;QUIT
032A AF                   XRA      A          ;GET A ZERO
032B 32D204               STA      TABC       ;SET TO ZERO
032E C30302               JMP      OUTT       ;SEND CR
                 ;
                 ;  CHECK FOR TAB (CONTROL-I)
                 ;
0331 FE09        TABI:    CPI      TAB
0333 C24003               JNZ      TFORM      ;NOT TAB
0336 CD5803      TAB2:    CALL     BLANK      ;SEND A BLANK
0339 CD0903               CALL     TABN       ;INCR TAB COUNT
033C C23603               JNZ      TAB2       ;MORE
033F C9                   RET                 ;NO PRINT
                 ;
                 ;  CHECK FOR FORMFEED
                 ;
0340 FE0C        TFORM:   CPI      FORMFD
0342 C20302               JNZ      OUTT       ;NO
0345 3AD804               LDA      FFLAG      ;FORM FEED OPTION?
0348 B7                   ORA      A
0349 C25403               JNZ      TFOR2      ;OTHER CONTROL
034C 060A                 MVI      B,LF
034E CD0302               CALL     OUTT
0351 C31B02               JMP      FILL       ;NORMAL FORMFEED
0354 F1         TFOR2:    POP      PSW        ;RESTORE STACK
0355 C3B901               JMP      GLOOP      ;NEXT BYTE
                 ;
                 ;  SEND A BLANK
                 ;
```

```
0358 3E20      BLANK:  MVI     A,' '
035A C30402            JMP     PCHAR   ;SEND IT
                ;
035D DBC4      CLOCK:  IN      ADATA   ;BOARD PRESENT?
035F FEFF              CPI     OFFH
0361 C8                RZ              ;NO
0362 3AD304            LDA     TIME2   ;PASS?
0365 B7                ORA     A       ;ZERO?
0366 C8                RZ              ;NOT 1ST
0367 AF                XRA     A
0368 32D304            STA     TIME2   ;SET 1ST
036B 21DE03            LXI     H,MON
036E CDA703            CALL    DATE    ;GET IT
0371 21ED03            LXI     H,HOUR
0374 CDC003            CALL    TIME
0377 21D703            LXI     H,PDATE ;POINT DATE/TIME
037A CD8A03            CALL    SEND
037D AF                XRA     A       ;GET A ZERO
037E 326900            STA     FCB+13  ;NAME END
0381 215D00            LXI     H,FCBFN ;NAME START
0384 CD8A03            CALL    SEND    ;SHOW
0387 21FF03            LXI     H,SCRLF
                ;
                ; SEND MESSAGE TO LIST
                ;
038A 7E        SEND:   MOV     A,M     ;GET BYTE
038B B7                ORA     A       ;ZERO AT END
038C C8                RZ              ;DONE
038D CD0402            CALL    PCHAR   ;SEND CHARACTER
0390 23                INX     H       ;INCREMENT POINTER
0391 C38A03            JMP     SEND
                ;
                ; READ A DIGIT
                ;
0394 7A        RDIGIT: MOV     A,D     ;SELECT DIGIT
0395 D3C4              OUT     ADATA
0397 DBC4              IN      ADATA   ;RESET INTERRUPT
0399 DBC5      DWAIT:  IN      ACONT   ;DIGIT PRESENT?
039B E680              ANI     80H
039D CA9903            JZ      DWAIT   ;LOOP UNTIL READY
03A0 DBC4              IN      ADATA   ;READ A DIGIT
03A2 E60F              ANI     OFH     ;MASK
03A4 F630              ORI     30H     ;CONVERT TO ASCII
03A6 C9                RET
                ;
                ;READ-DATE ROUTINE
                ;
03A7 AF        DATE:   XRA     A       ;DATE DISPLAY MODE
03A8 D3C6              OUT     BDATA
03AA 4F                MOV     C,A     ;THIS IS DATE
                ;
                ; READ FOUR DIGITS
                ;
03AB 1600      READ4:  MVI     D,0     ;SELECT FIRST DIGIT
03AD CD9403    RD4:    CALL    RDIGIT  ;DELAY ONE DIGIT SCAN
03B0 CDCD03            CALL    RSDIG   ;READ & STORE DIGIT
03B3 7A                MOV     A,D
03B4 FE20              CPI     20H     ;TWO DIGITS DONE?
```

```
03B6 C2BA03                JNZ      SKIP       ;SKIP A PLACE
03B9 23          SKIP:     INX      H          ;SKIP : OR /
03BA FE40        SKIP:     CPI      40H
03BC C2AD03                JNZ      RD4        ;GET ANOTHER DIGIT
03BF C9                    RET
                 ;
                 ; READ TIME & READ AND STORE DIGIT
                 ;
03C0 3E40        TIME:     MVI      A,40H      ;TIME DISPLAY MODE
03C2 D3C6                  OUT      BDATA
03C4 0E01                  MVI      C,1        ;THIS IS TIME
03C6 CDAB03                CALL     READ4      ;GET 4 DIGITS
03C9 23                    INX      H          ;SKIP COLON
03CA CDCD03                CALL     RSDIG
03CD CD9403      RSDIG:    CALL     RDIGIT
03D0 77                    MOV      M,A        ;STORE BYTE
03D1 23                    INX      H          ;INCR POINTER
03D2 7A                    MOV      A,D
03D3 C610                  ADI      10H
03D5 57                    MOV      D,A
03D6 C9                    RET
                 ;
                 ;STORAGE AREA
                 ;
                 PDATE:
03D7 0D0A446174            DB       CR,LF,'Date '
03DE 78782F      MON:      DB       'xx/'      ;MONTH
03E1 78782F                DB       'xx/'      ;DAY
03E4 3830                  DB       '80'       ;YEAR
03E6 202054696D            DB       ' Time '
03ED 78783A      HOUR:     DB       'xx:'      ;HOURS
03F0 78783A                DB       'xx:'      ;MINUTES
03F3 7878                  DB       'xx'       ;SECONDS
03F5 2020204669            DB       '  File: ',0
03FF 0D0A00      SCRLF:    DB       CR,LF,0
0402 0D0A4E6F20MES1:       DB       CR,LF,'No file name$'
0411 0D0A446973MES2:       DB       CR,LF,'Disk error$'
041E 0D0A        RULES:    DB       CR,LF
0420 50726F6772            DB       'Program to list ASCII files'
043B 0D0A204F70            DB       CR,LF,' Options:'
0446 202863686F            DB       ' (choose one)',CR,LF
0455 2020462061            DB       '  F adds form feeds',CR,LF
046A 2061502073            DB       '  P skips extra even page'
0483 2061742065            DB       ' at end',CR,LF
048C 2020446563            DB       '  Decimal number skips '
04A3 6C696E6573            DB       'lines at beginning',CR,LF,LF
04B8 2050726573            DB       ' Press any key to abort.'
04D0 0A24                  DB       LF,'$'
04D2 00          TABC:     DB       0          ;TAB COUNTER
04D3 80          TIME2:    DB       80H        ;PASS
04D4 FF          EOFFL:    DB       0FFH       ;EOF FLAG
04D5 00          FULL:     DB       0          ;FULL FLAG
04D6 02          LCOUNT:   DB       2          ;LINE COUNT
04D7 00          PAGES:    DB       0          ;PAGE COUNT
04D8 00          FFLAG:    DB       0          ;FORMFEED FLAG
04D9 00          PFLAG:    DB       0          ;EXTRA-PAGE FLAG
04DA 0000        SKIPB:    DW       0          ;LINES TO SKIP
04DC 0005        BUFFP:    DW       BUFFER     ;POINTER
04DE             IBP:      DS       2          ;INPUT BUFF POINTER
```

```
                         ;
                         ;       STACK AREA
04E0                     OLDSP:  DS      2       ;OLD STACK
04E2                             DS      30      ;STACK SPACE
                         STACK:                  ;NEW STACK
0500                     BUFFER: DS      1       ;MEMORY BUFFER
                         ;
0501                             END
```

LIST can be executed by the command

```
A>LIST <filename> <optional argument>
```

The CP/M system copies LIST into memory at 100 hex and branches to it. The first step is to save the incoming stack pointer and set up a new one. The clock routine is executed next. The routine shown in Listing 10.2 is written for a Computime R clock board, but the program can be altered to accommodate other methods of timekeeping. The first step of the clock routine is to see if there is a clock board in the computer. One of the clock ports, at address ADATA, is read. If there is no port at this I/O address, the computer will read a value of FF hex. This will harmlessly terminate the subroutine with a return instruction.

If a clock board is present, then the first line of the printer output will appear in the form

```
Date 06/15/80 Time 13:18:33    FILE: <filename>
```

The next step is to see if one of the three optional arguments was given after the filename. These arguments are:

F	(add form feeds)
P	(no extra page at end)
decimal number	(skip lines at beginning)

The letter F is used to insert form feeds every 58 lines of the listing. The command looks like this.

```
A>LIST SORT.PAS   F
```

This feature is useful for listing BASIC, FORTRAN, Pascal, or assembly-language source programs. If this argument is selected, the proper number of line feeds is generated as the end of the page is approached. This step causes the printer to skip over the fold in the paper. Also, any form feeds that are encountered are ignored.

If the letter P is given for the argument, then no extra blank page is generated at the end. This argument can be used to save paper when several one-page files are printed.

Another possible argument to LIST is a decimal number. In this case, the argument tells how many lines of the file are to be skipped. For example, the command

```
A>LIST LINFIT.FOR 500
```

will skip the first 500 lines and start the listing with line 501. Use this option if you want to print the last part of a long file but don't want to wait for the first part to be printed.

At this point, the disk directory is searched for the requested filename. This filename is retrieved from the file-control block at address 5C hex. If the requested filename can't be found in the directory, then the filename is printed on the console along with a question mark. LIST is then aborted. If no filename was entered, an error message stating this fact appears on the console. LIST is aborted in this case also. LIST could have been programmed to handle input errors the way that the GO routine does. Then, instead of aborting, LIST would ask for the filename to be entered again. The addition of this feature is left as an exercise for the reader.

If the filename exists in the directory, then the requested disk file is read. The proper number of lines are skipped over if the second argument of the command line was a valid decimal number. At this point, the disk file is read into memory. The FDOS address located at address 7 is checked to see how much memory is available. The entire file will be copied into memory if there is room. A check is made to see if the disk end-of-file character is encountered before the available memory is filled.

In either case, the date and time of day are printed first. Then the data in memory are printed. The first character is ignored if it is an ASCII form feed. This will prevent a page eject immediately after the date and time. The ASCII tab character is properly expanded by the routine TABO. The number of lines is counted. When a form-feed character is encountered, the proper number of line feeds is issued to fill out the page. If the F argument was given, the form feeds will be automatically issued.

LIST can be aborted at any time during the printing by pressing any console key. The console is checked for this after each carriage return. The CP/M program DUMP is set up a little differently. The disk data are read into a 128-byte buffer, rather than into the memory area above 100 hex. Using a small buffer has the advantage that programs can be stored in memory during the DUMP operation and they will not be erased. But, in return, there is a lot of disk activity. The disk must be accessed every 128 bytes.

COPY A DISK FILE INTO MEMORY

If you have programmed one of the tape routines given in Chapter 8, then you can make backup copies of your disk files. But you have to first copy the disk file into memory. The copy step can be performed with the debugger DDT or SID.

```
A>SID <filename>
```

This command loads the debugger at address 100 hex and branches to it. The debugger relocates itself into high memory, then copies the requested disk file into memory starting at 100 hex. The address of the end of the disk file in memory is printed in hexadecimal. This address can be used in conjunction with the memory map given in Appendix B to determine the number of 256-byte blocks in the file. For example, if DDT gives a value of 13AF, then the disk file occupies 19 (decimal) blocks of 256 bytes.

When the file has been copied into memory, the G command in the debugger can be used to branch to the tape routine. Then the SAVE command can be given to make a copy on tape. The process can be reversed by loading the file into memory from tape. Branch to address zero to restart CP/M. Finally, give the SAVE command

```
A>SAVE XX <filename>
```

where XX is the decimal number of 256-byte blocks to be saved.

This procedure can be simplified by using the FETCH program given in Listing 10.3. FETCH uses CP/M for all I/O and disk operations, so it should work with all standard CP/M systems. There are, however, 2 items that need to be customized. Fetch is initially loaded into memory at 100 hex. It then automatically relocates itself to higher memory. The relocation address is chosen to be F400 hex in Listing 10.3. You may have to change it to some other address if this region is not available. The address is defined by the label ORIGIN in the source program. After FETCH copies the requested disk file into memory, it branches to your tape routine. This address, defined by the label MONIT, is chosen to be F000 hex in Listing 10.3 MONIT should be changed to your tape address.

Listing 10.3. Copy a disk file into memory.

```
              ; (date goes here)
              ;
              TITLE    'Copy a disk file into memory.'
              ;
              ; THIS PROGRAM RELOCATES ITSELF TO HIGH MEMORY THEN
              ; COPIES A DISK FILE TO MEMORY STARTING AT 100 HEX.
              ; ASCII AND COM FILES ARE CORRECTLY HANDLED.
              ; GIVE A THIRD ARGUMENT OF B FOR OTHER BINARY FILES.
              ; A 1A EOF CHARACTER IS PUT AT THE END ASCII FILES.
              ; THE LAST ADDRESS AND DECIMAL BLOCK SIZE ARE GIVEN.
              ; FINALLY A JUMP IS MADE TO THE ADDRESS OF MONIT.
              ;
              ; QUITS IF NO READ-WRITE MEMORY AT NEW LOCATION
              ;
F000 =        MONIT    EQU     0F000H   ;GO HERE WHEN DONE
F400 =        ORIGIN   EQU     0F400H   ;RELOCATE FETCH HERE
              ;
0100 =        BUFFER   EQU     100H     ;START MEMORY BUFFER
0005 =        BDOS     EQU     5        ;DOS ENTRY POINT
```

```
0002 =              TYPEF   EQU     2        ;CONSOLE OUTPUT
0009 =              PBUF    EQU     9        ;PRINT CONSOLE BUFFER
000F =              OPENF   EQU     15       ;FILE OPEN
0014 =              READF   EQU     20       ;READ FUNCTION
000D =              CR      EQU     0DH      ;CARRIAGE RETURN
000A =              LF      EQU     0AH      ;LINE FEED
001A =              EOF     EQU     1AH      ;END OF FILE
                    ;
005C =              FCB     EQU     5CH      ;FILE CONTROL BLOCK
0080 =              BUFF    EQU     80H      ;INPUT DISK BUFFER ADDR
                    ;
                    ;
                    ; FILE CONTROL BLOCK DEFINITIONS
                    ;
005D =              FCBFN   EQU     FCB+1    ;FILE NAME
0065 =              FCBFT   EQU     FCB+9    ;FILE TYPE
0068 =              FCBRL   EQU     FCB+12   ;CURRENT REEL #
007C =              FCBCR   EQU     FCB+32   ;NEXT REC # (0-127)
                    ;
0100                ORG     100H
                    ;
                    ; SAVE OLD STACK AND SET UP NEW STACK
                    ;
0100 210000  BEGIN: LXI     H,0      ;ZERO HL
0103 39             DAD     SP       ;ADD IN STACK
0104 22AEF5         SHLD    OLDSP    ;SAVE STACK
0107 31C8F5         LXI     SP,STACK ;DEFINE NEW STACK
010A 210001         LXI     H,BUFFER
010D 22A9F5         SHLD    BUFFP    ;MEMORY POINTER
                    ;
                    ; BLOCK MOVE REST OF PROGRAM
                    ;
0110 112A01         LXI     D,OLDST  ;OLD START
0113 2100F4         LXI     H,START  ;NEW START
0116 01AC01         LXI     B,IBP-START ;LENGTH
0119 1A      LOOP:  LDAX    D        ;GET BYTE
011A 77             MOV     M,A      ;MOVE TO NEW
011B BE             CMP     M        ;CHECK MEMORY
011C C20000         JNZ     0        ;QUIT, BAD
011F 23             INX     H        ;INCREMENT
0120 13             INX     D        ; POINTERS
0121 0B             DCX     B        ;DECR COUNT
0122 78             MOV     A,B      ;SEE IF DONE
0123 B1             ORA     C        ;ALL MOVED?
0124 C21901         JNZ     LOOP     ;NO
0127 C300F4         JMP     START    ;DONE
                    ;
                    ;ORIGINAL START OF PROGRAM
                    ;
                    OLDST:
                    ;
F400                ORG     ORIGIN
                    ;
F400 C346F4  START: JMP     MAIN     ;FINAL START
F403 CD0BF4  FINIS: CALL    CRLF
F406 2AAEF5         LHLD    OLDSP    ;ORIGINAL STACK
F409 F9             SPHL
F40A C9             RET
```

```
                        ;
       F40B 3E0D        CRLF:   MVI     A,CR
       F40D CD12F4              CALL    PCHAR
       F410 3E0A               MVI     A,LF
                        ;
                        ; OUTPUT A CHARACTER FROM A
                        ;
       F412 E5          PCHAR:  PUSH    H
       F413 D5                  PUSH    D
       F414 C5                  PUSH    B           ;SAVED
       F415 0E02               MVI     C,TYPEF
       F417 5F                 MOV     E,A
       F418 CD0500             CALL    BDOS
       F41B C1                 POP     B
       F41C D1                 POP     D
       F41D E1                 POP     H           ;RESTORED
       F41E C9                 RET
                        ;
                        ; CARRIAGE RET, LINE FEED AND PRINT
                        ;
       F41F CD0BF4      PRINTC: CALL    CRLF
                        ;
                        ; PRINT BUFFER UNTIL $ FOUND
                        ;
       F422 E5          PRINT:  PUSH    H
       F423 0E09               MVI     C,PBUF
       F425 CD0500             CALL    BDOS
       F428 E1                 POP     H
       F429 C9                 RET
                        ;
                        ; GET NEXT BYTE FROM DISK BUFFER
                        ;
       F42A 3AACF5      GNB:    LDA     IBP
       F42D FE80               CPI     80H
       F42F C236F4             JNZ     GO
                        ;
                        ; READ ANOTHER BUFFER
                        ;
       F432 CD35F5             CALL    DISKR
       F435 AF                 XRA     A
                        ;
                        ; READ THE BYTE AT BUFF+REG A
                        ;
       F436 5F          GO:     MOV     E,A
       F437 1600               MVI     D,0
       F439 3C                 INR     A
       F43A 32ACF5             STA     IBP
                        ; POINTER IS INCREMENTED
                        ; SAVE THE CURRENT FILE ADDRESS
       F43D E5                 PUSH    H
       F43E 218000             LXI     H,BUFF
       F441 19                 DAD     D
       F442 7E                 MOV     A,M
                        ; BYTE IS IN THE ACCUMULATOR
                        ; RESTORE FILE ADDRESS AND INCREMENT
       F443 E1                 POP     H
       F444 23                 INX     H
       F445 C9                 RET
```

```
                         ;
                         MAIN:
                         ;
                         ; READ BYTES FROM DISK AND PUT IN MEMORY
                         ;
F446 CDD6F4                      CALL    SETUP     ;SET UP INPUT FILE
F449 3E80                        MVI     A,80H
F44B 32ACF5                      STA     IBP       ;BUFFER POINTER TO 80H
                         ;
F44E CD2AF4      MAIN2:          CALL    GNB       ;GET A BYTE
F451 E5                          PUSH    H
F452 2AA9F5                      LHLD    BUFFP     ;MEMORY POINTER
F455 77                          MOV     M,A       ;PUT BYTE IN
F456 23                          INX     H
F457 22A9F5                      SHLD    BUFFP     ;SAVE POINTER
F45A 47                          MOV     B,A
F45B 3EFF                        MVI     A,0FFH
F45D BD                          CMP     L         ;L=0?
F45E C26AF4                      JNZ     MAIN4     ;NO
F461 3A0700                      LDA     7         ;FDOS
F464 D60A                        SUI     10        ;CCP -1
F466 BC                          CMP     H         ;TOO BIG?
F467 DA2FF5                      JC      TOOBIG    ;WON'T FIT
                         ;
F46A E1          MAIN4:          POP     H
F46B 3AABF5                      LDA     BFLAG     ;BINARY FILE?
F46E B7                          ORA     A
F46F C24EF4                      JNZ     MAIN2     ;YES
F472 78                          MOV     A,B       ;GET BYTE
F473 FE1A                        CPI     EOF
F475 C24EF4                      JNZ     MAIN2     ;NO
F478 2AA9F5                      LHLD    BUFFP     ;POINTER
F47B 2B          MAIN5:          DCX     H
F47C 118AF5      DONE:           LXI     D,MESA
F47F CD22F4                      CALL    PRINT
F482 CDBDF4                      CALL    OUTHL     ;PRINT IT
F485 1199F5                      LXI     D,MESB
F488 CD22F4                      CALL    PRINT
                         ;
                         ; CONVERT FILE LENGTH TO DECIMAL K
                         ;
F48B 7C                          MOV     A,H
F48C 2600                        MVI     H,0       ;LEADING 0 FLAG
F48E 1664                        MVI     D,100
F490 0E2F        HM3:            MVI     C,'0'-1
F492 0C          HM2:            INR     C
F493 92                          SUB     D         ;100/10
F494 D292F4                      JNC     HM2       ;STILL PLUS
F497 82                          ADD     D         ;ADD BACK
F498 47                          MOV     B,A       ;SAVE REMAINDER
F499 79                          MOV     A,C       ;GET 100S/TENS
                         ;
                         ; SUPPRESS LEADING ZEROS
                         ;
F49A FE31                        CPI     '1'       ;LESS THAN 1?
F49C D2A5F4                      JNC     HM4       ;NO
F49F 7C                          MOV     A,H       ;CHECK FLAG
F4A0 B7                          ORA     A         ;ZERO?
```

```
F4A1  79                    MOV     A,C         ;RESTORE BYTE
F4A2  CAAAF4                JZ      HM5         ;IF LEADING 0
F4A5  CD12F4       HM4:     CALL    PCHAR       ;1ST, 2ND DIGIT
F4A8  26FF                  MVI     H,0FFH      ;SET FLAG
F4AA  7A           HM5:     MOV     A,D
F4AB  D65A                  SUI     90          ;100 TO 10
F4AD  57                    MOV     D,A
F4AE  78                    MOV     A,B
F4AF  D290F4                JNC     HM3         ;ONCEMORE
F4B2  C630                  ADI     '0'         ;ASCII BIAS
F4B4  CD12F4                CALL    PCHAR       ;3RD DIGIT
F4B7  CD0BF4                CALL    CRLF
F4BA  C300F0                JMP     MONIT       ;DONE
                   ;
                   ; CONVERT BINARY IN H,L TO ASCII HEX
                   ;
F4BD  4C           OUTHL:   MOV     C,H
F4BE  CDC2F4                CALL    OUTHX
F4C1  4D                    MOV     C,L
F4C2  79           OUTHX:   MOV     A,C
F4C3  1F                    RAR
F4C4  1F                    RAR
F4C5  1F                    RAR
F4C6  1F                    RAR
F4C7  CDCBF4                CALL    HEX1
F4CA  79                    MOV     A,C
F4CB  E60F         HEX1:    ANI     0FH         ;OUTPUT HEX BYTE
F4CD  C690                  ADI     90H
F4CF  27                    DAA                 ;INTEL DAA TRICK
F4D0  CE40                  ACI     40H
F4D2  27                    DAA
F4D3  C312F4                JMP     PCHAR
                   ;
                   ; SETUP FILE AND OPEN FOR INPUT
                   ; CHECK FOR BINARY FILE
                   ;
F4D6  AF           SETUP:   XRA     A           ;ZERO
F4D7  32ABF5                STA     BFLAG       ;NOT BINARY FILE
F4DA  2A6500                LHLD    FCBFT       ;FILE TYPE
F4DD  7D                    MOV     A,L         ;1ST CHAR
F4DE  FE43                  CPI     'C'
F4E0  C200F5                JNZ     BINCH       ;NO
F4E3  7C                    MOV     A,H         ;SECOND CHAR
F4E4  FE4F                  CPI     'O'
F4E6  C200F5                JNZ     BINCH       ;NO
F4E9  3E1A         OPN2:    MVI     A,EOF       ;SET FLAG
F4EB  32ADF5                STA     BFLAG
                   ;
                   ; SETUP FILE AND OPEN FOR INPUT
                   ;
F4EE  115C00       OPN3:    LXI     D,FCB
F4F1  0E0F                  MVI     C,OPENF
F4F3  CD0500                CALL    BDOS
                   ;
                   ; CHECK FOR ERRORS
                   ;
F4F6  FEFF                  CPI     255
F4F8  CA0EF5                JZ      BADOPN      ;NO GOOD
```

```
                       ;
                       ; OPEN IS OK
                       ;
F4FB AF                     XRA     A
F4FC 327C00                 STA     FCBCR
F4FF C9                     RET
                       ;
                       ; B FOR THIRD ARGUMENT MEANS BINARY FILE
                       ;
F500 216D00    BINCH:  LXI     H,6DH
F503 7E                     MOV     A,M        ;GET THIRD ARGUMENT
F504 E657                   ANI     57H        ;LOWER TO UPPER
F506 FE42                   CPI     'B'
F508 C2EEF4                 JNZ     OPN3       ;NOT BINARY
F50B C3E9F4                 JMP     OPN2       ;BINARY
                       ;
                       ; BAD OPEN
                       ;
F50E 215D00    BADOPN: LXI     H,FCBFN    ;1ST CHAR
F511 7E                     MOV     A,M        ;GET IT
F512 FE20                   CPI     ' '        ;FILE NAME?
F514 CA26F5                 JZ      NONAME     ;NO
F517 213F24                 LXI     H,'?$'     ;SET UP FOR PRINT
F51A 226800                 SHLD    FCBRL      ;USE INPUT FILENAME
F51D 115D00                 LXI     D,FCBFN    ;FILENAME
F520 CD22F4                 CALL    PRINT
F523 C303F4                 JMP     FINIS      ;QUIT
                       ;
F526 1162F5    NONAME: LXI     D,MES1     ;POINT TO MESSAGE
F529 CD1FF4    NONAM2: CALL    PRINTC
F52C C303F4                 JMP     FINIS
                       ;
F52F 117AF5    TOOBIG: LXI     D,MES4
F532 C329F5                 JMP     NONAM2
                       ;
                       ; READ DISK FILE RECORD
                       ;
F535 E5        DISKR:  PUSH    H
F536 D5                     PUSH    D
F537 C5                     PUSH    B
F538 115C00                 LXI     D,FCB
F53B 0E14                   MVI     C,READF
F53D CD0500                 CALL    BDOS
F540 C1                     POP     B
F541 D1                     POP     D
F542 E1                     POP     H
F543 B7                     ORA     A          ;CHECK FOR ERRS
F544 C8                     RZ                 ;OK
                       ;
                       ; MAY BE EOF
                       ;
F545 FE01                   CPI     1
F547 CA53F5                 JZ      FEND       ;EOF
                       ;
                       ; INCORRECT FILE NAME
                       ;
F54A 116FF5                 LXI     D,MES2
F54D CD1FF4                 CALL    PRINTC
F550 C303F4                 JMP     FINIS
```

```
                        ;
                        ; FOUND DISK EOF
                        ;
F553 2AA9F5    FEND:    LHLD    BUFFP     ;GET POINTER
F556 3AABF5             LDA     BFLAG     ;COM FILE?
F559 B7                 ORA     A
F55A C27BF4             JNZ     MAIN5     ;YES
F55D 361A               MVI     M,EOF     ;PUT EOF
F55F C37CF4             JMP     DONE
                        ;
                        ;STORAGE AREA
                        ;
F562 4E6F206669 MES1:   DB      'No file name$'
F56F 4469736B20 MES2:   DB      'Disk error$'
F57A 46696C6520 MES4:   DB      'File is too big$'
F58A 4C61737420 MESA:   DB      'Last address: $'
F599 206865782C MESB:   DB      ' hex,  Blocks: $'
F5A9 0001       BUFFP:  DW      BUFFER    ;POINTER
                        ;
F5AB            BFLAG:  DS      1         ;BINARY FLAG
F5AC            IBP:    DS      2         ;INPUT BUFF POINTER
                        ;
                        ;    STACK AREA
                        ;
F5AE            OLDSP:  DS      2         ;OLD STACK
F5B0                    DS      24        ;STACK SPACE
                STACK:
                        ;
F5C8                    END
```

One of the advantages of FETCH is that it is considerably smaller than DDT or SID. In addition, the decimal number of blocks to be saved and the last address of the program are given. FETCH is executed just like the debugger.

```
A>FETCH <filename>.<extension>
```

The CP/M system loads FETCH at 100 hex and then branches to it. The instructions at the beginning of FETCH are used to relocate the rest of the program into a preselected memory area. A jump is then made to the relocated FETCH.

FETCH loads the selected disk file into memory starting at 100 hex. An ASCII file is copied up to the 1A end-of-file mark. Typical extension names include the following.

ASM	(assembly language)
PAS	(Pascal)
FOR	(FORTRAN)
BAS	(BASIC)
HEX	(hex-encoded binary)
TEX	(text formatter)
LIB	(library)
MAC	(assembly language)

Executable binary files will have a file extension of COM; the entire file will be copied in this case. If a nonexecutable binary file is loaded, an additional argument of B (for binary) must be given.

```
FETCH  SORT.REL  B
```

Examples of executable binary files are

> REL   (relocatable)
> INT   (intermediate)

Relocatable files generated by the Microsoft assembler, and the FORTRAN, COBOL, and BASIC compiler are of this type. Intermediate files are produced by CBASIC.

After the disk file is loaded, FETCH prints two numbers. One number is the memory address of the end of the file expressed in hex. The other number is the size of the file. The number of 256-byte blocks is printed, in decimal.

Type up the program given in the listing. Assemble it and load it into memory with the debugger

```
A>DDT  FETCH.HEX
```

The debugger will load the move routine, the first part of FETCH, into memory at 100 hex. The main part of the program, however, will be loaded at the address of ORIGIN, 0F400 hex in this case. Use the debugger to move the main part of FETCH back down to the beginning of the user area.

```
MF400  F5FF  12A
```

Now, return to the CP/M system with a control-C and save the combination of the move program and the main part of FETCH.

```
A>SAVE 2 FETCH.COM
```

FETCH is now ready for use.

Appendixes

APPENDIX A

The ASCII Character Set

The ASCII character set is listed in numerical order with the corresponding decimal, hexadecimal, and octal values. The control characters are indicated with a caret (^). For example, the horizontal tab (HT) is formed with a control-I.

	decim	hex	octal				decim	hex	octal
NUL	0	00	000	^@	Null	@	64	40	100
SOH	1	01	001	^A	Start of heading	A	65	41	101
STX	2	02	002	^B	Start of text	B	66	42	102
ETX	3	03	003	^C	End of text	C	67	43	103
EOT	4	04	004	^D	End of transmission	D	68	44	104
ENQ	5	05	005	^E	Enquiry	E	69	45	105
ACK	6	06	006	^F	Acknowledge	F	70	46	106
BEL	7	07	007	^G	Bell	G	71	47	107
BS	8	08	010	^H	Backspace	H	72	48	110
HT	9	09	011	^I	Horizontal tab	I	73	49	111
LF	10	0A	012	^J	Line feed	J	74	4A	112
VT	11	0B	013	^K	Vertical tab	K	75	4B	113
FF	12	0C	014	^L	Form feed	L	76	4C	114
CR	13	0D	015	^M	Carriage return	M	77	4D	115
SO	14	0E	016	^N	Shift out	N	78	4E	116
SI	15	0F	017	^O	Shift in	O	79	4F	117
DLE	16	10	020	^P	Data link escape	P	80	50	120
DC1	17	11	021	^Q	Device control 1	Q	81	51	121
DC2	18	12	022	^R	Device control 2	R	82	52	122
DC3	19	13	023	^S	Device control 3	S	83	53	123
DC4	20	14	024	^T	Device control 4	T	84	54	124
NAK	21	15	025	^U	Negative acknowledge	U	85	55	125
SYN	22	16	026	^V	Synchronous idle	V	86	56	126
ETB	23	17	027	^W	End transmission block	W	87	57	127
CAN	24	18	030	^X	Cancel	X	88	58	130
EM	25	19	031	^Y	End of medium	Y	89	59	131
SUB	26	1A	032	^Z	Substitute	Z	90	5A	132
ESC	27	1B	033	^[	Escape	[	91	5B	133
FS	28	1C	034	^\	File separator	\	92	5C	134
GS	29	1D	035	^]	Group separator	]	93	5D	135
RS	30	1E	036	^^	Record separator	^	94	5E	136
US	31	1F	037	^_	Unit separator	_	95	5F	137

```
==========================        ==================
SP   32    20    040   Space      `     96    60    140
 !   33    21    041              a     97    61    141
 "   34    22    042              b     98    62    142
 #   35    23    043              c     99    63    143
 $   36    24    044              d    100    64    144
 %   37    25    045              e    101    65    145
 &   38    26    046              f    102    66    146
 '   39    27    047              g    103    67    147
==================                ==================
 (   40    28    050              h    104    68    150
 )   41    29    051              i    105    69    151
 *   42    2A    052              j    106    6A    152
 +   43    2B    053              k    107    6B    153
 ,   44    2C    054              l    108    6C    154
 -   45    2D    055              m    109    6D    155
 .   46    2E    056              n    110    6E    156
 /   47    2F    057              o    111    6F    157
==================                ==================
 0   48    30    060              p    112    70    160
 1   49    31    061              q    113    71    161
 2   50    32    062              r    114    72    162
 3   51    33    063              s    115    73    163
 4   52    34    064              t    116    74    164
 5   53    35    065              u    117    75    165
 6   54    36    066              v    118    76    166
 7   55    37    067              w    119    77    167
==================                ==================
 8   56    38    070              x    120    78    170
 9   57    39    071              y    121    79    171
 :   58    3A    072              z    122    7A    172
 ;   59    3B    073              {    123    7B    173
 <   60    3C    074              |    124    7C    174
 =   61    3D    075              }    125    7D    175
 >   62    3E    076              ~    126    7E    176
 ?   63    3F    077            DEL  127    7F    177   Delete
==================                ==========================
```

APPENDIX B
A 64K Memory Map

The 8080 and Z-80 microprocessors can directly address 64K bytes of memory. The memory area is mapped out in the chart that follows. Each entry represents a 256-byte block. The high-order byte of the address is given in hex then in octal. For example, the first entry of the second column is:

```
20    040      32
```

This represents an address range of 2000 to 2FFF hex, or 040-000 to 040-777 octal. The third column gives the decimal number of 1K blocks. The fourth column is the decimal number of 256-byte blocks starting at the address 100 hex. As an example, suppose that a CP/M program runs from 100 hex to 3035 hex. The 30 hex entry in the table shows that the program contains 48 decimal blocks of 256-byte size. The program can be saved with the CP/M command:

```
A>SAVE 48  filename
```

As another example, if you have two, 16K memory boards starting at address zero, then your top of memory is located at address 7FFF hex.

Hex	Oct	K	Bl	Hex	Oct	K	Bl	Hex	Oct	K	Bl	Hex	Oct	K	Bl
00	000		0	20	040		32	40	100		64	60	140		96
01	001		1	21	041		33	41	101		65	61	141		97
02	002		2	22	042		34	42	102		66	62	142		98
03	003	1	3	23	043	9	35	43	103	17	67	63	143	25	99
04	004		4	24	044		36	44	104		68	64	144		100
05	005		5	25	045		37	45	105		69	65	145		101
06	006		6	26	046		38	46	106		70	66	146		102
07	007	2	7	27	047	10	39	47	107	18	71	67	147	26	103
08	010		8	28	050		40	48	110		72	68	150		104
09	011		9	29	051		41	49	111		73	69	151		105
0A	012		10	2A	052		42	4A	112		74	6A	152		106
0B	013	3	11	2B	053	11	43	4B	113	19	75	6B	153	27	107
0C	014		12	2C	054		44	4C	114		76	6C	154		108
0D	015		13	2D	055		45	4D	115		77	6D	155		109
0E	016		14	2E	056		46	4E	116		78	6E	156		110
0F	017	4	15	2F	057	12	47	4F	117	20	79	6F	157	28	111
10	020		16	30	060		48	50	120		80	70	160		112
11	021		17	31	061		49	51	121		81	71	161		113
12	022		18	32	062		50	52	122		82	72	162		114
13	023	5	19	33	063	13	51	53	123	21	83	73	163	29	115
14	024		20	34	064		52	54	124		84	74	164		116
15	025		21	35	065		53	55	125		85	75	165		117
16	026		22	36	066		54	56	126		86	76	166		118
17	027	6	23	37	067	14	55	57	127	22	87	77	167	30	119
18	030		24	38	070		56	58	130		88	78	170		120
19	031		25	39	071		57	59	131		89	79	171		121
1A	032		26	3A	072		58	5A	132		90	7A	172		122
1B	033	7	27	3B	073	15	59	5B	133	23	91	7B	173	31	123
1C	034		28	3C	074		60	5C	134		92	7C	174		124
1D	035		29	3D	075		61	5D	135		93	7D	175		125
1E	036		30	3E	076		62	5E	136		94	7E	176		126
1F	037	8	31	3F	077	16	63	5F	137	24	95	7F	177	32	127

Hex	Oct	K	Bl	Hex	Oct	K	Bl	Hex	Oct	K	Bl	Hex	Oct	K	Bl
80	200		128	A0	240		160	C0	300		192	E0	340		224
81	201		129	A1	241		161	C1	301		193	E1	341		225
82	202		130	A2	242		162	C2	302		194	E2	342		226
83	203	33	131	A3	243	41	163	C3	303	49	195	E3	343	57	227
84	204		132	A4	244		164	C4	304		196	E4	344		228
85	205		133	A5	245		165	C5	305		197	E5	345		229
86	206		134	A6	246		166	C6	306		198	E6	346		230
87	207	34	135	A7	247	42	167	C7	307	50	199	E7	347	58	231
88	210		136	A8	250		168	C8	310		200	E8	350		232
89	211		137	A9	251		169	C9	311		201	E9	151		233
8A	212		138	AA	252		170	CA	312		202	EA	352		234
8B	213	35	139	AB	253	43	171	CB	313	51	203	EB	353	59	235
8C	214		140	AC	254		172	CC	314		204	EC	354		236
8D	215		141	AD	255		173	CD	315		205	ED	355		237
8E	216		142	AE	256		174	CE	316		206	EE	356		238
8F	217	36	143	AF	257	44	175	CF	317	52	207	EF	357	60	239
90	220		144	B0	260		176	D0	320		208	F0	360		240
91	221		145	B1	261		177	D1	321		209	F1	361		241
92	222		146	B2	262		178	D2	322		210	F2	362		242
93	223	37	147	B3	263	45	179	D3	323	53	211	F3	363	61	243
94	224		148	B4	264		180	D4	324		212	F4	364		244
95	225		149	B5	265		181	D5	325		213	F5	365		245
96	226		150	B6	266		182	D6	326		214	F6	366		246
97	227	38	151	B7	267	46	183	D7	327	54	215	F7	367	62	247
98	230		152	B8	270		184	D8	330		216	F8	370		248
99	231		153	B9	271		185	D9	331		217	F9	371		249
9A	232		154	BA	272		186	DA	332		218	FA	372		250
9B	233	39	155	BB	273	47	187	DB	333	55	219	FB	373	63	251
9C	234		156	BC	274		188	DC	334		220	FC	374		252
9D	235		157	BD	275		189	DD	335		221	FD	375		253
9E	236		158	BE	276		190	DE	336		222	FE	376		254
9F	237	40	159	BF	227	48	191	DF	337	56	223	FF	377	64	255

APPENDIX C

The 8080 Instruction Set
(Alphabetic)

The 8080 instruction set is listed alphabetically with the corresponding hexadecimal code. The following representations apply.

<div align="center">

nn   8-bit argument

nnnn   16-bit argument

</div>

Hex		Mnemonic		Hex		Mnemonic	
CE	nn	ACI	nn	2F		CMA	
8F		ADC	A	3F		CMC	
88		ADC	B	BF		CMP	A
89		ADC	C	B8		CMP	B
8A		ADC	D	B9		CMP	C
8B		ADC	E	BA		CMP	D
8C		ADC	H	BB		CMP	E
8D		ADC	L	BC		CMP	H
8E		ADC	M	BD		CMP	L
87		ADD	A	BE		CMP	M
80		ADD	B	D4	nnnn	CNC	nnnn
81		ADD	C	C4	nnnn	CNZ	nnnn
82		ADD	D	F4	nnnn	CP	nnnn
83		ADD	E	EC	nnnn	CPE	nnnn
84		ADD	H	FE	nn	CPI	nn
85		ADD	L	E4	nnnn	CPO	nnnn
86		ADD	M	CC	nnnn	CZ	nnnn
C6	nn	ADI	nn	27		DAA	
A7		ANA	A	09		DAD	B
A0		ANA	B	19		DAD	D
A1		ANA	C	29		DAD	H
A2		ANA	D	39		DAD	SP
A3		ANA	E	3D		DCR	A
A4		ANA	H	05		DCR	B
A5		ANA	L	0D		DCR	C
A6		ANA	M	15		DCR	D
E6	nn	ANI	nn	1D		DCR	E
CD	nnnn	CALL	nnnn	25		DCR	H
DC	nnnn	CC	nnnn	2D		DCR	L
FC	nnnn	CM	nnnn	35		DCR	M

Hex		Mnemonic		Hex	Mnemonic	
0B		DCX	B	43	MOV	B,E
1B		DCX	D	44	MOV	B,H
2B		DCX	H	45	MOV	B,L
3B		DCX	SP	46	MOV	B,M
F3		DI		4F	MOV	C,A
FB		EI		48	MOV	C,B
76		HLT		49	MOV	C,C
DB	nn	IN	nn	4A	MOV	C,D
3C		INR	A	4B	MOV	C,E
04		INR	B	4C	MOV	C,H
0C		INR	C	4D	MOV	C,L
14		INR	D	4E	MOV	C,M
1C		INR	E	57	MOV	D,A
24		INR	H	50	MOV	D,B
2C		INR	L	51	MOV	D,C
34		INR	M	52	MOV	D,D
03		INX	B	53	MOV	D,E
13		INX	D	54	MOV	D,H
23		INX	H	55	MOV	D,L
33		INX	SP	56	MOV	D,M
DA	nnnn	JC	nnnn	5F	MOV	E,A
FA	nnnn	JM	nnnn	58	MOV	E,B
C3	nnnn	JMP	nnnn	59	MOV	E,C
D2	nnnn	JNC	nnnn	5A	MOV	E,D
C2	nnnn	JNZ	nnnn	5B	MOV	E,E
F2	nnnn	JP	nnnn	5C	MOV	E,H
EA	nnnn	JPE	nnnn	5D	MOV	E,L
E2	nnnn	JPO	nnnn	5E	MOV	E,M
CA	nnnn	JZ	nnnn	67	MOV	H,A
3A	nnnn	LDA	nnnn	60	MOV	H,B
0A		LDAX	B	61	MOV	H,C
1A		LDAX	D	62	MOV	H,D
2A	nnnn	LHLD	nnnn	63	MOV	H,E
01	nnnn	LXI	B, nnnn	64	MOV	H,H
11	nnnn	LXI	D, nnnn	65	MOV	H,L
21	nnnn	LXI	H, nnnn	66	MOV	H,M
31	nnnn	LXI	SP, nnnn	6F	MOV	L,A
7F		MOV	A,A	68	MOV	L,B
78		MOV	A,B	69	MOV	L,C
79		MOV	A,C	6A	MOV	L,D
7A		MOV	A,D	6B	MOV	L,E
7B		MOV	A,E	6C	MOV	L,H
7C		MOV	A,H	6D	MOV	L,L
7D		MOV	A,L	6E	MOV	L,M
7E		MOV	A,M	77	MOV	M,A
47		MOV	B,A	70	MOV	M,B
40		MOV	B,B	71	MOV	M,C
41		MOV	B,C	72	MOV	M,D
42		MOV	B,D	73	MOV	M,E

Hex		Mnemonic		Hex		Mnemonic	
74		MOV	M,H	CF		RST	1
75		MOV	M,L	D7		RST	2
3E	nn	MVI	A, nn	DF		RST	3
06	nn	MVI	B, nn	E7		RST	4
0E	nn	MVI	C, nn	EF		RST	5
16	nn	MVI	D, nn	F7		RST	6
1E	nn	MVI	E, nn	FF		RST	7
26	nn	MVI	H, nn	C8		RZ	
2E	nn	MVI	L, nn	9F		SBB	A
36	nn	MVI	M, nn	98		SBB	B
00		NOP		99		SBB	C
B7		ORA	A	9A		SBB	D
B0		ORA	B	9B		SBB	E
B1		ORA	C	9C		SBB	H
B2		ORA	D	9D		SBB	L
B3		ORA	E	9E		SBB	M
B4		ORA	H	DE	nn	SBI	nn
B5		ORA	L	22	nnnn	SHLD	nnnn
B6		ORA	M	F9		SPHL	
F6	nn	ORI	nn	32	nnnn	STA	nnnn
D3	nn	OUT	nn	37		STC	
E9		PCHL		02		STAX	B
C1		POP	B	12		STAX	D
D1		POP	D	97		SUB	A
E1		POP	H	90		SUB	B
F1		POP	PSW	91		SUB	C
C5		PUSH	B	92		SUB	D
D5		PUSH	D	93		SUB	E
E5		PUSH	H	94		SUB	H
F5		PUSH	PSW	95		SUB	L
17		RAL		96		SUB	M
1F		RAR		D6	nn	SUI	nn
D8		RC		EB		XCHG	
C9		RET		AF		XRA	A
07		RLC		A8		XRA	B
F8		RM		A9		XRA	C
D0		RNC		AA		XRA	D
C0		RNZ		AB		XRA	E
F0		RP		AC		XRA	H
E8		RPE		AD		XRA	L
E0		RPO		AE		XRA	M
0F		RRC		EE	nn	XRI	nn
C7		RST	0	E3		XTHL	

The 8080 Instruction Set
(Numeric)

The 8080 instruction set is listed alphabetically with the corresponding hexadecimal code. The following representations apply.

nn 8-bit argument
nnnn 16-bit argument

Hex		Mnemonic		Hex		Mnemonic	
00		NOP		1E	nn	MVI	E, nn
01	nnnn	LXI	B, nnnn	1F		RAR	
02		STAX	B	20		(not used)	
03		INX	B	21	nnnn	LXI	H, nnnn
04		INR	B	22	nnnn	SHLD	nnnn
05		DCR	B	23		INX	H
06	nn	MVI	B, nn	24		INR	H
07		RLC		25		DCR	H
08		(not used)		26	nn	MVI	H, nn
09		DAD	B	27		DAA	
0A		LDAX	B	28		(not used)	
0B		DCX	B	29		DAD	H
0C		INR	C	2A	nnnn	LHLD	nnnn
0D		DCR	C	2B		DCX	H
0E	nn	MVI	C, nn	2C		INR	L
0F		RRC		2D		DCR	L
10		(not used)		2E	nn	MVI	L, nn
11	nnnn	LXI	D, nnnn	2F		CMA	
12		STAX	D	30		(not used)	
13		INX	D	31	nnnn	LXI	SP, nnnn
14		INR	D	32	nnnn	STA	nnnn
15		DCR	D	33		INX	SP
16	nn	MVI	D, nn	34		INR	M
17		RAL		35		DCR	M
18		(not used)		36	nn	MVI	M, nn
19		DAD	D	37		STC	
1A		LDAX	D	38		(not used)	
1B		DCX	D	39		DAD	SP
1C		INR	E	3A	nnnn	LDA	nnnn
1D		DCR	E	3B		DCX	SP

Hex		Mnemonic		Hex		Mnemonic	
3C		INR	A	6D		MOV	L,L
3D		DCR	A	6E		MOV	L,M
3E	nn	MVI	A, nn	6F		MOV	L,A
3F		CMC		70		MOV	M,B
40		MOV	B,B	71		MOV	M,C
41		MOV	B,C	72		MOV	M,D
42		MOV	B,D	73		MOV	M,E
43		MOV	B,E	74		MOV	M,H
44		MOV	B,H	75		MOV	M,L
45		MOV	B,L	76		HLT	
46		MOV	B,M	77		MOV	M,A
47		MOV	B,A	78		MOV	A,B
48		MOV	C,B	79		MOV	A,C
49		MOV	C,C	7A		MOV	A,D
4A		MOV	C,D	7B		MOV	A,E
4B		MOV	C,E	7C		MOV	A,H
4C		MOV	C,H	7D		MOV	A,L
4D		MOV	C,L	7E		MOV	A,M
4E		MOV	C,M	7F		MOV	A,A
4F		MOV	C,A	80		ADD	B
50		MOV	D,B	81		ADD	C
51		MOV	D,C	82		ADD	D
52		MOV	D,D	83		ADD	E
53		MOV	D,E	84		ADD	H
54		MOV	D,H	85		ADD	L
55		MOV	D,L	86		ADD	M
56		MOV	D,M	87		ADD	A
57		MOV	D,A	88		ADC	B
58		MOV	E,B	89		ADC	C
59		MOV	E,C	8A		ADC	D
5A		MOV	E,D	8B		ADC	E
5B		MOV	E,E	8C		ADC	H
5C		MOV	E,H	8D		ADC	L
5D		MOV	E,L	8E		ADC	M
5E		MOV	E,M	8F		ADC	A
5F		MOV	E,A	90		SUB	B
60		MOV	H,B	91		SUB	C
61		MOV	H,C	92		SUB	D
62		MOV	H,D	93		SUB	E
63		MOV	H,E	94		SUB	H
64		MOV	H,H	95		SUB	L
65		MOV	H,L	96		SUB	M
66		MOV	H,M	97		SUB	A
67		MOV	H,A	98		SBB	B
68		MOV	L,B	99		SBB	C
69		MOV	L,C	9A		SBB	D
6A		MOV	L,D	9B		SBB	E
6B		MOV	L,E	9C		SBB	H
6C		MOV	L,H	9D		SBB	L

Hex		Mnemonic		Hex		Mnemonic	
9E		SBB	M	CF		RST	1
9F		SBB	A	D0		RNC	
A0		ANA	B	D1		POP	D
A1		ANA	C	D2	nnnn	JNC	nnnn
A2		ANA	D	D3	nn	OUT	nn
A3		ANA	E	D4	nnnn	CNC	nnnn
A4		ANA	H	D5		PUSH	D
A5		ANA	L	D6	nn	SUI	nn
A6		ANA	M	D7		RST	2
A7		ANA	A	D8		RC	
A8		XRA	B	D9		(not used)	
A9		XRA	C	DA	nnnn	JC	nnnn
AA		XRA	D	DB	nn	IN	nn
AB		XRA	E	DC	nnnn	CC	nnnn
AC		XRA	H	DD		(not used)	
AD		XRA	L	DE	nn	SBI	nn
AE		XRA	M	DF		RST	3
AF		XRA	A	E0		RPO	
B0		ORA	B	E1		POP	H
B1		ORA	C	E2	nnnn	JPO	nnnn
B2		ORA	D	E3		XTHL	
B3		ORA	E	E4	nnnn	CPO	nnnn
B4		ORA	H	E5		PUSH	H
B5		ORA	L	E6	nn	ANI	nn
B6		ORA	M	E7		RST	4
B7		ORA	A	E8		RPE	
B8		CMP	B	E9		PCHL	
B9		CMP	C	EA	nnnn	JPE	nnnn
BA		CMP	D	EB		XCHG	
BB		CMP	E	EC	nnnn	CPE	nnnn
BC		CMP	H	ED		(not used)	
BD		CMP	L	EE	nn	XRI	nn
BE		CMP	M	EF		RST	5
BF		CMP	A	F0		RP	
C0		RNZ		F1		POP	PSW
C1		POP	B	F2	nnnn	JP	nnnn
C2	nnnn	JNZ	nnnn	F3		DI	
C3	nnnn	JMP	nnnn	F4	nnnn	CP	nnnn
C4	nnnn	CNZ	nnnn	F5		PUSH	PSW
C5		PUSH	B	F6	nn	ORI	nn
C6	nn	ADI	nn	F7		RST	6
C7		RST	0	F8		RM	
C8		RZ		F9		SPHL	
C9		RET		FA	nnnn	JM	nnnn
CA	nnnn	JZ	nnnn	FB		EI	
CB		(not used)		FC	nnnn	CM	nnnn
CC	nnnn	CZ	nnnn	FD		(not used)	
CD	nnnn	CALL	nnnn	FE	nn	CPI	nn
CE	nn	ACI	nn	FF		RST	7

The Z-80 Instruction Set
(Alphabetic)

The Zilog Z-80 instruction set is listed alphabetically with the corresponding hexadecimal values. The following representations apply.

nn	8-bit arguments
nnnn	16-bit arguments
dd	8-bit signed displacement
*	instructions common to the 8080

Hex		Mnemonic		Hex		Mnemonic	
8E	*	ADC	A,(HL)	19	*	ADD	HL,DE
DD 8Edd		ADC	A,(IX+dd)	29	*	ADD	HL,HL
FD 8Edd		ADC	A,(IY+dd)	39	*	ADD	HL,SP
8F	*	ADC	A,A	DD 09		ADD	IX,BC
88	*	ADC	A,B	DD 19		ADD	IX,DE
89	*	ADC	A,C	DD 29		ADD	IX,IX
8A	*	ADC	A,D	DD 39		ADD	IX,SP
8B	*	ADC	A,E	FD 09		ADD	IY,BC
8C	*	ADC	A,H	FD 19		ADD	IY,DE
8D	*	ADC	A,L	FD 29		ADD	IY,IY
CE nn	*	ADC	A, nn	FD 39		ADD	IY,SP
ED 4A		ADC	HL,BC	A6	*	AND	(HL)
ED 5A		ADC	HL,DE	DD A6dd		AND	(IX+dd)
ED 6A		ADC	HL,HL	FD A6dd		AND	(IY+dd)
ED 7A		ADC	HL,SP	A7	*	AND	A
86	*	ADD	A,(HL)	A0	*	AND	B
DD 86dd		ADD	A,(IX+dd)	A1	*	AND	C
FD 86dd		ADD	A,(IY+dd)	A2	*	AND	D
87	*	ADD	A,A	A3	*	AND	E
80	*	ADD	A,B	A4	*	AND	H
81	*	ADD	A,C	A5	*	AND	L
82	*	ADD	A,D	E6 nn	*	AND	nn
83	*	ADD	A,E	CB 46		BIT	0,(HL)
84	*	ADD	A,H	DD CBdd46		BIT	0,(IX+dd)
85	*	ADD	A,L	FD CBdd46		BIT	0,(IY+dd)
C6 nn	*	ADD	A, nn	CB 47		BIT	0,A
09	*	ADD	HL,BC	CB 40		BIT	0,B

Hex		Mnemonic		Hex		Mnemonic	
CB 41		BIT	0,C	CB 68		BIT	5,B
CB 42		BIT	0,D	CB 69		BIT	5,C
CB 43		BIT	0,E	CB 6A		BIT	5,D
CB 44		BIT	0,H	CB 6B		BIT	5,E
CB 45		BIT	0,L	CB 6C		BIT	5,H
CB 4E		BIT	1,(HL)	CB 6D		BIT	5,L
DD CBdd4E		BIT	1,(IX+dd)	CB 76		BIT	6,(HL)
FD CBdd4E		BIT	1,(IY+dd)	DD CBdd76		BIT	6,(IX+dd)
CB 4F		BIT	1,A	FD CBdd76		BIT	6,(IY+dd)
CB 48		BIT	1,B	CB 77		BIT	6,A
CB 49		BIT	1,C	CB 70		BIT	6,B
CB 4A		BIT	1,D	CB 71		BIT	6,C
CB 4B		BIT	1,E	CB 72		BIT	6,D
CB 4C		BIT	1,H	CB 73		BIT	6,E
CB 4D		BIT	1,L	CB 74		BIT	6,H
CB 56		BIT	2,(HL)	CB 75		BIT	6,L
DD CBdd56		BIT	2,(IX+dd)	CB 7E		BIT	7,(HL)
FD CBdd56		BIT	2,(IY+dd)	DD CBdd7E		BIT	7,(IX+dd)
CB 57		BIT	2,A	FD CBdd7E		BIT	7,(IY+dd)
CB 50		BIT	2,B	CB 7F		BIT	7,A
CB 51		BIT	2,C	CB 78		BIT	7,B
CB 52		BIT	2,D	CB 79		BIT	7,C
CB 53		BIT	2,E	CB 7A		BIT	7,D
CB 54		BIT	2,H	CB 7B		BIT	7,E
CB 55		BIT	2,L	CB 7C		BIT	7,H
CB 5E		BIT	3,(HL)	CB 7D		BIT	7,L
DD CBdd5E		BIT	3,(IX+dd)	DC nnnn	*	CALL	C, nnnn
FD CBdd5E		BIT	3,(IY+dd)	FC nnnn	*	CALL	M, nnnn
CB 5F		BIT	3,A	D4 nnnn	*	CALL	NC, nnnn
CB 58		BIT	3,B	CD nnnn	*	CALL	nnnn
CB 59		BIT	3,C	C4 nnnn	*	CALL	NZ, nnnn
CB 5A		BIT	3,D	F4 nnnn	*	CALL	P, nnnn
CB 5B		BIT	3,E	EC nnnn	*	CALL	PE, nnnn
CB 5C		BIT	3,H	E4 nnnn	*	CALL	PO, nnnn
CB 5D		BIT	3,L	CC nnnn	*	CALL	Z, nnnn
CB 66		BIT	4,(HL)	3F	*	CCF	
DD CBdd66		BIT	4,(IX+dd)	BE	*	CP	(HL)
FD CBdd66		BIT	4,(IY+dd)	DD BEdd		CP	(IX+dd)
CB 67		BIT	4,A	FD BEdd		CP	(IY+dd)
CB 60		BIT	4,B	BF	*	CP	A
CB 61		BIT	4,C	B8	*	CP	B
CB 62		BIT	4,D	B9	*	CP	C
CB 63		BIT	4,E	BA	*	CP	D
CB 64		BIT	4,H	BB	*	CP	E
CB 65		BIT	4,L	BC	*	CP	H
CB 6E		BIT	5,(HL)	BD	*	CP	L
DD CBdd6E		BIT	5,(IX+dd)	FE nn	*	CP	nn
FD CBdd6E		BIT	5,(IY+dd)	ED A9		CPD	
CB 6F		BIT	5,A	ED B9		CPDR	

Hex		Mnemonic		Hex		Mnemonic	
ED A1		CPI		13	*	INC	DE
ED B1		CPIR		1C	*	INC	E
2F	*	CPL		24	*	INC	H
27	*	DAA		23	*	INC	HL
35	*	DEC	(HL)	DD 23		INC	IX
DD 35dd		DEC	(IX+dd)	FD 23		INC	IY
FD 35dd		DEC	(IY+dd)	2C	*	INC	L
3D	*	DEC	A	33	*	INC	SP
05	*	DEC	B	ED AA		IND	
0B	*	DEC	BC	ED BA		INDR	
0D	*	DEC	C	ED A2		INI	
15	*	DEC	D	ED B2		INIR	
1B	*	DEC	DE	E9	*	JP	(HL)
1D	*	DEC	E	DD E9		JP	(IX)
25	*	DEC	H	FD E9		JP	(IY)
2B	*	DEC	HL	DA nnnn	*	JP	C, nnnn
DD 2B		DEC	IX	FA nnnn	*	JP	M, nnnn
FD 2B		DEC	IY	D2 nnnn	*	JP	NC, nnnn
2D	*	DEC	L	C3 nnnn	*	JP	nnnn
3B	*	DEC	SP	C2 nnnn	*	JP	NZ, nnnn
F3	*	DI		F2 nnnn	*	JP	P, nnnn
10 dd		DJNZ	dd	EA nnnn	*	JP	PE, nnnn
FB	*	EI		E2 nnnn	*	JP	PO, nnnn
E3	*	EX	(SP),HL	CA nnnn	*	JP	Z, nnnn
DD E3		EX	(SP),IX	38 dd		JR	C, dd
FD E3		EX	(SP),IY	18 dd		JR	dd
08		EX	AF,AF'	30 dd		JR	NC, dd
EB	*	EX	DE,HL	20 dd		JR	NZ, dd
D9		EXX		28 dd		JR	Z, dd
76	*	HALT		02	*	LD	(BC),A
ED 46		IM	0	12	*	LD	(DE),A
ED 56		IM	1	77	*	LD	(HL),A
ED 5E		IM	2	70	*	LD	(HL),B
ED 78		IN	A,(C)	71	*	LD	(HL),C
DB nn	*	IN	A,(nn)	72	*	LD	(HL),D
ED 40		IN	B,(C)	73	*	LD	(HL),E
ED 48		IN	C,(C)	74	*	LD	(HL),H
ED 50		IN	D,(C)	75	*	LD	(HL),L
ED 58		IN	E,(C)	36 nn	*	LD	(HL), nn
ED 60		IN	H,(C)	DD 77dd		LD	(IX+dd),A
ED 68		IN	L,(C)	DD 70dd		LD	(IX+dd),B
34	*	INC	(HL)	DD 71dd		LD	(IX+dd),C
DD 34dd		INC	(IX+dd)	DD 72dd		LD	(IX+dd),D
FD 34dd		INC	(IY+dd)	DD 73dd		LD	(IX+dd),E
3C	*	INC	A	DD 74dd		LD	(IX+dd),H
04	*	INC	B	DD 75dd		LD	(IX+dd),L
03	*	INC	BC	DD 36ddnn		LD	(IX+dd), nn
0C	*	INC	C	FD 77dd		LD	(IY+dd),A
14	*	INC	D	FD 70dd		LD	(IY+dd),B

Hex		Mnemonic		Hex		Mnemonic
FD 71dd		LD (IY+dd),C		4B	*	LD C,E
FD 72dd		LD (IY+dd),D		4C	*	LD C,H
FD 73dd		LD (IY+dd),E		4D	*	LD C,L
FD 74dd		LD (IY+dd),H		0E nn	*	LD C, nn
FD 75dd		LD (IY+dd),L		56	*	LD D,(HL)
FD 36ddnn		LD (IY+dd), nn		DD 56dd		LD D,(IX+dd)
32 nnnn	*	LD (nnnn),A		FD 56dd		LD D,(IY+dd)
ED 43nnnn		LD (nnnn),BC		57	*	LD D,A
ED 53nnnn		LD (nnnn),DE		50	*	LD D,B
22 nnnn	*	LD (nnnn),HL		51	*	LD D,C
DD 22nnnn		LD (nnnn),IX		52	*	LD D,D
FD 22nnnn		LD (nnnn),IY		53	*	LD D,E
ED 73nnnn		LD (nnnn),SP		54	*	LD D,H
0A	*	LD A,(BC)		55	*	LD D,L
1A	*	LD A,(DE)		16 nn	*	LD D, nn
7E	*	LD A,(HL)		ED 5Bnnnn		LD DE, (nnnn)
DD 7Edd		LD A,(IX+dd)		11 nnnn	*	LD DE, nnnn
FD 7Edd		LD A,(IY+dd)		5E	*	LD E,(HL)
3A nnnn	*	LD A, (nnnn)		DD 5Edd		LD E,(IX+dd)
7F	*	LD A,A		FD 5Edd		LD E,(IY+dd)
78	*	LD A,B		5F	*	LD E,A
79	*	LD A,C		58	*	LD E,B
7A	*	LD A,D		59	*	LD E,C
7B	*	LD A,E		5A	*	LD E,D
7C	*	LD A,H		5B	*	LD E,E
ED 57		LD A,I		5C	*	LD E,H
7D	*	LD A,L		5D	*	LD E,L
3E nn	*	LD A, nn		1E nn	*	LD E, nn
ED 5F		LD A,R		66	*	LD H,(HL)
46	*	LD B,(HL)		DD 66dd		LD H,(IX+dd)
DD 46dd		LD B,(IX+dd)		FD 66dd		LD H,(IY+dd)
FD 46dd		LD B,(IY+dd)		67	*	LD H,A
47	*	LD B,A		60	*	LD H,B
40	*	LD B,B		61	*	LD H,C
41	*	LD B,C		62	*	LD H,D
42	*	LD B,D		63	*	LD H,E
43	*	LD B,E		64	*	LD H,H
44	*	LD B,H		65	*	LD H,L
45	*	LD B,L		26 nn	*	LD H, nn
06 nn	*	LD B, nn		2A nnnn	*	LD HL, (nnnn)
ED 4Bnnnn		LD BC, (nnnn)		21 nnnn	*	LD HL, nnnn
01 nnnn	*	LD BC, nnnn		ED 47		LD I,A
4E	*	LD C,(HL)		DD 2Annnn		LD IX, (nnnn)
DD 4Edd		LD C,(IX+dd)		DD 21nnnn		LD IX, nnnn
FD 4Edd		LD C,(IY+dd)		FD 2Annnn		LD IY, (nnnn)
4F	*	LD C,A		FD 21nnnn		LD IY, nnnn
48	*	LD C,B		6E	*	LD L,(HL)
49	*	LD C,C		DD 6Edd		LD L,(IX+dd)
4A	*	LD C,D		FD 6Edd		LD L,(IY+dd)

Hex			Mnemonic	Hex			Mnemonic
6F	*	LD	L,A	F5	*	PUSH	AF
68	*	LD	L,B	C5	*	PUSH	BC
69	*	LD	L,C	D5	*	PUSH	DE
6A	*	LD	L,D	E5	*	PUSH	HL
6B	*	LD	L,E	DD E5		PUSH	IX
6C	*	LD	L,H	FD E5		PUSH	IY
6D	*	LD	L,L	CB 86		RES	0,(HL)
2E nn	*	LD	L, nn	DD CBdd86		RES	0,(IX+dd)
ED 4F		LD	R,A	FD CBdd86		RES	0,(IY+dd)
ED 7Bnnnn		LD	SP, (nnnn)	CB 87		RES	0,A
F9	*	LD	SP,HL	CB 80		RES	0,B
DD F9		LD	SP,IX	CB 81		RES	0,C
FD F9		LD	SP,IY	CB 82		RES	0,D
31 nnnn	*	LD	SP, nnnn	CB 83		RES	0,E
ED A8		LDD		CB 84		RES	0,H
ED B8		LDDR		CB 85		RES	0,L
ED A0		LDI		CB 8E		RES	1,(HL)
ED B0		LDIR		DD CBdd8E		RES	1,(IX+dd)
ED 44		NEG		FD CBdd8E		RES	1,(IY+dd)
00	*	NOP		CB 8F		RES	1,A
B6	*	OR	(HL)	CB 88		RES	1,B
DD B6dd		OR	(IX+dd)	CB 89		RES	1,C
FD B6dd		OR	(IY+dd)	CB 8A		RES	1,D
B7	*	OR	A	CB 8B		RES	1,E
B0	*	OR	B	CB 8C		RES	1,H
B1	*	OR	C	CB 8D		RES	1,L
B2	*	OR	D	CB 96		RES	2,(HL)
B3	*	OR	E	DD CBdd96		RES	2,(IX+dd)
B4	*	OR	H	FD CBdd96		RES	2,(IY+dd)
B5	*	OR	L	CB 97		RES	2,A
F6 nn	*	OR	nn	CB 90		RES	2,B
ED BB		OTDR		CB 91		RES	2,C
ED B3		OTIR		CB 92		RES	2,D
ED 79		OUT	(C),A	CB 93		RES	2,E
ED 41		OUT	(C),B	CB 94		RES	2,H
ED 49		OUT	(C),C	CB 95		RES	2,L
ED 51		OUT	(C),D	CB 9E		RES	3,(HL)
ED 59		OUT	(C),E	DD CBdd9E		RES	3,(IX+dd)
ED 61		OUT	(C),H	FD CBdd9E		RES	3,(IY+dd)
ED 69		OUT	(C),L	CB 9F		RES	3,A
D3 nn	*	OUT	(nn),A	CB 98		RES	3,B
ED AB		OUTD		CB 99		RES	3,C
ED A3		OUTI		CB 9A		RES	3,D
F1	*	POP	AF	CB 9B		RES	3,E
C1	*	POP	BC	CB 9C		RES	3,H
D1	*	POP	DE	CB 9D		RES	3,L
E1	*	POP	HL	CB A6		RES	4,(HL)
DD E1		POP	IX	DD CBddA6		RES	4,(IX+dd)
FD E1		POP	IY	FD CBddA6		RES	4,(IY+dd)

Hex		Mnemonic		Hex		Mnemonic	
CB A7		RES	4,A	DD CBdd16		RL	(IX+dd)
CB A0		RES	4,B	FD CBdd16		RL	(IY+dd)
CB A1		RES	4,C	CB 17		RL	A
CB A2		RES	4,D	CB 10		RL	B
CB A3		RES	4,E	CB 11		RL	C
CB A4		RES	4,H	CB 12		RL	D
CB A5		RES	4,L	CB 13		RL	E
CB AE		RES	5,(HL)	CB 14		RL	H
DD CBddAE		RES	5,(IX+dd)	CB 15		RL	L
FD CBddAE		RES	5,(IY+dd)	17	*	RLA	
CB AF		RES	5,A	CB 06		RLC	(HL)
CB A8		RES	5,B	DD CBdd06		RLC	(IX+dd)
CB A9		RES	5,C	FD CBdd06		RLC	(IY+dd)
CB AA		RES	5,D	CB 07		RLC	A
CB AB		RES	5,E	CB 00		RLC	B
CB AC		RES	5,H	CB 01		RLC	C
CB AD		RES	5,L	CB 02		RLC	D
CB B6		RES	6,(HL)	CB 03		RLC	E
DD CBddB6		RES	6,(IX+dd)	CB 04		RLC	H
FD CBddB6		RES	6,(IY+dd)	CB 05		RLC	L
CB B7		RES	6,A	07	*	RLCA	
CB B0		RES	6,B	ED 6F		RLD	
CB B1		RES	6,C	CB 1E		RR	(HL)
CB B2		RES	6,D	DD CBdd1E		RR	(IX+dd)
CB B3		RES	6,E	FD CBdd1E		RR	(IY+dd)
CB B4		RES	6,H	CB 1F		RR	A
CB B5		RES	6,L	CB 18		RR	B
CB BE		RES	7,(HL)	CB 19		RR	C
DD CBddBE		RES	7,(IX+dd)	CB 1A		RR	D
FD CBddBE		RES	7,(IY+dd)	CB 1B		RR	E
CB BF		RES	7,A	CB 1C		RR	H
CB B8		RES	7,B	CB 1D		RR	L
CB B9		RES	7,C	1F	*	RRA	
CB BA		RES	7,D	CB 0E		RRC	(HL)
CB BB		RES	7,E	DD CBdd0E		RRC	(IX+dd)
CB BC		RES	7,H	FD CBdd0E		RRC	(IY+dd)
CB BD		RES	7,L	CB 0F		RRC	A
C9	*	RET		CB 08		RRC	B
D8	*	RET	C	CB 09		RRC	C
F8	*	RET	M	CB 0A		RRC	D
D0	*	RET	NC	CB 0B		RRC	E
C0	*	RET	NZ	CB 0C		RRC	H
F0	*	RET	P	CB 0D		RRC	L
E8	*	RET	PE	0F	*	RRCA	
E0	*	RET	PO	ED 67		RRD	
C8	*	RET	Z	C7	*	RST	0
ED 4D		RETI		CF	*	RST	8
ED 45		RETN		D7	*	RST	10H
CB 16		RL	(HL)	DF	*	RST	18H

Hex		Mnemonic		Hex	Mnemonic	
E7	*	RST	20H	CB D5	SET	2,L
EF	*	RST	28H	CB DE	SET	3,(HL)
F7	*	RST	30H	DD CBddDE	SET	3,(IX+dd)
FF	*	RST	38H	FD CBddDE	SET	3,(IY+dd)
9E	*	SBC	A,(HL)	CB DF	SET	3,A
DD 9Edd		SBC	A,(IX+dd)	CB D8	SET	3,B
FD 9Edd		SBC	A,(IY+dd)	CB D9	SET	3,C
9F	*	SBC	A,A	CB DA	SET	3,D
98	*	SBC	A,B	CB DB	SET	3,E
99	*	SBC	A,C	CB DC	SET	3,H
9A	*	SBC	A,D	CB DD	SET	3,L
9B	*	SBC	A,E	CB E6	SET	4,(HL)
9C	*	SBC	A,H	DD CBddE6	SET	4,(IX+dd)
9D	*	SBC	A,L	FD CBddE6	SET	4,(IY+dd)
DE nn	*	SBC	A, nn	CB E7	SET	4,A
ED 42		SBC	HL,BC	CB E0	SET	4,B
ED 52		SBC	HL,DE	CB E1	SET	4,C
ED 62		SBC	HL,HL	CB E2	SET	4,D
ED 72		SBC	HL,SP	CB E3	SET	4,E
37	*	SCF		CB E4	SET	4,H
CB C6		SET	0,(HL)	CB E5	SET	4,L
DD CBddC6		SET	0,(IX+dd)	CB EE	SET	5,(HL)
FD CBddC6		SET	0,(IY+dd)	DD CBddEE	SET	5,(IX+dd)
CB C7		SET	0,A	FD CBddEE	SET	5,(IY+dd)
CB C0		SET	0,B	CB EF	SET	5,A
CB C1		SET	0,C	CB E8	SET	5,B
CB C2		SET	0,D	CB E9	SET	5,C
CB C3		SET	0,E	CB EA	SET	5,D
CB C4		SET	0,H	CB EB	SET	5,E
CB C5		SET	0,L	CB EC	SET	5,H
CB CE		SET	1,(HL)	CB ED	SET	5,L
DD CBddCE		SET	1,(IX+dd)	CB F6	SET	6,(HL)
FD CBddCE		SET	1,(IY+dd)	DD CBddF6	SET	6,(IX+dd)
CB CF		SET	1,A	FD CBddF6	SET	6,(IY+dd)
CB C8		SET	1,B	CB F7	SET	6,A
CB C9		SET	1,C	CB F0	SET	6,B
CB CA		SET	1,D	CB F1	SET	6,C
CB CB		SET	1,E	CB F2	SET	6,D
CB CC		SET	1,H	CB F3	SET	6,E
CB CD		SET	1,L	CB F4	SET	6,H
CB D6		SET	2,(HL)	CB F5	SET	6,L
DD CBddD6		SET	2,(IX+dd)	CB FE	SET	7,(HL)
FD CBddD6		SET	2,(IY+dd)	DD CBddFE	SET	7,(IX+dd)
CB D7		SET	2,A	FD CBddFE	SET	7,(IY+dd)
CB D0		SET	2,B	CB FF	SET	7,A
CB D1		SET	2,C	CB F8	SET	7,B
CB D2		SET	2,D	CB F9	SET	7,C
CB D3		SET	2,E	CB FA	SET	7,D
CB D4		SET	2,H	CB FB	SET	7,E

Hex		Mnemonic		Hex			Mnemonic	
CB	FC	SET	7,H	CB	39		SRL	C
CB	FD	SET	7,L	CB	3A		SRL	D
CB	26	SLA	(HL)	CB	3B		SRL	E
DD	CBdd26	SLA	(IX+dd)	CB	3C		SRL	H
FD	CBdd26	SLA	(IY+dd)	CB	3D		SRL	L
CB	27	SLA	A	96		*	SUB	(HL)
CB	20	SLA	B	DD	96dd		SUB	(IX+dd)
CB	21	SLA	C	FD	96dd		SUB	(IY+dd)
CB	22	SLA	D	97		*	SUB	A
CB	23	SLA	E	90		*	SUB	B
CB	24	SLA	H	91		*	SUB	C
CB	25	SLA	L	92		*	SUB	D
CB	2E	SRA	(HL)	93		*	SUB	E
DD	CBdd2E	SRA	(IX+dd)	94		*	SUB	H
FD	CBdd2E	SRA	(IY+dd)	95		*	SUB	L
CB	2F	SRA	A	D6	nn	*	SUB	nn
CB	28	SRA	B	AE		*	XOR	(HL)
CB	29	SRA	C	DD	AEdd		XOR	(IX+dd)
CB	2A	SRA	D	FD	AEdd		XOR	(IY+dd)
CB	2B	SRA	E	AF		*	XOR	A
CB	2C	SRA	H	A8		*	XOR	B
CB	2D	SRA	L	A9		*	XOR	C
CB	3E	SRL	(HL)	AA		*	XOR	D
DD	CBdd3E	SRL	(IX+dd)	AB		*	XOR	E
FD	CBdd3E	SRL	(IY+dd)	AC		*	XOR	H
CB	3F	SRL	A	AD		*	XOR	L
CB	38	SRL	B	EE	nn	*	XOR	nn

The Z-80 Instruction Set
(Numeric)

The Zilog Z-80 instruction set is listed numerically with the corresponding hexadecimal values. The following representations apply.

nn	8-bit argument
nnnn	16-bit argument
dd	8-bit signed displacement
*	instructions common to the 8080

Hex			Mnemonic		Hex			Mnemonic	
00		*	NOP		1C		*	INC	E
01	nnnn	*	LD	BC, nnnn	1D		*	DEC	E
02		*	LD	(BC),A	1E	nn	*	LD	E, nn
03		*	INC	BC	1F		*	RRA	
04		*	INC	B	20	dd		JR	NZ, dd
05		*	DEC	B	21	nnnn	*	LD	HL, nnnn
06	nn	*	LD	B, nn	22	nnnn	*	LD	(nnnn),HL
07		*	RLCA		23		*	INC	HL
08			EX	AF,AF'	24		*	INC	H
09		*	ADD	HL,BC	25		*	DEC	H
0A		*	LD	A,(BC)	26	nn	*	LD	H, nn
0B		*	DEC	BC	27		*	DAA	
0C		*	INC	C	28	dd		JR	Z, dd
0D		*	DEC	C	29		*.	ADD	HL,HL
0E	nn	*	LD	C, nn	2A	nnnn	*	LD	HL, (nnnn)
0F		*	RRCA		2B		*	DEC	HL
10	dd		DJNZ	dd	2C		*	INC	L
11	nnnn	*	LD	DE, nnnn	2D		*	DEC	L
12		*	LD	(DE),A	2E	nn	*	LD	L, nn
13		*	INC	DE	2F		*	CPL	
14		*	INC	D	30	dd		JR	NC, dd
15		*	DEC	D	31	nnnn	*	LD	SP, nnnn
16	nn	*	LD	D, nn	32	nnnn	*	LD	(nnnn),A
17		*	RLA		33		*	INC	SP
18	dd		JR	dd	34		*	INC	(HL)
19		*	ADD	HL,DE	35		*	DEC	(HL)
1A		*	LD	A,(DE)	36	nn	*	LD	(HL), nn
1B		*	DEC	DE	37		*	SCF	

Hex		Mnemonic		Hex		Mnemonic	
38 dd		JR	C, dd	69	*	LD	L,C
39	*	ADD	HL,SP	6A	*	LD	L,D
3A nnnn	*	LD	A, (nnnn)	6B	*	LD	L,E
3B	*	DEC	SP	6C	*	LD	L,H
3C	*	INC	A	6D	*	LD	L,L
3D	*	DEC	A	6E	*	LD	L,(HL)
3E nn	*	LD	A, nn	6F	*	LD	L,A
3F	*	CCF		70	*	LD	(HL),B
40	*	LD	B,B	71	*	LD	(HL),C
41	*	LD	B,C	72	*	LD	(HL),D
42	*	LD	B,D	73	*	LD	(HL),E
43	*	LD	B,E	74	*	LD	(HL),H
44	*	LD	B,H	75	*	LD	(HL),L
45	*	LD	B,L	76	*	HALT	
46	*	LD	B,(HL)	77	*	LD	(HL),A
47	*	LD	B,A	78	*	LD	A,B
48	*	LD	C,B	79	*	LD	A,C
49	*	LD	C,C	7A	*	LD	A,D
4A	*	LD	C,D	7B	*	LD	A,E
4B	*	LD	C,E	7C	*	LD	A,H
4C	*	LD	C,H	7D	*	LD	A,L
4D	*	LD	C,L	7E	*	LD	A,(HL)
4E	*	LD	C,(HL)	7F	*	LD	A,A
4F	*	LD	C,A	80	*	ADD	A,B
50	*	LD	D,B	81	*	ADD	A,C
51	*	LD	D,C	82	*	ADD	A,D
52	*	LD	D,D	83	*	ADD	A,E
53	*	LD	D,E	84	*	ADD	A,H
54	*	LD	D,H	85	*	ADD	A,L
55	*	LD	D,L	86	*	ADD	A,(HL)
56	*	LD	D,(HL)	87	*	ADD	A,A
57	*	LD	D,A	88	*	ADC	A,B
58	*	LD	E,B	89	*	ADC	A,C
59	*	LD	E,C	8A	*	ADC	A,D
5A	*	LD	E,D	8B	*	ADC	A,E
5B	*	LD	E,E	8C	*	ADC	A,H
5C	*	LD	E,H	8D	*	ADC	A,L
5D	*	LD	E,L	8E	*	ADC	A,(HL)
5E	*	LD	E,(HL)	8F	*	ADC	A,A
5F	*	LD	E,A	90	*	SUB	B
60	*	LD	H,B	91	*	SUB	C
61	*	LD	H,C	92	*	SUB	D
62	*	LD	H,D	93	*	SUB	E
63	*	LD	H,E	94	*	SUB	H
64	*	LD	H,H	95	*	SUB	L
65	*	LD	H,L	96	*	SUB	(HL)
66	*	LD	H,(HL)	97	*	SUB	A
67	*	LD	H,A	98	*	SBC	A,B
68	*	LD	L,B	99	*	SBC	A,C

Hex		Mnemonic		Hex	Mnemonic	
9A	*	SBC	A,D	CB 00	RLC	B
9B	*	SBC	A,E	CB 01	RLC	C
9C	*	SBC	A,H	CB 02	RLC	D
9D	*	SBC	A,L	CB 03	RLC	E
9E	*	SBC	A,(HL)	CB 04	RLC	H
9F	*	SBC	A,A	CB 05	RLC	L
A0	*	AND	B	CB 06	RLC	(HL)
A1	*	AND	C	CB 07	RLC	A
A2	*	AND	D	CB 08	RRC	B
A3	*	AND	E	CB 09	RRC	C
A4	*	AND	H	CB 0A	RRC	D
A5	*	AND	L	CB 0B	RRC	E
A6	*	AND	(HL)	CB 0C	RRC	H
A7	*	AND	A	CB 0D	RRC	L
A8	*	XOR	B	CB 0E	RRC	(HL)
A9	*	XOR	C	CB 0F	RRC	A
AA	*	XOR	D	CB 10	RL	B
AB	*	XOR	E	CB 11	RL	C
AC	*	XOR	H	CB 12	RL	D
AD	*	XOR	L	CB 13	RL	E
AE	*	XOR	(HL)	CB 14	RL	H
AF	*	XOR	A	CB 15	RL	L
B0	*	OR	B	CB 16	RL	(HL)
B1	*	OR	C	CB 17	RL	A
B2	*	OR	D	CB 18	RR	B
B3	*	OR	E	CB 19	RR	C
B4	*	OR	H	CB 1A	RR	D
B5	*	OR	L	CB 1B	RR	E
B6	*	OR	(HL)	CB 1C	RR	H
B7	*	OR	A	CB 1D	RR	L
B8	*	CP	B	CB 1E	RR	(HL)
B9	*	CP	C	CB 1F	RR	A
BA	*	CP	D	CB 20	SLA	B
BB	*	CP	E	CB 21	SLA	C
BC	*	CP	H	CB 22	SLA	D
BD	*	CP	L	CB 23	SLA	E
BE	*	CP	(HL)	CB 24	SLA	H
BF	*	CP	A	CB 25	SLA	L
C0	*	RET	NZ	CB 26	SLA	(HL)
C1	*	POP	BC	CB 27	SLA	A
C2 nnnn	*	JP	NZ, nnnn	CB 28	SRA	B
C3 nnnn	*	JP	nnnn	CB 29	SRA	C
C4 nnnn	*	CALL	NZ, nnnn	CB 2A	SRA	D
C5	*	PUSH	BC	CB 2B	SRA	E
C6 nn	*	ADD	A, nn	CB 2C	SRA	H
C7	*	RST	0	CB 2D	SRA	L
C8	*	RET	Z	CB 2E	SRA	(HL)
C9	*	RET		CB 2F	SRA	A
CA nnnn	*	JP	Z, nnnn	CB 38	SRL	B

Hex	Mnemonic		Hex	Mnemonic	
CB 39	SRL	C	CB 6A	BIT	5,D
CB 3A	SRL	D	CB 6B	BIT	5,E
CB 3B	SRL	E	CB 6C	BIT	5,H
CB 3C	SRL	H	CB 6D	BIT	5,L
CB 3D	SRL	L	CB 6E	BIT	5,(HL)
CB 3E	SRL	(HL)	CB 6F	BIT	5,A
CB 3F	SRL	A	CB 70	BIT	6,B
CB 40	BIT	0,B	CB 71	BIT	6,C
CB 41	BIT	0,C	CB 72	BIT	6,D
CB 42	BIT	0,D	CB 73	BIT	6,E
CB 43	BIT	0,E	CB 74	BIT	6,H
CB 44	BIT	0,H	CB 75	BIT	6,L
CB 45	BIT	0L	CB 76	BIT	6,(HL)
CB 46	BIT	0,(HL)	CB 77	BIT	6,A
CB 47	BIT	0,A	CB 78	BIT	7,B
CB 48	BIT	1,B	CB 79	BIT	7,C
CB 49	BIT	1,C	CB 7A	BIT	7,D
CB 4A	BIT	1,D	CB 7B	BIT	7,E
CB 4B	BIT	1,E	CB 7C	BIT	7,H
CB 4C	BIT	1,H	CB 7D	BIT	7,L
CB 4D	BIT	1,L	CB 7E	BIT	7,(HL)
CB 4E	BIT	1,(HL)	CB 7F	BIT	7,A
CB 4F	BIT	1,A	CB 80	RES	0,B
CB 50	BIT	2,B	CB 81	RES	0,C
CB 51	BIT	2,C	CB 82	RES	0,D
CB 52	BIT	2,D	CB 83	RES	0,E
CB 53	BIT	2,E	CB 84	RES	0,H
CB 54	BIT	2,H	CB 85	RES	0,L
CB 55	BIT	2,L	CB 86	RES	0,(HL)
CB 56	BIT	2,(HL)	CB 87	RES	0,A
CB 57	BIT	2,A	CB 88	RES	1,B
CB 58	BIT	3,B	CB 89	RES	1,C
CB 59	BIT	3,C	CB 8A	RES	1,D
CB 5A	BIT	3,D	CB 8B	RES	1,E
CB 5B	BIT	3,E	CB 8C	RES	1,H
CB 5C	BIT	3,H	CB 8D	RES	1,L
CB 5D	BIT	3,L	CB 8E	RES	1,(HL)
CB 5E	BIT	3,(HL)	CB 8F	RES	1,A
CB 5F	BIT	3,A	CB 90	RES	2,B
CB 60	BIT	4,B	CB 91	RES	2,C
CB 61	BIT	4,C	CB 92	RES	2,D
CB 62	BIT	4,D	CB 93	RES	2,E
CB 63	BIT	4,E	CB 94	RES	2,H
CB 64	BIT	4,H	CB 95	RES	2,L
CB 65	BIT	4,L	CB 96	RES	2,(HL)
CB 66	BIT	4,(HL)	CB 97	RES	2,A
CB 67	BIT	4,A	CB 98	RES	3,B
CB 68	BIT	5,B	CB 99	RES	3,C
CB 69	BIT	5,C	CB 9A	RES	3,D

Hex	Mnemonic		Hex	Mnemonic	
CB 9B	RES	3,E	CB CC	SET	1,H
CB 9C	RES	3,H	CB CD	SET	1,L
CB 9D	RES	3,L	CB CE	SET	1,(HL)
CB 9E	RES	3,(HL)	CB CF	SET	1,A
CB 9F	RES	3,A	CB D0	SET	2,B
CB A0	RES	4,B	CB D1	SET	2,C
CB A1	RES	4,C	CB D2	SET	2,D
CB A2	RES	4,D	CB D3	SET	2,E
CB A3	RES	4,E	CB D4	SET	2,H
CB A4	RES	4,H	CB D5	SET	2,L
CB A5	RES	4,L	CB D6	SET	2,(HL)
CB A6	RES	4,(HL)	CB D7	SET	2,A
CB A7	RES	4,A	CB D8	SET	3,B
CB A8	RES	5,B	CB D9	SET	3,C
CB A9	RES	5,C	CB DA	SET	3,D
CB AA	RES	5,D	CB DB	SET	3,E
CB AB	RES	5,E	CB DC	SET	3,H
CB AC	RES	5,H	CB DD	SET	3,L
CB AD	RES	5,L	CB DE	SET	3,(HL)
CB AE	RES	5,(HL)	CB DF	SET	3,A
CB AF	RES	5,A	CB E0	SET	4,B
CB B0	RES	6,B	CB E1	SET	4,C
CB B1	RES	6,C	CB E2	SET	4,D
CB B2	RES	6,D	CB E3	SET	4,E
CB B3	RES	6,E	CB E4	SET	4,H
CB B4	RES	6,H	CB E5	SET	4,L
CB B5	RES	6,L	CB E6	SET	4,(HL)
CB B6	RES	6,(HL)	CB E7	SET	4,A
CB B7	RES	6,A	CB E8	SET	5,B
CB B8	RES	7,B	CB E9	SET	5,C
CB B9	RES	7,C	CB EA	SET	5,D
CB BA	RES	7,D	CB EB	SET	5,E
CB BB	RES	7,E	CB EC	SET	5,H
CB BC	RES	7,H	CB ED	SET	5,L
CB BD	RES	7,L	CB EE	SET	5,(HL)
CB BE	RES	7,(HL)	CB EF	SET	5,A
CB BF	RES	7,A	CB F0	SET	6,B
CB C0	SET	0,B	CB F1	SET	6,C
CB C1	SET	0,C	CB F2	SET	6,D
CB C2	SET	0,D	CB F3	SET	6,E
CB C3	SET	0,E	CB F4	SET	6,H
CB C4	SET	0,H	CB F5	SET	6,L
CB C5	SET	0,L	CB F6	SET	6,(HL)
CB C6	SET	0,(HL)	CB F7	SET	6,A
CB C7	SET	0,A	CB F8	SET	7,B
CB C8	SET	1,B	CB F9	SET	7,C
CB C9	SET	1,C	CB FA	SET	7,D
CB CA	SET	1,D	CB FB	SET	7,E
CB CB	SET	1,E	CB FC	SET	7,H

Hex		Mnemonic		Hex		Mnemonic	
CB FD		SET	7,L	DD 9Edd		SBC	A,(IX+dd)
CB FE		SET	7,(HL)	DD A6dd		AND	(IX+dd)
CB FF		SET	7,A	DD AEdd		XOR	(IX+dd)
CC nnnn	*	CALL	Z, nnnn	DD B6dd		OR	(IX+dd)
CD nnnn	*	CALL	nnnn	DD BEdd		CP	(IX+dd)
CE nn	*	ADC	A, nn	DD CBdd06		RLC	(IX+dd)
CF	*	RST	8	DD CBdd0E		RRC	(IX+dd)
D0	*	RET	NC	DD CBdd16		RL	(IX+dd)
D1	*	POP	DE	DD CBdd1E		RR	(IX+dd)
D2 nnnn	*	JP	NC, nnnn	DD CBdd26		SLA	(IX+dd)
D3 nn	*	OUT	(nn),A	DD CBdd2E		SRA	(IX+dd)
D4 nnnn	*	CALL	NC, nnnn	DD CBdd3E		SRL	(IX+dd)
D5	*	PUSH	DE	DD CBdd46		BIT	0,(IX+dd)
D6 nn	*	SUB	nn	DD CBdd4E		BIT	1,(IX+dd)
D7	*	RST	10H	DD CBdd56		BIT	2,(IX+dd)
D8	*	RET	C	DD CBdd5E		BIT	3,(IX+dd)
D9		EXX		DD CBdd66		BIT	4,(IX+dd)
DA nnnn	*	JP	C, nnnn	DD CBdd6E		BIT	5,(IX+dd)
DB nn	*	IN	A, (nn)	DD CBdd76		BIT	6,(IX+dd)
DC nnnn	*	CALL	C, nnnn	DD CBdd7E		BIT	7,(IX+dd)
DD 09		ADD	IX,BC	DD CBdd86		RES	0,(IX+dd)
DD 19		ADD	IX,DE	DD CBdd8E		RES	1,(IX+dd)
DD 21nnnn		LD	IX, nnnn	DD CBdd96		RES	2,(IX+dd)
DD 22nnnn		LD	(nnnn),IX	DD CBdd9E		RES	3,(IX+dd)
DD 23		INC	IX	DD CBddA6		RES	4,(IX+dd)
DD 29		ADD	IX,IX	DD CBddAE		RES	5,(IX+dd)
DD 2Annnn		LD	IX, (nnnn)	DD CBddB6		RES	6,(IX+dd)
DD 2B		DEC	IX	DD CBddBE		RES	7,(IX+dd)
DD 34dd		INC	(IX+dd)	DD CBddC6		SET	0,(IX+dd)
DD 35dd		DEC	(IX+dd)	DD CBddCE		SET	1,(IX+dd)
DD 36ddnn		LD	(IX+dd), nn	DD CBddD6		SET	2,(IX+dd)
DD 39		ADD	IX,SP	DD CBddDE		SET	3,(IX+dd)
DD 46dd		LD	B,(IX+dd)	DD CBddE6		SET	4,(IX+dd)
DD 4Edd		LD	C,(IX+dd)	DD CBddEE		SET	5,(IX+dd)
DD 56dd		LD	D,(IX+dd)	DD CBddF6		SET	6,(IX+dd)
DD 5Edd		LD	E,(IX+dd)	DD CBddFE		SET	7,(IX+dd)
DD 66dd		LD	H,(IX+dd)	DD E1		POP	IX
DD 6Edd		LD	L,(IX+dd)	DD E3		EX	(SP),IX
DD 70dd		LD	(IX+dd),B	DD E5		PUSH	IX
DD 71dd		LD	(IX+dd),C	DD E9		JP	(IX)
DD 72dd		LD	(IX+dd),D	DD F9		LD	SP,IX
DD 73dd		LD	(IX+dd),E	DE nn	*	SBC	A, nn
DD 74dd		LD	(IX+dd),H	DF	*	RST	18H
DD 75dd		LD	(IX+dd),L	E0	*	RET	PO
DD 77dd		LD	(IX+dd),A	E1	*	POP	HL
DD 7Edd		LD	A,(IX+dd)	E2 nnnn	*	JP	PO, nnnn
DD 86dd		ADD	A,(IX+dd)	E3	*	EX	(SP),HL
DD 8Edd		ADC	A,(IX+dd)	E4 nnnn	*	CALL	PO, nnnn
DD 96dd		SUB	(IX+dd)	E5	*	PUSH	HL

Hex		Mnemonic		Hex		Mnemonic	
E6 nn	*	AND	nn	ED A2		INI	
E7	*	RST	20H	ED A3		OUTI	
E8	*	RET	PE	ED A8		LDD	
E9	*	JP	(HL)	ED A9		CPD	
EA nnnn	*	JP	PE, nnnn	ED AA		IND	
EB	*	EX	DE,HL	ED AB		OUTD	
EC nnnn	*	CALL	PE, nnnn	ED B0		LDIR	
ED 40		IN	B,(C)	ED B1		CPIR	
ED 41		OUT	(C),B	ED B2		INIR	
ED 42		SBC	HL,BC	ED B3		OTIR	
ED 43nnnn		LD	(nnnn),BC	ED B8		LDDR	
ED 44		NEG		ED B9		CPDR	
ED 45		RETN		ED BA		INDR	
ED 46		IM	0	ED BB		OTDR	
ED 47		LD	I,A	EE nn	*	XOR	N
ED 48		IN	C,(C)	EF	*	RST	28H
ED 49		OUT	(C),C	F0	*	RET	P
ED 4A		ADC	HL,BC	F1	*	POP	AF
ED 4Bnnnn		LD	BC, (nnnn)	F2 nnnn	*	JP	P, nnnn
ED 4D		RETI		F3	*	DI	
ED 4F		LD	R,A	F4 nnnn	*	CALL	P, nnnn
ED 50		IN	D,(C)	F5	*	PUSH	AF
ED 51		OUT	(C),D	F6 nn	*	OR	nn
ED 52		SBC	HL,DE	F7	*	RST	30H
ED 53nnnn		LD	(nnnn),DE	F8	*	RET	M
ED 56		IM	1	F9	*	LD	SP,HL
ED 57		LD	A,I	FA nnnn	*	JP	M, nnnn
ED 58		IN	E,(C)	FB	*	EI	
ED 59		OUT	(C),E	FC nnnn	*	CALL	M, nnnn
ED 5A		ADC	HL,DE	FD 09		ADD	IY,BC
ED 5Bnnnn		LD	DE, (nnnn)	FD 19		ADD	IY,DE
ED 5E		IM	2	FD 21nnnn		LD	IY, nnnn
ED 5F		LD	A,R	FD 22nnnn		LD	(nnnn),IY
ED 60		IN	H,(C)	FD 23		INC	IY
ED 61		OUT	(C),H	FD 29		ADD	IY,IY
ED 62		SBC	HL,HL	FD 2Annnn		LD	IY, (nnnn)
ED 67		RRD		FD 2B		DEC	IY
ED 68		IN	L,(C)	FD 34dd		INC	(IY+dd)
ED 69		OUT	(C),L	FD 35dd		DEC	(IY+dd)
ED 6A		ADC	HL,HL	FD 36ddnn		LD	(IY+dd), nn
ED 6F		RLD		FD 39		ADD	IY,SP
ED 72		SBC	HL,SP	FD 46dd		LD	B,(IY+dd)
ED 73nnnn		LD	(nnnn),SP	FD 4Edd		LD	C,(IY+dd)
ED 78		IN	A,(C)	FD 56dd		LD	D,(IY+dd)
ED 79		OUT	(C),A	FD 5Edd		LD	E,(IY+dd)
ED 7A		ADC	HL,SP	FD 66dd		LD	H,(IY+dd)
ED 7Bnnnn		LD	SP, (nnnn)	FD 6Edd		LD	L,(IY+dd)
ED A0		LDI		FD 70dd		LD	(IY+dd),B
ED A1		CPI		FD 71dd		LD	(IY+dd),C

Hex		Mnemonic	Hex			Mnemonic
FD 72dd	LD	(IY+dd),D	FD CBdd6E		BIT	5,(IY+dd)
FD 73dd	LD	(IY+dd),E	FD CBdd76		BIT	6,(IY+dd)
FD 74dd	LD	(IY+dd),H	FD CBdd7E		BIT	7,(IY+dd)
FD 75dd	LD	(IY+dd),L	FD CBdd86		RES	0,(IY+dd)
FD 77dd	LD	(IY+dd),A	FD CBdd8E		RES	1,(IY+dd)
FD 7Edd	LD	A,(IY+dd)	FD CBdd96		RES	2,(IY+dd)
FD 86dd	ADD	A,(IY+dd)	FD CBdd9E		RES	3,(IY+dd)
FD 8Edd	ADC	A,(IY+dd)	FD CBddA6		RES	4,(IY+dd)
FD 96dd	SUB	(IY+dd)	FD CBddAE		RES	5,(IY+dd)
FD 9Edd	SBC	A,(IY+dd)	FD CBddB6		RES	6,(IY+dd)
FD A6dd	AND	(IY+dd)	FD CBddBE		RES	7,(IY+dd)
FD AEdd	XOR	(IY+dd)	FD CBddC6		SET	0,(IY+dd)
FD B6dd	OR	(IY+dd)	FD CBddCE		SET	1,(IY+dd)
FD BEdd	CP	(IY+dd)	FD CBddD6		SET	2,(IY+dd)
FD CBdd06	RLC	(IY+dd)	FD CBddDE		SET	3,(IY+dd)
FD CBdd0E	RRC	(IY+dd)	FD CBddE6		SET	4,(IY+dd)
FD CBdd16	RL	(IY+dd)	FD CBddEE		SET	5,(IY+dd)
FD CBdd1E	RR	(IY+dd)	FD CBddF6		SET	6,(IY+dd)
FD CBdd26	SLA	(IY+dd)	FD CBddFE		SET	7,(IY+dd)
FD CBdd2E	SRA	(IY+dd)	FD E1		POP	IY
FD CBdd3E	SRL	(IY+dd)	FD E3		EX	(SP),IY
FD CBdd46	BIT	0,(IY+dd)	FD E5		PUSH	IY
FD CBdd4E	BIT	1,(IY+dd)	FD E9		JP	(IY)
FD CBdd56	BIT	2,(IY+dd)	FD F9		LD	SP,IY
FD CBdd5E	BIT	3,(IY+dd)	FE nn	*	CP	nn
FD CBdd66	BIT	4,(IY+dd)	FF	*	RST	38H

Cross-Reference of
8080 and Z-80 Instructions

The instructions are listed in alphabetic order according to the 8080 mnemonic. The following representations are used.

N	8-bit constant
NN	16-bit constant
R	single register
RR	double register
—	range of values expressed as one character
— —	range of values expressed as two characters

8080 code		HEX code	Z-80 code	
ACI	N	CE	ADC	A,N
ADC	M	8E	ADC	A,(HL)
ADC	R	8—	ADC	A,R
ADD	M	86	ADD	A,(HL)
ADD	R	8—	ADD	A,R
ADI	N	C6	ADD	A,N
ANA	M	A6	AND	(HL)
ANA	R	A—	AND	R
ANI	N	E6	AND	N
CALL	NN	CD	CALL	NN
CC	NN	DC	CALL	C,NN
CM	NN	FC	CALL	M,NN
CMA		2F	CPL	
CMC		3F	CCF	
CMP	M	BE	CP	(HL)
CMP	R	B—	CP	R
CNC	NN	D4	CALL	NC,NN
CNZ	NN	C4	CALL	NZ,NN
CP	NN	F4	CALL	P,NN
CPE	NN	EC	CALL	PE,NN
CPI	N	FE	CP	N
CPO	NN	E4	CALL	PO,NN
CZ	NN	CC	CALL	Z,NN

8080 code		HEX code	Z-80 code	
DAA		27	DAA	
DAD	B	09	ADD	HL,BC
DAD	D	19	ADD	HL,DE
DAD	H	29	ADD	HL,HL
DAD	SP	39	ADD	HL,SP
DCR	M	35	DEC	(HL)
DCR	R	— —	DEC	R
DCX	B	0B	DEC	BC
DCX	D	1B	DEC	DE
DCX	H	2B	DEC	HL
DCX	SP	3B	DEC	SP
DI		F3	DI	
EI		FB	EI	
HLT		76	HALT	
IN	N	DB	IN	A,(N)
INR	M	34	INC	(HL)
INR	R	— —	INC	R
INX	B	03	INC	BC
INX	D	13	INC	DE
INX	H	23	INC	HL
INX	SP	33	INC	SP
JC	NN	DA	JP	C,NN
JM	NN	FA	JP	M,NN
JMP	NN	C3	JP	NN
JNC	NN	D2	JP	NC,NN
JNZ	NN	C2	JP	NZ,NN
JP	NN	F2	JP	P,NN
JPE	NN	EA	JP	PE,NN
JPO	NN	E2	JP	PO,NN
JZ	NN	CA	JP	Z,NN
LDA	NN	3A	LD	A,(NN)
LDAX	B	0A	LD	A,(BC)
LDAX	D	26	LD	A,(DE)
LHLD	NN	2A	LD	HL,(NN)
LXI	B,NN	01	LD	BC,NN
LXI	D,NN	11	LD	DE,NN
LXI	H,NN	21	LD	HL,NN
LXI	SP,NN	31	LD	SP,NN
MOV	M,R	— —	LD	(HL),R
MOV	R,M	— —	LD	R,(HL)
MOV	R,R2	— —	LD	R,R2
MVI	M,N	36	LD	(HL),N
MVI	R,N	— —	LD	R,N
NOP		00	NOP	
ORA	M	B6	OR	(HL)
ORA	R	B—	OR	R
ORI	N	F6	OR	N
OUT	N	D3	OUT	(N),A

8080 code		HEX code	Z-80 code	
PCHL		E9	JP	(HL)
POP	B	C1	POP	BC
POP	D	D1	POP	DE
POP	H	E1	POP	HL
POP	PSW	F1	POP	AF
PUSH	B	C5	PUSH	BC
PUSH	D	D5	PUSH	DE
PUSH	H	E5	PUSH	HL
PUSH	PSW	F5	PUSH	AF
RAL		17	RLA	
RAR		1F	RRA	
RC		D8	RET	C
RET		C9	RET	
RLC		07	RLCA	
RM		F8	RET	M
RNC		D0	RET	NC
RNZ		C0	RET	NZ
RP		F0	RET	P
RPE		E8	RET	PE
RPO		E0	RET	PO
RRC		15	RRCA	
RST	0	C7	RST	0
RST	1	CF	RST	8
RST	2	D7	RST	10H
RST	3	DF	RST	18H
RST	4	E7	RST	20H
RST	5	EF	RST	28H
RST	6	F7	RST	30H
RST	7	FF	RST	38H
RZ		C8	RET	Z
SBB	M	9E	SBC	A,(HL)
SBB	R	9—	SBC	A,R
SBI	N	DE	SBC	A,N
SHLD	NN	22	LD	(NN),HL
SPHL		F9	LD	SP,HL
STA	NN	32	LD	(NN),A
STAX	B	02	LD	(BC),A
STAX	D	12	LD	(DE),A
STC		37	SCF	
SUB	M	96	SUB	(HL)
SUB	R	9—	SUB	R
SUI	N	D6	SUB	N
XCHG		EB	EX	DE,HL
XRA	M	AE	XOR	(HL)
XRA	R	A—	XOR	R
XRI	N	EE	XOR	N
XTHL		E3	EX	(SP),HL

Details of the Z-80
and 8080 Instruction Set

A summary of the Z-80 and 8080 instruction set is given in this appendix.* The instructions are listed alphabetically by the official Zilog mnemonic. If there is a corresponding 8080 instruction, the Intel mnemonic is shown in angle brackets; if not, "no 8080" is shown in the angle brackets. The Z-80 mnemonics are listed in numeric order in Appendix F. The Z-80 equivalent of an 8080 mnemonic can be found from the cross-reference given in Appendix G.

The letters A, B, C, D, E, H, I, L, IX, IY, R, and SP are used for the standard Z-80 register names. In addition, the symbols BC, DE, and HL are used for the register pairs. The following symbols are used for general arguments.

r, r2	8-bit CPU register
dd	8-bit signed displacement
nn	general 8-bit constant
nnnn	16-bit constant

The flag bits are represented by:

C	carry
H	half carry
N	add/subtract
P/O	parity/overflow
S	sign
Z	zero

Pointers to memory or input or output addresses are enclosed in parentheses.

---

*More details can be obtained from the Zilog programmer's manual, *Z-80 Assembly Language Programming Manual*, Zilog, Inc., 1977.

```
    ADC     A,(HL)   <ADC    M>
```

Add the memory byte pointed to by the HL register pair to the accumulator and the carry flag. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag reset: N

```
    ADC     A,(IX+dd)      <no 8080>
    ADC     A,(IY+dd)      <no 8080>
```

Add the memory byte referenced by the sum of the specified index register and the displacement to the accumulator and the carry flag. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag reset: N

```
    ADC     A,r     <ADC     r>
```

Add the value in register r to the accumulator and the carry flag. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z,
Flags reset: N

```
    ADC     A,nn    <ACI     nn>
```

Add the constant given in the second operand to the accumulator and the carry flag. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag reset: N

```
    ADC     HL,BC   <no 8080>
    ADC     HL,DE   <no 8080>
    ADC     HL,HL   <no 8080>
    ADC     HL,SP   <no 8080>
```

Add the indicated double register to the HL register and the carry flag. The result is placed in HL.

Flags affected: C, H, O, S, Z,
Flag reset: N

```
    ADD     A,(HL)          <ADD     M>
```

Add the memory byte pointed to by the HL pair to the accumulator. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag reset: N

```
ADD     A,(IX+dd)   <no 8080>
ADD     A,(IY+dd)   <no 8080>
```

Add the memory byte pointed to by the sum of the specified index register and the displacement to the accumulator. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag reset: N

```
ADD     A,r     <ADD    r>
```

Add the value in register r to the accumulator. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag reset: N

```
ADD     A,nn    <ADI    nn>
```

Add the immediate byte (the second operand) to the accumulator. The result is placed in A.

Flags affected: C, H, O, S, Z
Flag reset: N

```
ADD     HL,BC   <DAD    B>
ADD     HL,DE   <DAD    D>
ADD     HL,HL   <DAD    H>
ADD     HL,SP   <DAD    SP>
```

Add the specified double register to the HL pair. The result is placed in HL. This is a double-precision addition. The carry flag is set if an overflow occurs. The instruction ADD HL,HL performs a 16-bit arithmetic shift left, effectively doubling the value in HL. The ADD HL,SP instruction can be used with the 8080 CPU to save an incoming stack pointer:

```
            LXI     H,0
            DAD     SP
            SHLD    nnnn
```

Flags affected: C, H, O, S, Z
Flag reset: N

```
ADD     IX,BC       <no 8080>
ADD     IX,DE       <no 8000>
ADD     IX,IX       <no 8080>
ADD     IX,SP       <no 8080>
ADD     IY,BC       <no 8080>
ADD     IY,DE       <no 8080>
ADD     IY,IY       <no 8080>
ADD     IY,SP       <no 8080>
```

Add the indicated double register to the specified index register. The result is placed in the index register. The HL register pair does not participate in this group of instructions. Notice that there is no equivalent series of ADC instructions.

Flags affected: C, O, S, Z
Flag reset: N

```
AND    (HL)    <ANA    M>
```

Perform a logical AND with the accumulator and the memory location pointed to by the HL register pair. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, N
Flag set: H

```
AND    (IX+dd)    <no 8080>
AND    (IY+dd)    <no 8080>
```

Perform a logical AND with the accumulator and the memory byte referenced by the sum of the index register and displacement. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, N
Flag set: H

```
AND    r    <ANA    r>
```

Perform a logical AND with the accumulator and register r. The result is placed in the accumulator. An instruction AND A is an effective way to test the parity, sign, and zero flags.

Flags affected: P, S, Z
Flags reset: C, N
Flag set: H

```
AND    nn    <ANI    nn>
```

Perform a logical AND with the accumulator and the constant given in the argument. The result is placed in the accumulator. This instruction can be used to selectively reset bits of the accumulator. For example, the instruction AND 7FH will reset bit 7.

Flags affected: P, S, Z
Flags reset: C, N
Flag set: H

```
BIT    b,(HL)          <no 8080>
BIT    b,(IX+dd)       <no 8080>
BIT    b,(IY+dd)       <no 8080>
```

Test bit b of the memory byte referenced by the second operand. Bit b can range from zero through 7. The zero flag is set if the referenced bit is a logical 1; otherwise, it is reset. Thus, the zero flag becomes the complement of the selected bit.

Flag affected: Z
Flag set: H
Flag reset: N

```
BIT    b,r             <no 8080>
```

Test bit b of register r, where b can range from zero through 7. The zero flag is set if the referenced bit is a logical 1. It is reset otherwise.

Flag affected: Z
Flag set: H
Flag reset: N

```
CALL    nnnn    <CALL    nnnn>
```

Unconditional subroutine call to address nnnn. The address of the following instruction is pushed onto the stack.

Flags affected: none

```
CALL    C,nnnn    <CC     nnnn>
CALL    M,nnnn    <CM     nnnn>
CALL    NC,nnnn   <CNC    nnnn>
CALL    NZ,nnnn   <CNZ    nnnn>
CALL    P,nnnn    <CP     nnnn>
CALL    PE,nnnn   <CPE    nnnn>
CALL    PO,nnnn   <CPO    nnnn>
CALL    Z,nnnn    <CZ     nnnn>
```

Conditional subroutine call to address nnnn. The address of the following instruction is pushed onto the stack. The conditions are:

C	carry flag set	(carry)
M	sign flag set	(minus)
NC	carry flag reset	(not carry)
NZ	zero flag reset	(not zero)
P	sign flag reset	(plus)
PE	parity flag set	(parity even)
PO	parity flag reset	(parity odd)
Z	zero flag set	(zero)

```
CCF                 < CMC >
```

Complement the carry flag. This instruction can be given after a SCF command to reset the carry flag.

Flag affected: C
Flag reset: N

```
CP        (HL)     <CMP     M>
```

Compare the byte in memory pointed to by the HL pair to the accumulator (an implied operand). The zero flag is set if the accumulator is equal to the operand. The carry flag is set if the accumulator is smaller than the operand.

Flags affected: C, H, O, S, Z
Flag set: N

```
CP        (IX+dd)         <no 8080>
CP        (IY+dd)         <no 8080>
```

Compare the memory location referenced by the sum of the index register and displacement to the accumulator which is an implied operand. The zero flag is set if the accumulator is equal to the operand. The carry flag is set if the accumulator is smaller than the operand.

Flags affected: C, H, O, S, Z
Flag set: N

```
CP        r         <CMP     r>
```

Compare register r to the accumulator, which is an implied operand. The zero flag is set if the accumulator is equal to the operand. The carry flag is set if the accumulator is smaller than the operand.

Flags affected: C, H, O, S, Z
Flag set: N

```
CP        nn        <CPI     nn>
```

Compare the constant given in the operand to the accumulator, which is an implied operand. The zero flag is set if the accumulator is equal to the operand. The carry flag is set if the accumulator is smaller than the operand.

Flags affected: C, H, O, S, Z
Flag set: N

```
CPD       <no 8080>
CPDR      <no 8080>
CPI       <no 8080>
CPIR      <no 8080>
```

Compare the memory byte pointed to by HL to the accumulator. Decrement HL (if D) or increment HL (if I). Decrement the byte count in the BC register. Repeat the operation for CPDR and CPIR until a match is found or until the BC register pair has been decremented to zero. The zero flag is set if a match is found. The parity flag is set if BC is decremented to zero.

> Flags affected: H, S
> Flags set: N, Z if A = (HL), P if BC = 0

```
CPL      < CMA >
```

Complement the accumulator. This instruction performs a one's complement on the accumulator. (Compare to the instruction NEG.)

> Flags set: H, N

```
DAA      < DAA >
```

Decimal adjust the accumulator. This instruction is used after each addition with BCD numbers. The Z-80 performs this operation properly for both addition and subtraction. The 8080, however, gives an incorrect result for subtraction.

> Flags affected: O, S, Z, C, H

```
DEC      (HL)     <DCR     M>
```

Decrement the memory byte pointed to by the HL register pair.

> Flags affected: H, O, S, Z
> Flag set: N
> Flag not affected: C

```
DEC      (IX+dd)        <no 8080>
DEC      (IY+dd)        <no 8080>
```

Decrement the memory byte pointed to by the sum of the index register and the displacement.

> Flags affected: H, O, S, Z
> Flag set: N
> Flag not affected: C

```
DEC      r        <DCR     r>
```

Decrement the register r. Don't try to decrement a register past zero while executing a JP NC loop. The carry flag is not affected by this operation.

> Flags affected: H, O, S, Z
> Flag set: N
> Flag not affected: C

```
DEC     BC      <DCX    B>
DEC     DE      <DCX    D>
DEC     HL      <DCX    H>
DEC     SP      <DCX    SP>
```

Decrement the indicated double register. Don't try to decrement a double register to zero in a JP NZ loop. It won't work since this operation does not affect any of the PSW flags. Instead, move one byte of the double register into the accumulator and perform a logical OR with the other byte.

```
            LD    A,C
            OR    B
            JR    NZ,nnnn
```

Flags affected: none!!!!

```
DEC     IX      <no 8080>
DEC     IY      <no 8080>
```

Decrement the index register.

Flags affected: none

```
DI      < DI >
```

Disable maskable interrupt request.

```
DJNZ    dd      <no 8080>
```

Decrement register B and jump relative to displacement dd if B register is not zero.

Flags affected: none

```
EI      < EI >
```

Enable maskable interrupt request.

```
EX      (SP),HL         < XTHL >
```

Exchange the byte at the stack pointer with register L. Exchange the byte at the stack pointer + 1 with register H.

Flags affected: none

```
EX      (SP),IX         <no 8080>
EX      (SP),IY         <no 8080>
```

Exchange the 16 bits referenced by the stack pointer with the specified index register.

Flags affected: none

```
   EX        AF,AF'      <no 8080>
```

Exchange the accumulator and flag register with the alternate set.

    Flags affected: all

```
   EX        DE,HL       < XCHG >
```

Exchange the double registers DE and HL.

    Flags affected: none

```
   EXX                   <no 8080>
```

Exchange BC, DE, and HL with the alternate set.

    Flags affected: none

```
   HALT        < HLT >
```

Suspend operation of the CPU until a reset or interrupt occurs. Dynamic memory refresh continues during a halt.

```
   IM        0      <no 8080>
   IM        1      <no 8080>
   IM        2      <no 8080>
```

Sets interrupt mode 0, 1, or 2. Interrupt mode 0 is automatically selected when a Z-80 reset occurs. The result is the same as the 8080 interrupt response. Interrupt mode 1 performs an RST 38H instruction. Interrupt mode 2 provides for many interrupt locations.

```
   IN        r,(C)       <no 8080>
```
9
Input a byte from the port address in register C to register r.

    Flags affected: P, S, Z
    Flags reset: H, N

```
   IN        A,(nn)      <IN    nn>
```

Input a byte from the port address nn to the accumulator.

    Flags affected: none

```
   INC      (HL)    <INR    M>
```

Increment the memory byte pointed to by the HL pair.

    Flags affected: H, O, S, Z
    Flag set: N
    Flag not affected. C!!!!

```
INC      (IX+dd)      <no 8080>
INC      (IY+dd)      <no 8080>
```

Increment the memory byte pointed to by the sum of the index register and the displacement.

Flags affected: H, O, S, Z
Flag set: N
Flag not affected: C!!!

```
INC      r        <INR    r>
```

Increment the 8-bit register r. Don't try to increment a register past zero while executing a JP NC loop. It won't work because the carry flag is unaffected by this instruction.

Flags affected: H, O, S, Z
Flag set: N
Flag not affected: C!!!

```
INC      BC       <INX    B>
INC      DE       <INX    D>
INC      HL       <INX    H>
INC      SP       <INX    SP>
```

Increment the specified double register.

Flags affected: none!!!!

```
INC      IX       <no 8080>
INC      IY       <no 8080>
```

Increment the specified index register.

Flags affected: none

```
IND      <no 8080>
INDR     <no 8080>
INI      <no 8080>
INIR     <no 8080>
```

Input a byte from the port address in register C to the memory byte pointed to by HL. Decrement register B. The HL register is incremented (if I) or decremented (if D). For INDR and INIR the process is repeated until the 8-bit register B becomes zero.

Flag affected: Z (if B = 0)
Flag set: N

```
JP      (HL)    < PCHL >
```

Copy the HL register pair into the program counter; then retrieve the next instruction from the address referenced by HL. This instruction causes a jump to the address referenced by HL.

Flags affected: none

```
JP      (IX)    <no 8080>
JP      (IY)    <no 8080>
```

Copy the contents of the specified index register into the program counter; then retrieve the next instruction from the address referenced by IX or IY.

Flags affected: none

```
JP      nnnn    <JMP    nnnn>
```

Unconditional jump to address nnnn.

Flags affected: none

```
JP      C,nnnn    <JC     nnnn>
JP      M,nnnn    <JM     nnnn>
JP      NC,nnnn   <JNC    nnnn>
JP      NZ,nnnn   <JNZ    nnnn>
JP      P,nnnn    <JP     nnnn>
JP      PE,nnnn   <JPE    nnnn>
JP      PO,nnnn   <JPO    nnnn>
JP      Z,nnnn    <JZ     nnnn>
```

Conditional jump to address nnnn where:

C	means carry flag set	(carry)
M	means sign flag set	(minus)
NC	means carry flag reset	(not carry)
NZ	means zero flag reset	(not zero)
P	means sign flag reset	(plus)
PE	means parity flag set	(parity even)
PO	means parity flag reset	(parity odd)
Z	means zero flag set	(zero)

```
JR      dd      <no 8080>
```

Unconditional relative jump with a signed displacement nn. The jump is limited to 129 bytes forward and 126 bytes backward in memory.

Flags affected: none

```
JR      C,dd        <no 8080>
JR      NC,dd       <no 8080>
JR      NZ,dd       <no 8080>
JR      Z,dd        <no 8080>
```

Conditional relative jump to address nn where:

C   means carry flag set   (carry)
NC   means carry flag reset   (not carry)
NZ   means zero flag reset   (not zero)
Z   means zero flag set   (zero)

```
LD      (BC),A      <STAX   B>
LD      (DE),A      <STAX   D>
```

Move the byte in the accumulator to the memory byte referenced by the specified register pair.

```
LD      (HL),r      <MOV    M,r>
```

Move the byte in register r to the memory byte pointed to by the HL pair.

```
LD      (HL),nn     <MVI    M,nn>
```

Move the immediate byte nn into the memory byte referenced by the HL pair.

```
LD      (IX+dd),r   <no 8080>
LD      (IX+dd),nn  <no 8080>
LD      (IY+dd),r   <no 8080>
LD      (IY+dd),nn
```

Move the byte in register r or the immediate byte nn into the memory byte referenced by the sum of the index register plus the displacement. These instructions can be used to load relocatable binary code.

```
LD      (nnnn),A    <STA    nnnn>
```

Store the accumulator in the memory location referenced by nnnn.

```
LD      (nnnn),BC   <no 8080>
LD      (nnnn),DE   <no 8080>
```

Store the low-order byte (C or E) of the specified double register at the memory location nnnn. Store the high-order byte (B or D) at nnnn + 1.

```
LD      (nnnn),HL   <SHLD   nnnn>
```

Store register L at the memory address nnnn. Store register H at the address nnnn + 1.

```
LD      (nnnn),IX    <no 8080>
LD      (nnnn),IY    <no 8080>
LD      (nnnn),SP    <no 8080>
```

Store the low-order byte of the specified register IX, IY, or SP at the location nnnn. Store the high-order byte at nnnn + 1. The instruction LD (nnnn),SP can be used to temporarily save an incoming stack pointer. It can later be restored by a LD SP,(nnnn) operation.

```
LD      A,(BC)    <LDAX    B>
LD      A,(DE)    <LDAX    D>
```

Move the memory byte referenced by the specified register pair BC or DE into the accumulator.

```
LD      A,I    <no 8080>
```

Load the accumulator from the interrupt-vector register. The parity flag reflects the state of the interrupt-enable flip-flop.

Flags affected: S, Z, P
Flags reset: H, N

```
LD      A,R    <no 8080>
```

Load the accumulator from the memory-refresh register. The parity flag reflects the state of the interrupt-enable flip-flop. This is an easy way to obtain a fairly decent random number.

Flags affected: S, Z, P
Flags reset: H, N

```
LD      I,A    <no 8080>
```

Copy the accumulator into the interrupt-vector register.

Flags affected: none

```
LD      R,A    <no 8080>
```

Copy the accumular into memory-refresh register.

Flags affected: none

```
LD      r,(HL)       <MOV    r,M>
```

Move the byte in the memory location pointed to by the HL register pair into register r.

```
LD      r,(IX+dd)      <no 8080>
LD      r,(IY+dd)      <no 8080>
```

Move the byte at the memory location referenced by the sum of the index register and the displacement into register r.

```
LD      r,r2     <MOV    r,r2>
```

Move the byte from register r2 to r.

```
LD      r,nn     <MVI    r,nn>
```

Load register r with the 8-bit data byte nn.

```
LD      A,(nnnn)      <LDA     nnnn>
```

Load the accumulator from the memory byte referenced by the 16-bit pointer nnnn.

```
LD      BC,(nnnn)      <no 8080>
LD      DE,(nnnn)      <no 8080>
```

Load the low-order byte (C or E) from the location referenced by the 16-bit pointer nnnn. Load the high-order byte (B or D) from nnnn + 1.

```
LD      HL,(nnnn)      <LHLD    nnnn>
```

Load register L from the address referenced by the 16-bit value nnnn. Load register H from the address nnnn + 1.

```
LD      BC,nnnn      <LXI    B,nnnn>
LD      DE,nnnn      <LXI    D,nnnn>
LD      HL,nnnn      <LXI    H,nnnn>
LD      SP,nnnn      <LXI SP,nnnn>
LD      IX,nnnn      <no 8080>
LD      IY,nnnn      <no 8080>
```

Load the specified double register with the 16-bit constant nnnn. Be careful not to confuse LD HL,(nnnn) with LD HL,nnnn.

```
LD      IX,(nnnn)      <no 8080>
LD      IY,(nnnn)      <no 8080>
LD      SP,(nnnn)      <no 8080>
```

Load the low byte of IX, IY, or SP from the memory location nnnn. Load the high byte from nnnn + 1. The LD SP,(nnnn) instruction can be used to retrieve a previously saved stack pointer.

```
LD      SP,HL       < SPHL >
LD      SP,IX       <no 8080>
LD      SP,IY       <no 8080>
```

Load the stack pointer from the specified 16-bit register. The SPHL instruction can be used to retrieve a previously saved stack pointer when the 8080 CPU is used.

> LHLD   nnnn
> SPHL

```
LDD         <no 8080>
LDDR        <no 8080>
LDI         <no 8080>
LDIR        <no 8080>
```

Move the byte referenced by the HL pair into the location pointed to by the DE register pair. Decrement the 16-bit byte counter in BC. Increment (if I) or decrement (if D) both HL and DE. Repeat the operation for LDDR and LDIR until the BC register has been decremented to zero.

```
NEG             <no 8080>
```

This instruction performs a two's complement on the accumulator. It effectively subtracts the accumulator from zero. To perform this task on an 8080, use a CMA command followed by an INR A command.

Flags affected: all

```
NOP                 < NOP >
```

No operation is performed by the CPU.

Flags affected: none

```
OR      (HL)        <ORA    M>
```

Perform a logical OR with the accumulator and the byte referenced by HL. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, H, N

```
OR      (IX+dd)     <no 8080>
OR      (IY+dd)     <no 8080>
```

Perform a logical OR with the accumulator and the byte referenced by the specified index register plus the displacement. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, H, N

```
OR      r           <ORA    r>
```

Perform a logical OR with the accumulator and the register r. The result is placed in the accumulator. An instruction of OR A is an efficient way to test the parity, sign, and zero flags.

Flags affected: P, S, Z
Flags reset: C, H, N

```
OR      nn          <ORI    nn>
```

Perform a logical OR with the accumulator and the byte nn. The result is placed in the accumulator. This instruction can be used to set individual bits of the accumulator. For example, OR 20H will set bit 5 to a logical 1.

Flags affected: P, S, Z
Flags reset: C, H, N

```
OTDR                <no 8080>
OTIR                <no 8080>
```

Output a byte from the memory location pointed to by the HL pair. The port address is contained in register C. Register B is decremented. The HL register pair is incremented (if I) or decremented (if D). The process is repeated until register B has become zero.

Flags set: N, Z

```
OUT     (C),r       <no 8080>
```

Output the byte in register r to the port address contained in register C.

Flags affected: none

```
OUT     (nn),A      <OUT    nn>
```

Output the byte in the accumulator to the port address nn.

Flags affected: none

```
OUTD                <no 8080>
OUTI                <no 8080>
```

Output a byte from the memory location pointed to by the HL pair. The port address is contained in register C. Register B is decremented. The HL register pair is incremented (if I) or decremented (if D).

Flag affected: Z
Flag set: N

```
POP     AF        <POP    PSW>
```

Move the byte at the memory location referenced by the stack pointer into the flag register (PSW), and increment the stack pointer. Then move the byte at the location referenced by the new stack-pointer value into the accumulator and increment the stack pointer a second time.

Flags affected: all

```
POP     BC        <POP    B>
POP     DE        <POP    D>
POP     HL        <POP    H>
```

Copy two bytes of memory into the appropriate double register as follows. The memory byte referenced by the stack pointer is moved into the low-order byte (C, E, or L), then the stack pointer is incremented. The memory byte referenced by the new stack pointer is then moved into the high-order byte (B, D, or H). The stack pointer is incremented a second time.

Flags affected: none

```
POP     IX        <no 8080>
POP     IY        <no 8080>
```

Copy the top of the stack into the specified index register. Increment the stack pointer twice.

Flags affected: none

```
PUSH    AF        <PUSH   PSW>
```

Store the accumulator and flag register in memory as follows. The stack pointer is decremented, then the value in the accumulator is moved to the memory byte referenced by the stack pointer. The stack pointer is decremented a second time. The flag register is copied to the byte at the memory address referenced by the current stack-pointer position.

Flags affected: none

```
PUSH    BC        <PUSH   B>
PUSH    DE        <PUSH   D>
PUSH    HL        <PUSH   H>
```

Store the referenced double register in memory as follows. The stack pointer is decremented, then the byte in the specified high-order register B, D, or H is copied to the memory location referenced by the stack pointer. The stack pointer is decremented a second time. The byte in the low-order position C, E, or L is moved to the byte referenced by the current value of the stack pointer.

Flags affected: none

```
PUSH    IX      <no 8080>
PUSH    IY      <no 8080>
```

The indicated index register is copied to the top of the stack. The stack pointer is decremented twice.

Flags affected: none

```
RES     b,(HL)      <no 8080>
RES     b,(IX+dd)   <no 8080>
RES     b,(IY+dd)   <no 8080>
```

Reset bit b of the memory byte referenced by the second operand. Bit b can range from zero through 7.

Flag reset: N
Other flags affected: none

```
RES     b,r         <no 8080>
```

Reset bit b of register r to a value of zero. Bit b can range from zero through 7.

Flag reset: N
Other flags affected: none

```
RET     < RET >
```

Return from a subroutine. The top of the stack is moved into the program counter. The stack pointer is incremented twice.

```
RET     C       < RC >
RET     M       < RM >
RET     NC      < RNC >
RET     NZ      < RNZ >
RET     P       < RP >
RET     PE      < RPE >
RET     PO      < RPO >
RET     Z       < RZ >
```

Conditional return from a subroutine. If the condition is met, the top of the stack is moved into the program counter. The stack pointer is incremented twice.

C	means carry flag set	(carry)
M	means sign flag set	(minus)
NC	means carry flag reset	(not carry)
NZ	means zero flag reset	(not zero)
P	means sign flag reset	(plus)
PE	means parity flag set	(parity even)
PO	means parity flag reset	(parity odd)
Z	means zero flag set	(zero)

```
    RETI        <no 8080>
```

Return from maskable interrupt.

```
    RETN        <no 8080>
```

Return from nonmaskable interrupt.

The following RL and RLA instructions rotate bits to the left through carry.

```
!->------------->--------------->------------------>------!
!                                                         !
!   !---!           !---!---!---!---!---!---!---!---!      !
!-  !   ! <-------<-  <-  <-  <-  <-  <-  <-  <-    ! <-!
   !---!            !---!---!---!---!---!---!---!---!
   carry                          register
```
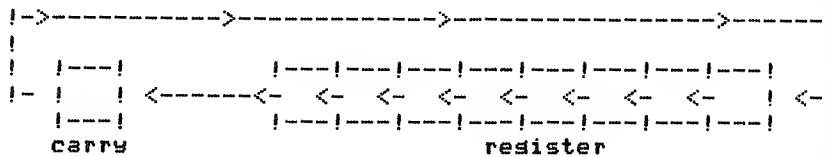
```
RL          (HL)        <no 8080>
```

The memory byte referenced by the HL pair is rotated left through carry.
The carry flag moves into bit zero. Bit 7 moves to the carry flag.

    Flags affected: C, P, S, Z
    Flags reset: H, N

```
RL          (IX+dd)            <no 8080>
RL          (IY+dd)            <no 8080>
```

The memory byte referenced by the sum of the index register and the dis-
placement is rotated left through carry. The carry flag moves into bit zero.
Bit 7 moves to the carry flag.

    Flags affected: C, P, S, Z
    Flags reset: H, N

```
RL          r           <no 8080>
```

The byte in register r is rotated left through carry. The carry flag moves into
bit zero. Bit 7 moves to the carry flag. Note: the instruction RL A performs
the same task that the separate instruction RLA does, but the former takes
twice as long as the latter.

    Flags affected: C, P, S, Z
    Flags reset: H, N

```
RLA        < RAL >
```

The byte in the accumulator is rotated left through carry. The carry flag
moves to bit zero. Bit 7 of the accumulator moves to the carry flag.

Flag affected: C
Flags reset: H, N

The following RLC and RLCA instructions rotate bits to the left.

```
   !->---------------->---------------------->------!
   !                  !                            !
!---!      !---!---!---!---!---!---!---!---!        !
!  <-----!---<-  <-  <-  <-  <-  <-  <-  <----!
!---!      !---!---!---!---!---!---!---!---!
carry              resister
```
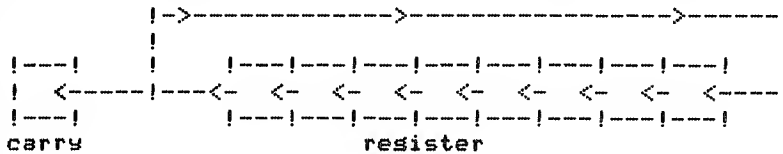
RLC   (HL)   <no 8080>

The byte referenced by the HL pair is rotated left circularly. Bit 7 moves to both the zero bit and to the carry flag.

Flags affected: C, P, S, Z
Flags reset: H, N

RLC   (IX+dd)   <no 8080>
RLC   (IY+dd)   <no 8080>

The byte referenced by the specified index register plus the displacement is rotated left circularly. Bit 7 moves to both bit zero and the carry flag.

Flags affected: C, P, S, Z
Flags reset: H, N

RLC   r   <no 8080>

The byte in register r is rotated left circularly. Bit 7 moves to both bit zero and the carry flag. Note: RLC A performs the same task that another instruction RLCA does, but the former instruction takes twice as long as the latter.

Flags affected: C, P, S, Z
Flags reset: H, N

RLCA   < RLC >

The accumulator is rotated left circularly. Bit 7 moves to both bit zero and the carry flag.

Flag affected: C
Flags reset: H, N

RLD   <no 8080>

A 4-bit rotation over 12 bits. The low 4 bits of A move to the low 4 bits of the memory location referenced by the HL pair. The original low 4 bits of

memory move to the high 4 bits. The original high 4 bits move to the low 4 bits of A. This instruction is used for BCD operations.

Flags affected: P, S, Z
Flags reset: H, N

```
                        !--<---<-!      !-<----<-!
                        !        !      !   !        !
            !--------!--------!    !--------!--------!
            ! 4 bits ! 4 bits !    ! 4 bits ! 4 bits !
            !--------!--------!    !--------!--------!
              accumulator   !        memory     !
                        !-->--------->------->-!
```

The following RR and RRA instructions rotate bits to the right through carry.
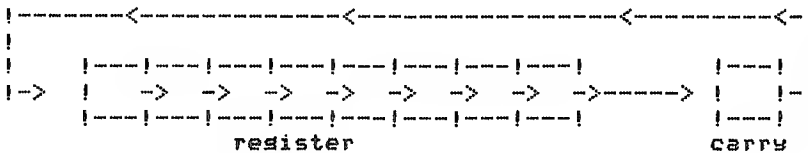
```
      !-------<--------------<-----------------<----------<-!
      !                                                     !
      !    !---!---!---!---!---!---!---!---!          !---! !
      !->  !   -> -> -> -> -> -> -> ->------>  !    !-!
      !    !---!---!---!---!---!---!---!---!          !---!
                        register                     carry
```

```
    RR       (HL)     <no 8080>
```

The memory byte pointed to by the HL pair is rotated right through carry. Carry moves to bit 7. Bit zero moves to the carry flag.

Flags affected: C, P, S, Z
Flags reset: H, N

```
    RR      (IX+dd)          <no 8080>
    RR      (IY+dd)          <no 8080>
```

The memory byte pointed to by the specified index register plus the offset is rotated right through carry. The carry flag moves to bit 7. Bit zero moves to the carry flag.

Flags affected: C, P, S, Z
Flags reset: H, N

```
    RR       r              <no 8080>
```

The byte in register r is rotated right through carry. Carry moves to bit 7. Bit zero moves to the carry flag. Note: RR A performs the same task that another instruction RRA does, but the former instruction takes twice as long as the latter.

Flags affected: C, P, S, Z
Flags reset: H, N

```
    RRA           < RAR >
```

The accumulator is rotated right through carry. The carry flag moves to bit 7. Bit zero moves to the carry flag.

Flag affected: C
Flags reset: H, N

The following RRC and RRCA instructions rotate bits to the right.

```
!-------<-------------<----------------<-!
!                                        !
!      !---!---!---!---!---!---!---!---!  !    !---!
!-->   !   -> -> -> -> -> -> -> ->--!---->   !
      !---!---!---!---!---!---!---!---!       !---!
                  register                    carry
```

```
    RRC     (HL)    <no 8080>
```

The memory byte pointed to by the HL pair is rotated right circularly. Bit zero moves to both the carry flag and bit 7.

Flags affected: C, P, S, Z
Flags reset: H, N

```
    RRC     (IX+dd)         <no 8080>
    RRC     (IY+dd)         <no 8080>
```

The memory byte pointed to by the index register plus the offset is rotated right circularly. Bit zero moves to both the carry flag and bit 7.

Flags affected: C, P, S, Z
Flags reset: H, N

```
    RRC     r       <no 8080>
```

The byte in register r is rotated right circularly. Bit zero moves to both the carry flag and bit 7. Note: RRC A performs the same task that another instruction RRCA does, but the former instruction takes twice as long as the latter.

Flags affected: C, P, S, Z
Flags reset: H, N

```
    RRCA          < RRC >
```

The accumulator is rotated right circularly. Bit zero moves to both the carry flag and bit 7.

Flag affected: C
Flags reset: H, N

```
RRD       <no 8080>
```

A 4-bit rotation over 12 bits. The low 4 bits of A move to the high 4 bits of the memory location referenced by the HL pair. The original high 4 bits of memory move to the low 4 bits. The original low 4 bits move to the low 4 bits of A. This instruction is used for BCD operations.

Flags affected: P, S, Z
Flags reset: H, N

```
                !-->--->-!       !->---->-!
                !        !       !        !
        !--------!--------!   !--------!--------!
        ! 4 bits ! 4 bits !   ! 4 bits ! 4 bits !
        !--------!--------!   !--------!--------!
         accumulator     !       memory      !
                !--<--------<------<-!
```
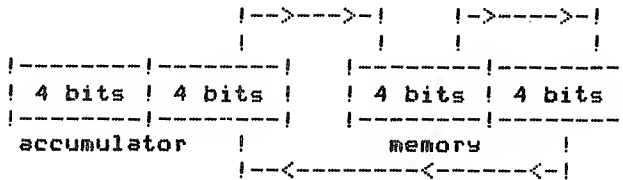
```
RST  00H          <RST  0>
RST  08H          <RST  1>
RST  10H          <RST  2>
RST  18H          <RST  3>
RST  20H          <RST  4>
RST  28H          <RST  5>
RST  30H          <RST  6>
RST  38H          <RST  7>
```

These restart instructions generate one-byte subroutine calls to address given in the Z-80 operand.

```
SBC       A,(HL)   <SBB     M>
```

Subtract the carry flag and the memory byte pointed to by the HL pair from the accumulator. The result is placed in the accumulator. Some Z-80 assemblers allow the 8080 mnemonic of SBB to be used as an alternate Z-80 mnemonic for this instruction.

Flags affected: C, H, O, S, Z
Flag set: N

```
SBC       A,(IX+dd)      <no 8080>
SBC       A,(IY+dd)      <no 8080>
```

Subtract the carry flag and the memory byte pointed to by the sum of the index register and displacement from the accumulator. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag set: N

```
SBC     A,r     <SBB    r>
```

Subtract the carry flag and the specified CPU register from the accumulator. The result is placed in the accumulator. Some Z-80 assemblers allow the 8080 mnemonic of SBB to be used as an alternate Z-80 mnemonic for this instruction.

Flags affected: C, H, O, S, Z
Flag set: N

```
SBC     A,nn    <SBI    nn>
```

Subtract the immediate byte (the second operand) and the carry flag from the accumulator. The result is placed in the accumulator. Some Z-80 assemblers allow the 8080 mnemonic of SBB to be used as an alternate Z-80 mnemonic for this instruction.

Flags affected: C, H, O, S, Z
Flag set: N

```
SBC     HL,BC   <no 8080>
SBC     HL,DE   <no 8080>
SBC     HL,HL   <no 8080>
SBC     HL,SP   <no 8080>
```

Subtract the specified CPU double register and the carry flag from the HL register pair. The result is placed in HL. You may need to reset the carry flag with an OR A operation before using these instructions.

Flags affected: C, H, O, S, Z
Flag set: N

```
SCF         < STC >
```

Set the carry flag. There is no equivalent reset command. However, the carry flag can be reset with the XOR A instruction, or with the pair of instructions SCF and CCF.

Bit set: C
Bits reset: H, N

```
SET     b,(HL)      <no 8080>
SET     b,(IX+dd)   <no 8080>
SET     b,(IY+dd)   <no 8080>
```

Set bit b of the memory byte referenced by the second operand. Bit b can range from zero through 7.

Flag reset: N
Other flags affected: none

```
    SET      b,r                <no 8080>
```

Set bit b of register r. Bit b can range from zero through 7.

Flag reset: N
Other flags affected: none

The following SLA instructions shift bits to the left.

```
   !---!             !---!---!---!---!---!---!---!---!
   !   ! <-------<-- <-  <-  <-  <-  <-  <-  <-   ! <-- 0
   !---!             !---!---!---!---!---!---!---!---!
   carry                      register
```

```
    SLA      (HL)     <no 8080>
```

Perform an arithmetic shift left on the memory byte pointed to by the HL pair. Bit 7 is moved to the carry flag. A zero is moved into bit zero. This operation doubles the original value.

Bits affected: C, P, S, Z
Bits reset: H, N

```
    SLA      (IX+dd)        <no 8080>
    SLA      (IY+dd)        <no 8080>
```

Perform an arithmetic shift left on the memory byte pointed to by the index register plus the displacement. Bit 7 is moved to the carry flag. A zero is moved into bit zero. This operation doubles the original value.

Bits affected: C, P, S, Z
Bits reset: H, N

```
    SLA      r        <no 8080>
```

Perform an arithmetic shift left on register r. Bit 7 is moved to the carry flag. A zero is moved into bit zero. This operation doubles the original value. Note: SLA A performs the same task that another instruction ADD A,A does, but the former instruction takes twice as long as the latter.

Bits affected: C, P, S, Z
Bits reset: H, N

The following SRA instructions shift bits to the right.

```
              !---!---!---!---!---!---!---!---!      !---!
   !-->   !    -> -> -> -> -> -> -> ->----->   !   !
   !      !---!---!---!---!---!---!---!---!      !---!
   !          !          register                  carry
   !---<---!
```
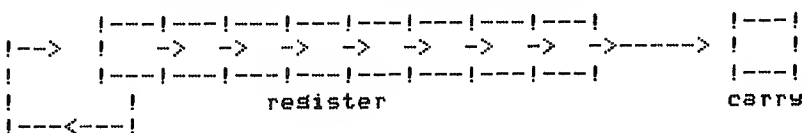
```
    SRA       (HL)      <no 8080>
```

Perform an arithmetic shift right on the memory byte pointed to by the HL pair. Bit zero moves to the carry flag. Bit 7 is duplicated in bit 6.

    Bits affected: C, P, S, Z
    Bits reset: H, N

```
    SRA       (IX+dd)          <no 8080>
    SRA       (IY+dd)          <no 8080>
```

Perform an arithmetic shift right on the byte pointed to by the index register plus the displacement. Bit zero moves to carry and bit 7 is duplicated into bit 6.

    Bits affected: C, P, S, Z
    Bits reset: H, N

```
    SRA       r        <no 8080>
```

Perform an arithmetic shift right on register r. Bit zero moves to carry and bit 7 is duplicated into bit 6. The operation effectively halves the register value. The carry flag represents the remainder. The carry flag is set if the original number was odd.

    Bits affected: C, P, S, Z
    Bits reset: H, N

The following SRL instructions shift bits to the right.

```
        !---!---!---!---!---!---!---!---!           !---!
0 -->   !   ->   ->   ->   ->   ->   ->   ->   ->----->  !   !
        !---!---!---!---!---!---!---!---!           !---!
                  register                          carry
```

```
    SRL       (HL)      <no 8080>
```

Perform a logical shift right on the byte pointed to by the HL register pair. A zero bit is moved into bit 7. Bit zero moves to the carry flag.

    Bits affected: C, P, Z
    Bits reset: H, N, S

```
    SRL       (IX+dd)          <no 8080>
    SRL       (IY+dd)          <no 8080>
```

Perform a logical shift right on the byte pointed to by the index register plus the displacement. A zero bit is moved into bit 7. Bit zero moves to the carry flag.

Bits affected: C, P, Z
Bits reset: H, N, S

```
SRL      r        <no 8080>
```

Perform a logical shift right on register r. A zero bit is moved into bit 7. Bit zero moves to the carry flag.

Bits affected: C, P, S, Z
Bits reset: H, N

```
SUB      (HL)     <SUB     M>
```

Subtract the memory byte referenced by the HL pair from the accumulator. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag set: N

```
SUB      (IX+dd)           <no 8080>
SUB      (IY+dd)           <no 8080>
```

Subtract the memory byte referenced by the index register plus the displacement from the value in the accumulator. The result is placed in A.

Flags affected: C, H, O, S, Z
Flag set: N

```
SUB      r        <SUB     r>
```

Subtract the specified CPU register from the accumulator. The result is placed in the accumulator. Notice that Z-80 SUB mnemonic has only one operand, whereas there are two operands in the corresponding 8-bit ADC, ADD, and SBC mnemonics. The destination operand for all four of these instructions is always the accumulator. Consequently, the first operand is optional with some assemblers.

Flags affected: C, H, O, S, Z
Flag set: N

```
SUB      nn       <SUI     nn>
```

Subtract the immediate byte nn from the accumulator. The result is placed in the accumulator.

Flags affected: C, H, O, S, Z
Flag set: N

```
XOR      (HL)           <XRA    M>
```

Perform a logical exclusive OR with the accumulator and the byte referenced by the HL pair. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, H, N

```
XOR      (IX+dd)        <no 8080>
XOR      (IY+dd)        <no 8080>
```

Perform a logical exclusive OR with the accumulator and the byte referenced by the sum of specified index register and the displacement. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, H, N

```
XOR      r              <XRA    r>
```

Perform a logical exclusive OR with the accumulator and register r. The result is placed in the accumulator. The XOR A instruction is an efficient way to zero the accumulator, although all the flags are then reset. XOR A is also used to reset the carry flag.

Flags affected: P, S, Z
Flags reset: C, H, N

```
XOR      nn             <XRI    nn>
```

Perform a logical exclusive OR with the accumulator and the byte nn. The result is placed in the accumulator.

Flags affected: P, S, Z
Flags reset: C, H, N

APPENDIX I

Abbreviations and Acronyms

A/D	Analogue to Digital
APL	A Programming Language
ASCII	American Standard Code for Information Interchange
BCD	Binary-Coded Decimal
BDOS	Basic Disk-Operating System (CP/M)
BIOS	Basic Input/Output System (CP/M)
Bit	BInary digiT
BJT	Bipolar Junction Transistor
CBIOS	Customized Bios (CP/M)
CCD	Charge-Coupled Device
CCP	Console Command Processor (CP/M)
CMOS	Complementary Metal-Oxide Semiconductor
COBOL	COmmon Business-Oriented Language
CP/M	Control Program for Microcomputers
CPU	Central Processing Unit
CRC	Cyclical-Redundancy Check
CRT	Cathode Ray Tube
CTS	Clear To Send
D/A	Digital to Analogue
DCD	Data-Carrier Detect
DDT	Dynamic Debugging Tool (CP/M)
DMA	Direct Memory Access
DOS	Disk-Operating System
ECL	Emitter-Coupled Logic
EOF	End Of File
EPROM	Erasable PROM
FCB	File Control Block (CP/M)
FDOS	Full DOS (CP/M)
FET	Field-Effect Transistor
FIFO	First-In, First-Out
FORTRAN	FORmula TRANslation
Hz	Hertz (cycles per second)
IC	Integrated Circuit
IGFET	Insulated-Gate FET

IIL	Integrated Injection Logic
I/O	Input/Output
JFET	Junction FET
LCD	Liquid Crystal Display
LED	Light-Emitting Diode
LIFO	Last-In, First-Out
LSB	Least-Significant Bit (or Byte)
LSI	Large-Scale Integration
MHz	Megahertz (million Hz)
MODEM	MODulator/DEModulator
MOS	Metal-Oxide Semiconductor
MOSFET	MOS FET
MSB	Most Significant Bit (or Byte)
NAND	Not AND
NOR	Not OR
OP AMP	OPerational AMPlifier
PIP	Peripheral Interchange Program (CP/M)
PPL	Phase-Locked Loop
PROM	Programmable ROM
PSW	Program-Status Word
R/W	Read/Write
RAM	Random-Access Memory
ROM	Read-Only Memory
RTS	Request To Send
SCR	Silicon-Controlled Rectifier
SID	Symbolic Instruction Debugger (CP/M)
TPA	Transient Program Area (CP/M)
TTL	Transistor-Transistor Logic
TTY	Teletype
UART	Universal Asynchronous Receiver/Transmitter
UJT	UniJunction Transistor
XOR	Exclusive OR

APPENDIX J
Undocumented
Z-80 Instructions

The Z-80 CPU contains two 16-bit index registers called IX and IY. All of the official Zilog instructions which refer to IX and IY are 16-bit operations. For example, the IX register can be assigned the constant value 1234 with the LD instruction

```
LD      IX,1234H
```

And the contents of the IY register can be saved on the stack with a PUSH operation.

```
PUSH    IY
```

A perusal of the numerically ordered Z-80 instructions, given in Appendix F, reveals that sequences beginning with the byte DD hex refer to operations involving the IX register. Similarly, the byte FD hex signifies an IY operation.

In addition to the 16-bit operations, there are many 8-bit operations that can be performed with the Z-80 index registers. These instructions are not shown in Appendix F because they have not been officially documented by Zilog. All of these 8-bit IX and IY instructions follow the same pattern. The first byte of the IX operation codes is DD hex and the first byte of the IY operation codes is FD hex. The remaining byte of the instruction is a regular Z-80 operation which refers to the H or L register. But, in this case, H now refers to the high 8 bits of the index register and L refers to the low 8 bits.

As an example, consider the Z-80 instruction:

```
LD      H,B
```

which moves the byte in register B into the H register. If this operation code is preceded by a DD hex byte, then the B register is moved into the high 8 bits of the IX register. An assembler that incorporated these undocumented instructions might generate the following source code.

```
60      LD      H,B     ;MOVE B TO H
DD60    LD      XH,B    ;MOVE B TO HIGH IX
DD6B    LD      XL,E    ;MOVE E TO LOW IX
FD67    LD      YH,A    ;MOVE A TO HIGH IY
FD69    LD      YL,C    ;MOVE C TO LOW IY
```

But, except for Allen Ashley's PDS assembler, these XH, XL, YH, and YL symbols have not actually been incorporated into Z-80 assemblers. The undocumented instructions encompass all of the 8-bit LD op codes involving the H and L registers. These include the register-to-register moves

```
LD      H,r
LD      L,r
LD      r,H
LD      r,L
```

where r is one of the general-purpose registers A, B, C, D, and E. The instructions

```
LD      L,H   and
LD      H,L
```

are also included. In this case the H and L refer respectively to the high 8 bits and the low 8 bits of the same index register. Thus, the instruction

```
LD      L,H
```

preceded by a DD byte will move the high 8 bits of the IX register into the low 8 bits. The regular H and L registers cannot be operands for these moves. Move-immediate instructions are not included in the new instructions. Furthermore, 8-bit transfers cannot be made from one index register to the other.

Many of the other 8-bit register operations can be utilized in this way. In addition to the above LD instructions, these include the following.

```
ADC     A,H     ADC     A,L
ADD     A,H     ADD     A,L
AND     H       AND     L
CP      H       CP      L
DEC     H       DEC     L
INC     H       INC     L
OR      H       OR      L
SBC     A,H     SBC     A,L
SUB     H       SUB     L
XOR     H       XOR     L
```

The rotations and shifts, the bit manipulations that set, reset and test, and the input and output operations are not included.

All of these undocumented operations can be produced with a regular Z-80 assembler. One method is to generate the initial DD or FD hex with the DEFB directive. Then, the corresponding regular Z-80 instruction follows. For example, the following two lines will generate the instruction needed to move the accumulator into the high half of IX.

```
DEFB    0DDH    ;SET FOR IX
LD      H,A     ;MOVE A TO XH
```

Alternately, a macro can be used. The definition could be

```
LDX       MACRO    REG1,REG2
          DEFB     0DDH
          LD       REG1,REG2
          ENDM
```

Then the macro call

```
    LDX       H,A
```

will generate the desired code.

Index

More than two million people have learned to program, use, and enjoy microcomputers with Wiley press guides. Look for them all at your favorite bookshop or computer store.

ANS COBOL, 2nd ed., Ashley
Apple® BASIC: Data File Programming, Finkel & Brown
Apple II® Assembly Language Exercises, Scanlon
8080/Z80 Assembly Language, Miller
6502 Assembly Language Programming, Fernandez, Tabler, & Ashley
ATARI® BASIC, Albrecht, Finkel, & Brown
ATARI® Sound and Graphics, Moore, Lower, & Albrecht
Background Math for a Computer World, 2nd ed., Ashley
BASIC, 2nd ed., Albrecht, Finkel, & Brown
BASIC for Home Computers, Albrecht, Finkel, & Brown
BASIC for the Apple II®, Brown, Finkel, & Albrecht
BASIC Key Words: A User's Guide, Adamis
BASIC Programmer's Guide to Pascal, Borgerson
BASIC Subroutines for Commodore Computers, Adamis
Byteing Deeper into Your Timex Sinclair 1000, Harrison
CP/M® for the IBM: Using CP/M-86, Fernandez & Ashley
Data File Programming In BASIC, Finkel & Brown
FAST BASIC: Beyond TRS-80® BASIC, Gratzer
Flowcharting, Stern
FORTRAN IV, 2nd ed., Friedman, Greenberg, & Hoffberg
Genie in the Computer: Kohl, Karp, & Singer
Golden Delicious Games for the Apple® Computer, Franklin, Finkel, & Koltnow
Graphics for the IBM PC, Conklin
How to Buy the Right Small Business Computer System, Smolin
IBM PC: Data File Programming, Brown & Finkel
Job Control Language, Ashley & Fernandez
Mastering the VIC-20®, Jones, Coley, & Cole
Microcomputers: A Parents' Guide, Goldberg & Sherwood
More TRS-80® BASIC, Inman, Zamora, & Albrecht
PC DOS: Using the IBM PC Operating System, Ashley & Fernandez
Structured COBOL, Ashley
Subroutine Sandwich, Grillo & Robertson
Successful Software for Small Computers, Beech
Timex Sinclair 2000 Explored, Hartnell
TRS-80® BASIC, Albrecht, Inman & Zamora
TRS-80® Color Basic, Albrecht
TRS-80® Means Business, Lewis
UNIX™ Operating System Book, Banahan & Rutter
Using VisiCalc®: Getting Down to Business, Klitzner & Plociak
What Can I Do with My Timex Sinclair? Lots!, Valentine
Why Do You Need a Personal Computer? Leventhal & Stafford

$12.95

8080/Z80 Assembly Language
Techniques For Improved Programming

By Alan R. Miller

The reveiwers are unanimous:

"Just about everything you'll ever want to know about assembly language programming,... a reference work you'll use for years to come." — *Microcomputing*

"This book is for intermediate and advanced programmers, but its clarity and organization can provide even a beginning programmer with an avenue to advanced techniques."
—*Interface Age*

"A truly definitive work on 8080/Z80 Assembly Language Programming—it should be on every programmer's bookshelf! Whether you are a CP/M expert or just a rank beginner at assembly language programming, this book represents a combined tutorial and reference that you will return to often." — *Lifelines*

"Bravo, Alan Miller!" — *80 Micro*

For both intermediate and advanced programmers, this complete guide to programming the 8080 and Z80 microprocessors lets you get every response your computer is capable of generating, and enables you to perform much more complex and sophisticated operations.

Learn the details of assembly language programming—easily and quickly—as you develop a powerful system monitor in a step-by-step, top-down approach. Over 100 pages of programs are included to let you develop, write, and test your own routines.

You'll start with number bases and logical operations, then move on to branching, rotation and shifting, one's and two's complement arithmetic, and stack operations. You'll find out how your assembly language programs can utilize the CP/M operating system for all input and output. There's an entire chapter devoted to assembler macros, and another whole chapter on input and output operations. Ten indispensable appendices contain all of the reference materials needed to write 8080 or Z80 assembly language programs.

Alan R. Miller, Professor of Metallurgy at the New Mexico Institute of Technology, is a Contributing Editor to *Interface Age.* He holds a Ph.D. in Engineering from the University of California, Berkeley.

More than two million people have learned to use, program, and enjoy microcomputers with Wiley Press guides. Look for them all at your favorite bookshop or computer store!

Photo: Courtesy Intel Corporation